



TEST REPORT

Reference No. : WTX20X11088153W-1
Manufacturer : Lumi United Technology Co., Ltd
Address : 8th Floor, JinQi Wisdom Valley, No.1 Tangling Road, Liuxian Ave, Taoyuan Residential District, Nanshan District, Shenzhen.China
Product : Wireless Remote Switch H1 (Double Rocker)
Test Model : WRS-R02
Standards : ETSI EN 300 328 V2.2.2 (2019-07)
Date of Receipt sample : Nov.20, 2020
Date of Test : Nov.20, 2020 to Dec.14, 2020
Date of Issue : Dec.14, 2020
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Jack Huang

Jack Huang / Project Engineer

Reviewed By:

Lion Cai

Lion Cai / RF Manager

Approved & Authorized By:

Silin Chen

Silin Chen / Manager



TABLE OF CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| 1.2 TEST STANDARDS..... | 5 |
| 1.3 TEST METHODOLOGY..... | 5 |
| 1.4 TEST FACILITY | 5 |
| 1.5 EUT SETUP AND TEST MODE..... | 6 |
| 1.6 MEASUREMENT UNCERTAINTY | 7 |
| 1.7 TEST EQUIPMENT LIST AND DETAILS | 8 |
| 2. SUMMARY OF TEST RESULTS | 9 |
| 3. RF OUTPUT POWER | 10 |
| 3.1 STANDARD APPLICABLE..... | 10 |
| 3.2 TEST PROCEDURE..... | 10 |
| 3.3 SUMMARY OF TEST RESULTS | 11 |
| 4. POWER SPECTRAL DENSITY | 13 |
| 4.1 STANDARD APPLICABLE..... | 13 |
| 4.2 TEST PROCEDURE..... | 13 |
| 4.3 SUMMARY OF TEST RESULTS | 14 |
| 5. OCCUPIED CHANNEL BANDWIDTH..... | 16 |
| 5.1 STANDARD APPLICATION | 16 |
| 5.2 TEST PROCEDURE | 16 |
| 5.3 SUMMARY OF TEST RESULTS/PLOTS | 16 |
| 6. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN | 19 |
| 6.1 STANDARD APPLICATION | 19 |
| 6.2 TEST PROCEDURE | 19 |
| 6.3 SUMMARY OF TEST RESULTS/PLOTS | 21 |
| 7. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN | 23 |
| 7.1 STANDARD APPLICABLE..... | 23 |
| 7.2 TEST PROCEDURE..... | 23 |
| 7.3 SUMMARY OF TEST RESULTS/PLOTS | 23 |
| 8. RECEIVER SPURIOUS EMISSIONS | 30 |
| 8.1 STANDARD APPLICABLE..... | 30 |
| 8.2 TEST PROCEDURE..... | 30 |
| 8.3 SUMMARY OF TEST RESULTS/PLOTS | 30 |
| 9. RECEIVER BLOCKING | 35 |
| 9.1 STANDARD APPLICATION | 35 |
| 9.2 TEST PROCEDURE..... | 38 |
| 9.3 TEST SETUP | 38 |
| 9.4 SUMMARY OF TEST RESULTS/PLOTS | 39 |
| 10. MEDIUM UTILIZATION (MU), DUTY CYCLE, TX-SEQUENCE, TX-GAP..... | 40 |
| 10.1 STANDARD APPLICATION | 40 |
| 10.2 LIMIT..... | 40 |
| 10.3 TEST PROCEDURE..... | 40 |
| 10.4 SUMMARY OF TEST RESULTS | 40 |
| EXHIBIT 1 - EUT PHOTOGRAPHS..... | 41 |
| EXHIBIT 2 - TEST SETUP PHOTO | 42 |



Report version

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00 | Dec.14, 2020 | Original |
| / | / | / |

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Manufacturer: Lumi United Technology Co., Ltd
 Address of manufacturer: 8th Floor, JinQi Wisdom Valley, No.1 Tangling Road,
 Liuxian Ave, Taoyuan Residential District, Nanshan District,
 Shenzhen.China

| General Description of EUT | |
|-----------------------------------|---|
| Product Name: | Wireless Remote Switch H1 (Double Rocker) |
| Trade Name: | Aqara |
| Model No.: | WRS-R02 |
| Adding Model(s): | / |
| Rated Voltage: | Battery DC 3V |
| Battery Capacity: | / |
| Adapter Model: | / |
| Software Version: | 0.0.0_0021 |
| Hardware Version: | T0 |

Note: The test data is gathered from a production sample, provided by the manufacturer.

| Technical Characteristics of EUT | |
|---|-----------------|
| Support Standards: | Zigbee |
| Frequency Range: | 2405MHz-2480MHz |
| Max.RF Output Power: | 10.69dBm (EIRP) |
| Modulation: | OQPSK |
| Type of Antenna: | PCB Antenna |
| Antenna Gain: | 2dBi |



1.2 Test Standards

The tests were performed according to following standards:

ETSI EN 300 328 V2.2.2 (2019-07): Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ETSI EN 300328,

The equipment under test (EUT) was configured to measure its highest possible emission level. For more detail refer to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

Use “QCOM_V1.0.exe” and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

| RF Output Power Setup | | | |
|------------------------------|----------------------|-------|-------|
| Mode | Test Frequency (MHz) | | |
| | 2405 | 2440 | 2480 |
| Zigbee | 10dBm | 10dBm | 10dBm |

| Test Mode List | | |
|-----------------------|-------------|-------------------|
| Test Mode | Description | Remark |
| TM3 | Zigbee | 2405/2440/2480MHz |

| | NTNV | LTNV | HTNV |
|--------------------|-----------|------|------|
| Temperature (°C) | 20 | -10 | 50 |
| Voltage (V) | DC 3V | | |
| Relative Humidity: | 45 %. | | |
| ATM Pressure: | 1019 mbar | | |

| EUT Cable List and Details | | | |
|-----------------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| / | / | / | / |

| Special Cable List and Details | | | |
|---------------------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| / | / | / | / |

| Auxiliary Equipment List and Details | | | |
|---|--------------|-------|---------------|
| Description | Manufacturer | Model | Serial Number |
| / | / | / | / |



1.6 Measurement Uncertainty

| Measurement uncertainty | | |
|----------------------------------|---------------------------------|------|
| Parameter | Uncertainty | Note |
| Radio frequency | $\pm 0.4 \text{ ppm}$ | (1) |
| Conducted RF Output Power | $\pm 0.42 \text{ dB}$ | (1) |
| Occupied Bandwidth | $\pm 1 \times 10^{-7}$ | (1) |
| Conducted Power Spectral Density | $\pm 0.70 \text{ dB}$ | (1) |
| Conducted Spurious Emission | $\pm 2.17 \text{ dB}$ | (1) |
| Radiated Spurious Emissions | 30-200MHz $\pm 4.52 \text{ dB}$ | (1) |
| | 0.2-1GHz $\pm 5.56 \text{ dB}$ | (1) |
| | 1-6GHz $\pm 3.84 \text{ dB}$ | (1) |
| | 6-18GHz $\pm 3.92 \text{ dB}$ | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



1.7 Test Equipment List and Details

| Description | Manufacturer | Model | Serial Number | Cal Date | Due Date |
|--------------------------------------|-----------------|-----------|---------------|------------|------------|
| Spectrum Analyzer | Agilent | N9020A | US47140102 | 2020-04-28 | 2021-04-27 |
| Signal Generator | Agilent | 83752A | 3610A01453 | 2020-04-28 | 2021-04-27 |
| Vector Signal Generator | Agilent | N5182A | MY47070202 | 2020-04-28 | 2021-04-27 |
| Power Sensor | Agilent | U2021XA | MY54250019 | 2020-04-28 | 2021-04-27 |
| Power Sensor | Agilent | U2021XA | MY54250021 | 2020-04-28 | 2021-04-27 |
| Simultaneous Sampling | Agilent | U2531A | TW54243509 | 2020-04-28 | 2021-04-27 |
| Spectrum Analyzer | Agilent | E4407B | MY41440400 | 2020-04-28 | 2021-04-27 |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | 836079/035 | 2020-04-28 | 2021-04-27 |
| EMI Test Receiver | Rohde & Schwarz | ESVB | 825471/005 | 2020-04-28 | 2021-04-27 |
| Amplifier | Agilent | 8447F | 3113A06717 | 2020-04-28 | 2021-04-27 |
| Amplifier | C&D | PAP-1G18 | 2002 | 2020-04-28 | 2021-04-27 |
| Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 9163-333 | 2019-05-05 | 2021-05-04 |
| Horn Antenna | ETS | 3117 | 00086197 | 2019-05-05 | 2021-05-04 |
| Temperature&Humidity Chamber | GONGWEN | GDJS-800 | / | 2020-04-28 | 2021-04-27 |
| DC Power Supply | ATTEN | APS3005Dm | / | 2020-04-28 | 2021-04-27 |
| Universal Radio Communication Tester | Rohde & Schwarz | CMW500 | / | 2020-04-28 | 2021-04-27 |

| Software List | | | |
|--|--------------|--------|---------|
| Description | Manufacturer | Model | Version |
| EMI Test Software (Radiated Emission)* | Farad | EZ-EMC | RA-03A1 |

*Remark: indicates software version used in the compliance certification testing



2. SUMMARY OF TEST RESULTS

| Standards | Reference | Description of Test Item | Result |
|------------|---------------------|--|--------|
| EN 300 328 | 4.3.1.2 / 4.3.2.2 | RF Output Power | Passed |
| | 4.3.2.3 | Power Spectral Density | Passed |
| | 4.3.1.3 / 4.3.2.4 | Duty Cycle, Tx-sequence, Tx-gap | Passed |
| | 4.3.1.4 | Accumulated Transmit Time, Frequency Occupation and Hopping Sequence | N/A |
| | 4.3.1.5 | Hopping Frequency Separation | N/A |
| | 4.3.1.6 / 4.3.2.5 | Medium Utilisation (MU) Factor | Passed |
| | 4.3.1.7 / 4.3.2.6 | Adaptivity (Adaptive Frequency Hopping) | N/A |
| | 4.3.1.8 / 4.3.2.7 | Occupied Channel Bandwidth | Passed |
| | 4.3.1.9 / 4.3.2.8 | Transmitter Unwanted Emissions in the Out-of-band Domain | Passed |
| | 4.3.1.10 / 4.3.2.9 | Transmitter Unwanted Emissions in the Spurious Domain | Passed |
| | 4.3.1.11 / 4.3.2.10 | Receiver Spurious Emissions | Passed |
| | 4.3.1.12 / 4.3.2.11 | Receiver Blocking | Passed |
| | 4.3.1.13 / 4.3.2.12 | Geo-location capability | N/A |

Passed: The EUT complies with the essential requirements in the standard.

Failed: The EUT does not comply with the essential requirements in the standard.

N/A: Not applicable.



3. RF Output Power

3.1 Standard Applicable

According to Section 4.3.1.2.3, the maximum RF output power for adaptive Frequency Hopping equipment shall be equal to or less than 20 dBm. The maximum RF output power for non-adaptive Frequency Hopping equipment, shall be declared by the supplier. The maximum RF output power for this equipment shall be equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm.

According to Section 4.3.2.2.3, for adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

3.2 Test Procedure

According to section 5.4.2.2.1.2 of the standard EN 300328, the test procedure shall be as follows:

Step 1:

- Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s.
- Use the following settings: - Sample speed 1 MS/s or faster.
 - The samples must represent the power of the signal.
- Measurement duration: For non-adaptive equipment: equal to the observation period defined in clauses 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than half the time between two samples.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps..

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>



The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 5:


- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below: $P = A + G + Y$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

3.3 Summary of Test Results

| Test conditions | Channel | EIRP (dBm) | Limit (dBm) | Result |
|-----------------|---------|------------|-------------|--------|
| NTNV | Low | 10.69 | 20.00 | Pass |
| | Middle | 10.48 | | |
| | High | 10.23 | | |
| LTNV | Low | 10.64 | 20.00 | Pass |
| | Middle | 10.43 | | |
| | High | 10.18 | | |
| HTNV | Low | 10.67 | 20.00 | Pass |
| | Middle | 10.46 | | |
| | High | 10.21 | | |

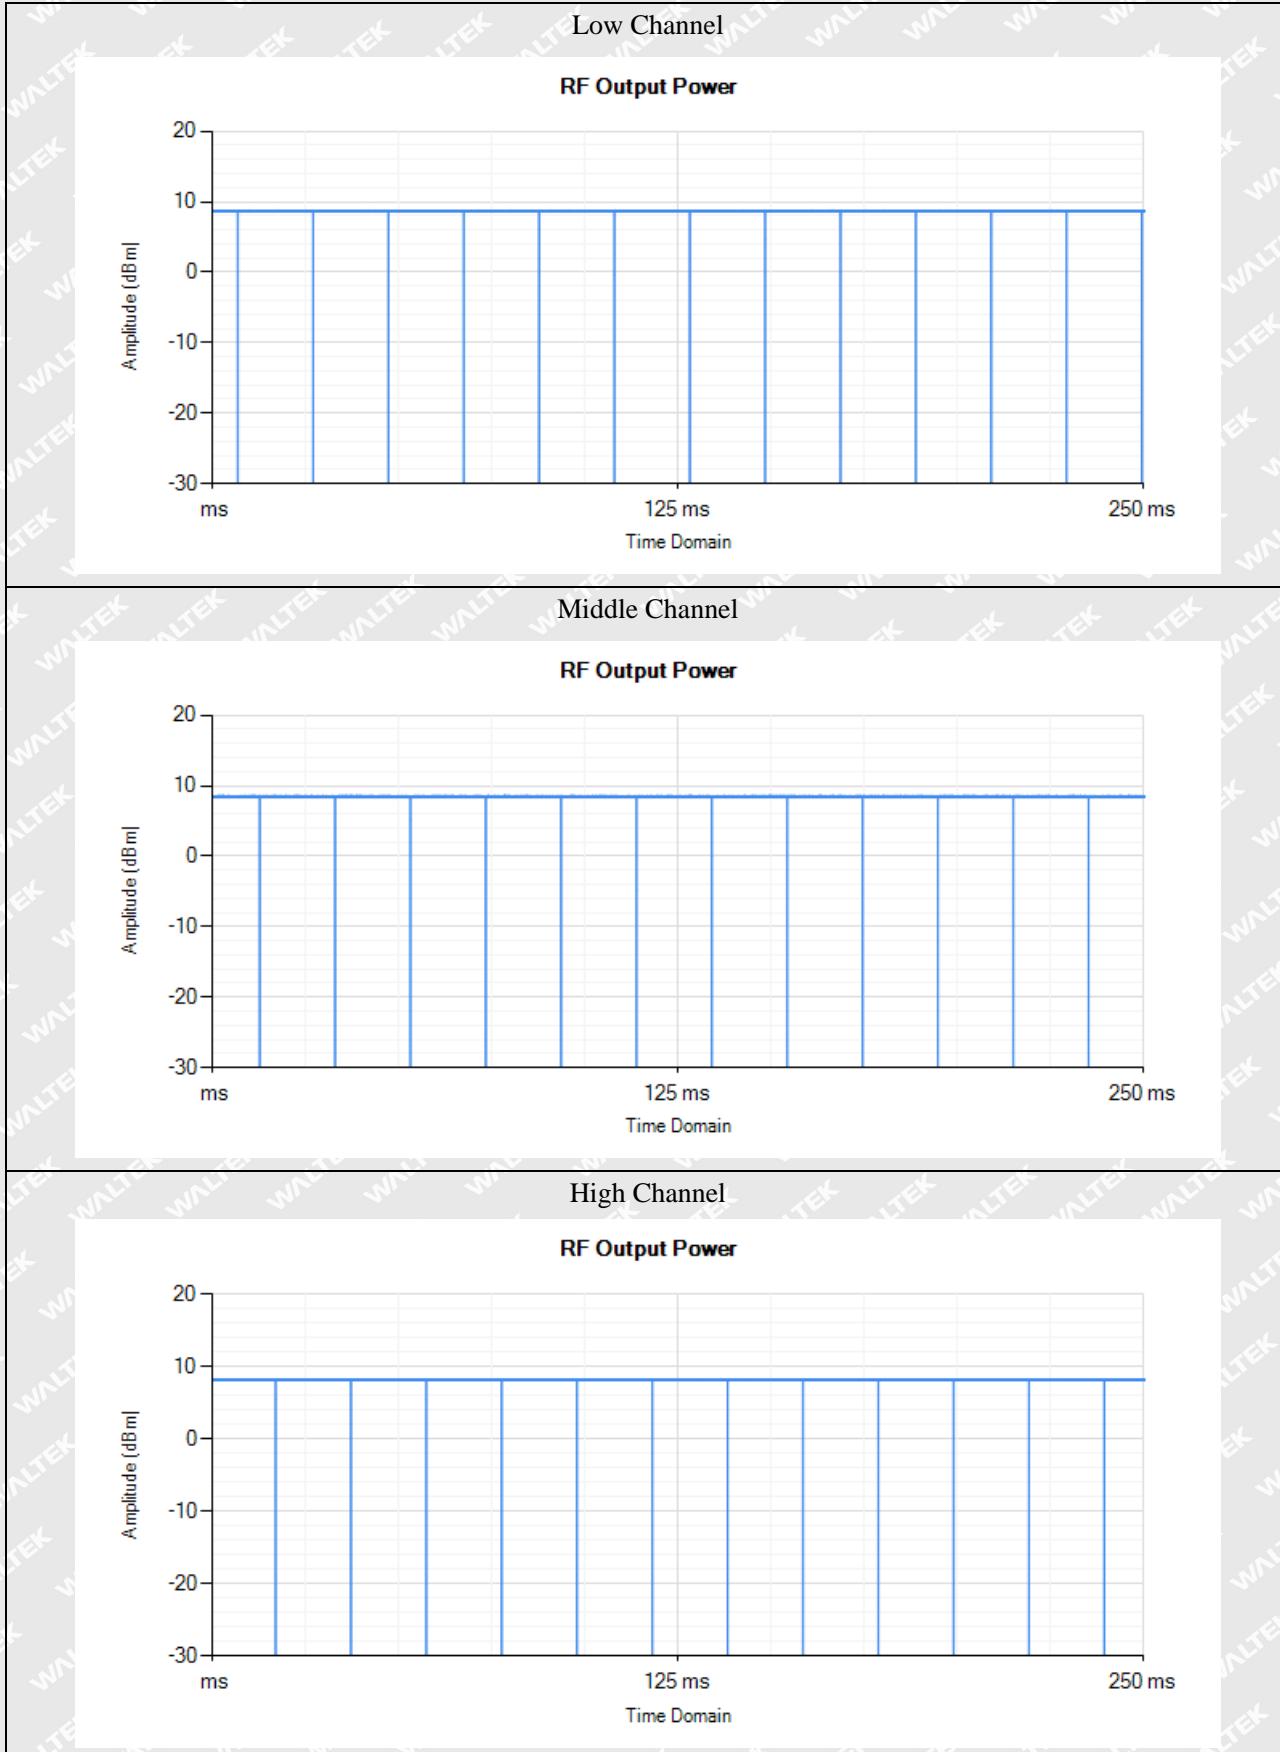



4. Power Spectral Density

4.1 Standard Applicable

According to Section 4.3.2.3.3, For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

4.2 Test Procedure

According to section 5.4.3.2.1 of the standard EN 300328, the test procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400MHz
- Stop Frequency: 2 483.5MHz
- Resolution BW: 10kHz
- Video BW: 30kHz
- Sweep Points: > 8 350

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 4:

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>



with 'n' being the actual sample number

Step 5:

Starting from the first sample $P_{\text{Samplecorr}}(n)$ (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

Step 7:

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

RBW/VBW=10/30 kHz


4.3 Summary of Test Results

| Test Mode | Test Frequency | Spectral Density | Limit |
|------------------|-----------------------|-------------------------|----------------|
| | MHz | dBm/MHz | dBm/MHz |
| Zigbee | 2402 | 9.44 | 10 |
| | 2440 | 9.17 | 10 |
| | 2480 | 8.87 | 10 |




Low Channel

Power Spectral Density

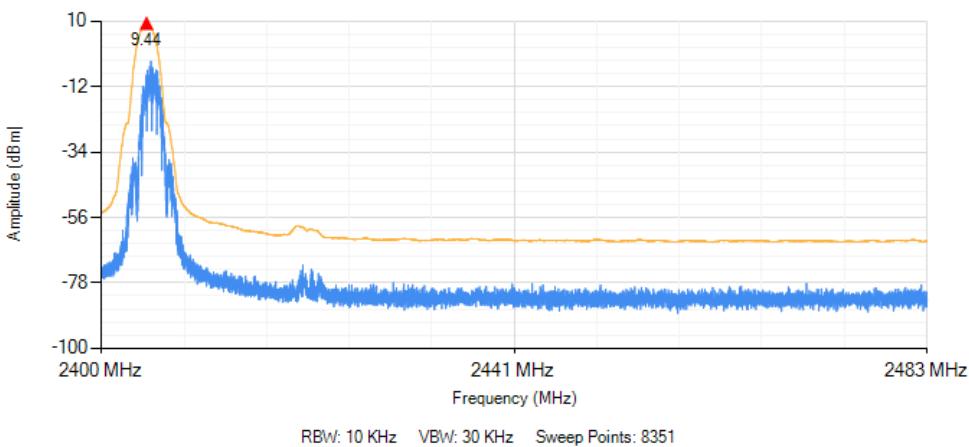


Middle Channel

Power Spectral Density

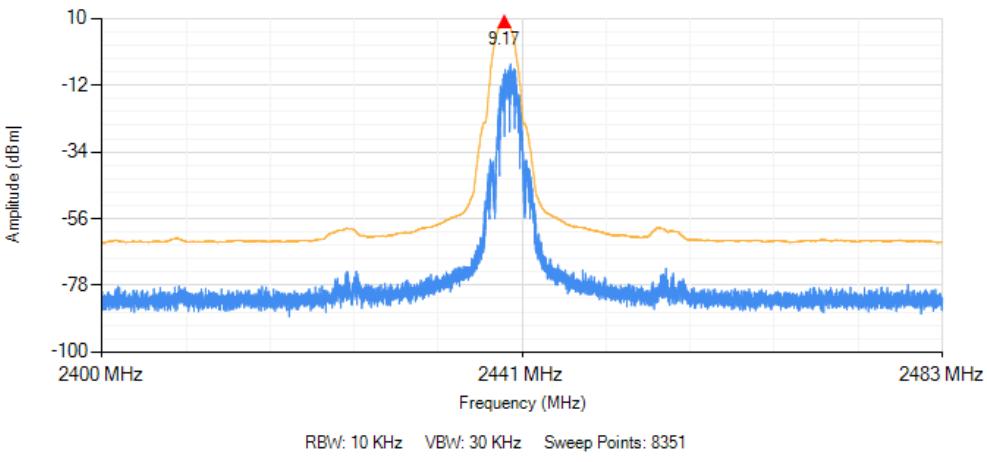

High Channel

Power Spectral Density

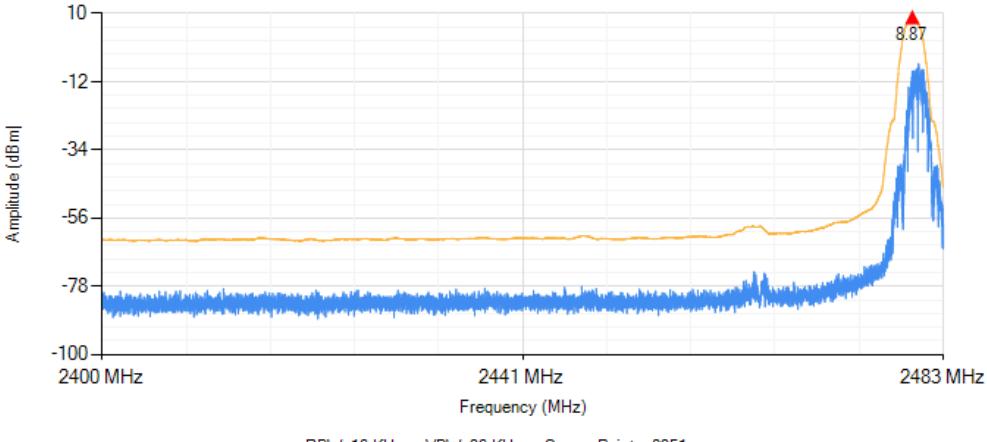



5. Occupied Channel Bandwidth

5.1 Standard Application

According to section 4.3.1.8.3, the Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band given in clause 1.

For non-adaptive Frequency Hopping equipment with e.i.r.p greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the value declared by the supplier. This declared value shall not be greater than 5 MHz.

According to section 4.3.2.7.3, the Occupied Channel Bandwidth shall fall completely within the band given in clause 1. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

5.2 Test procedure

According to the section 5.4.7.2.1, the measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: $3 \times \text{RBW}$
- Frequency Span for frequency hopping equipment: Lowest frequency separation that is used within the hopping sequence
- Frequency Span for other types of equipment: $2 \times \text{Nominal Channel Bandwidth}$ (e.g. 40 MHz for a 20 MHz channel)
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

Step 2:

Wait until the trace is completed.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

5.3 Summary of Test Results/Plots




| Mode | Channel | 99% OBW | Measured Frequency (MHz) | | Limit (MHz) | Result |
|--------|---------|---------|--------------------------|----------|-----------------|--------|
| | | | Low | High | | |
| Zigbee | Low | 2.06 | 2403.98 | 2406.04 | 2400.00~2483.50 | Pass |
| | High | 2.07 | 2478.965 | 2481.035 | | |

WALTEK




Low Channel

Occupied Channel Bandwidth

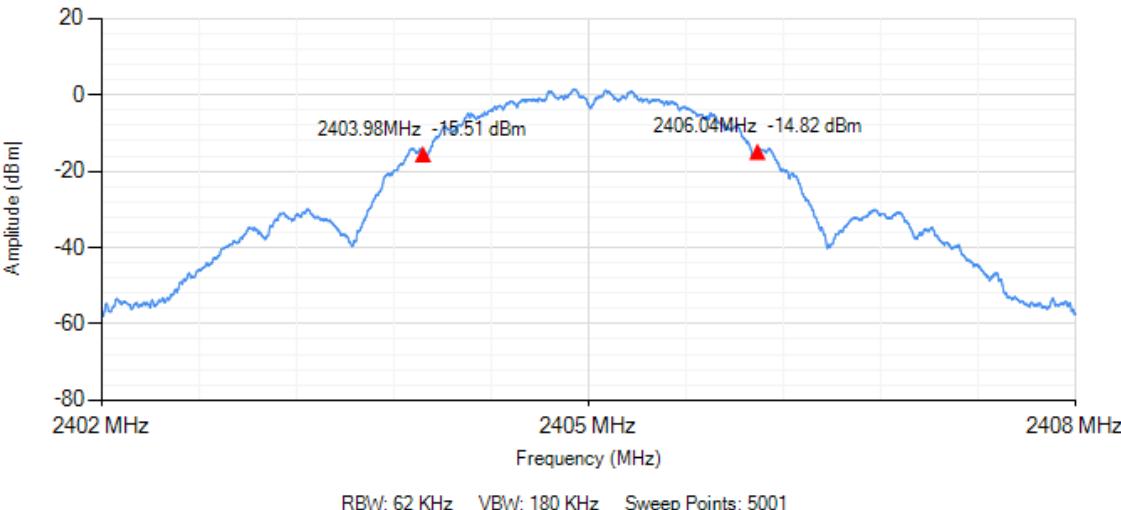

High Channel


Occupied Channel Bandwidth

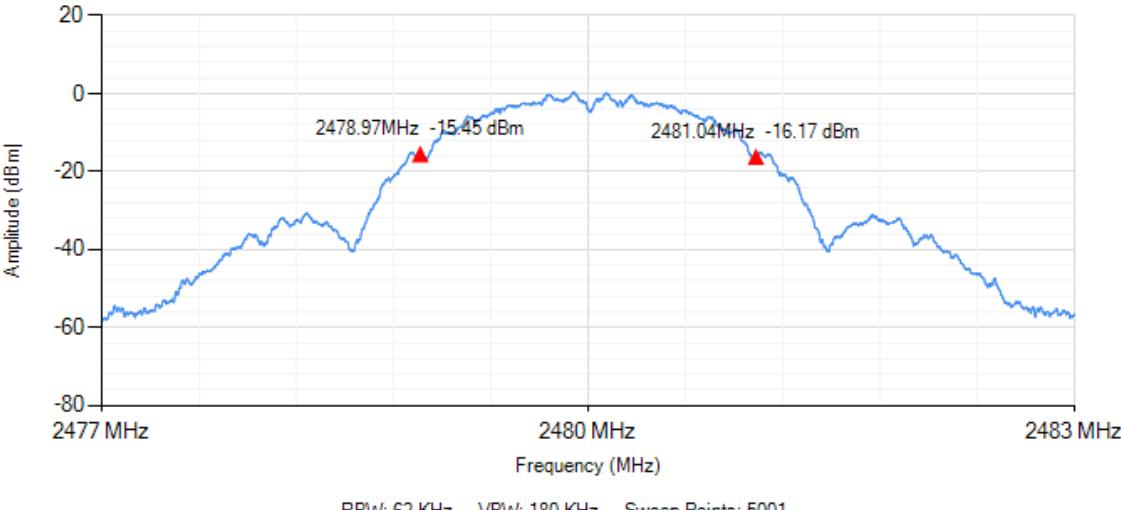

6. Transmitter Unwanted Emissions in the Out-of-band Domain

6.1 Standard Application

According to section 4.3.1.9.3&4.3.2.8.3, the transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure below:

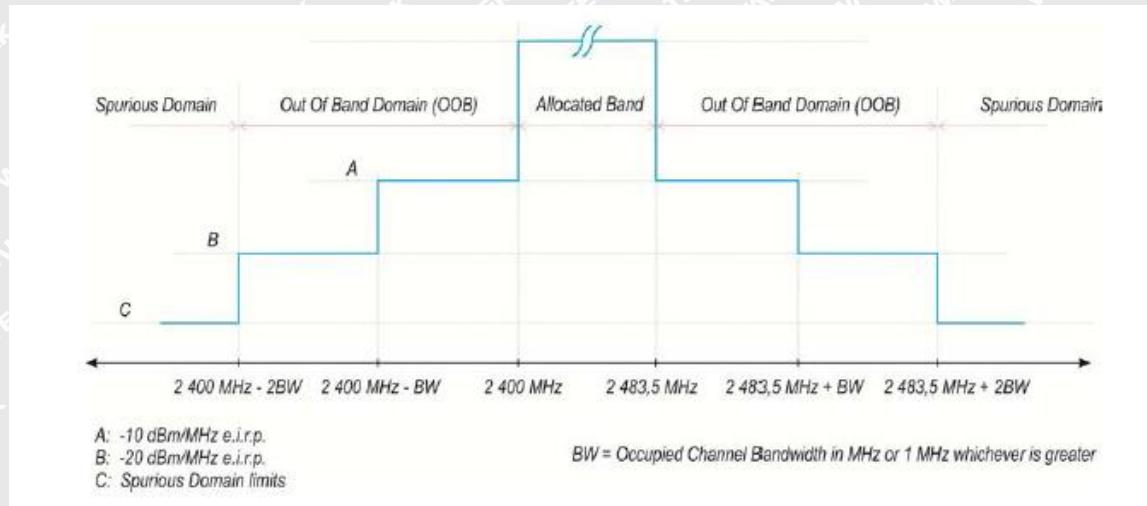

Within the 2 400 MHz to 2 483,5 MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement

6.2 Test procedure

According to the section 5.4.8.2.1, the measurement procedure shall be as follows:

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
 - Centre Frequency: 2 484MHz
 - Span: 0Hz
 - Resolution BW: 1MHz
 - Filter mode: Channel filter
 - Video BW: 3 MHz
 - Detector Mode: RMS
 - Trace Mode: Max Hold
 - Sweep Mode: Continuous
 - Sweep Points: Sweep Time [s] / (1 μ s) or 5 000 whichever is greater
 - Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.



- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2: (segment 2 483.5 MHz to 2 483.5 MHz + BW)

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483.5 MHz to 2 483.5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483.5 MHz + BW - 0.5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3: (segment 2 483.5 MHz + BW to 2 483.5 MHz + 2BW)

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483.5 MHz + BW to 2 483.5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483.5 MHz + 2 BW - 0.5 MHz.

Step 4: (segment 2 400 MHz - BW to 2 400 MHz)

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0.5 MHz.

Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)

- Change the centre frequency of the analyser to 2 399.5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0.5 MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>



limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.

NOTE 2: A ch refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.


RBW=1MHz VBW=3MHz

6.3 Summary of Test Results/Plots

| Test CH. | Test Segment | Max. Emissions Reading (dBm) | | Limit |
|--------------------------|-------------------------|------------------------------|--------|-------|
| | | MHz | Normal | |
| Test Mode: Zigbee | | | | |
| Low | 2400-BW to 2400 | -53.291 | | -10 |
| | 2400-2BW to 2400-BW | -55.441 | | -20 |
| High | 2483.5 to 2483.5+BW | -51.289 | | -10 |
| | 2483.5+BW to 2483.5+2BW | -55.259 | | -20 |

Note 1: BW please refer to section 7.3

Note 2: the data just list the worst cases

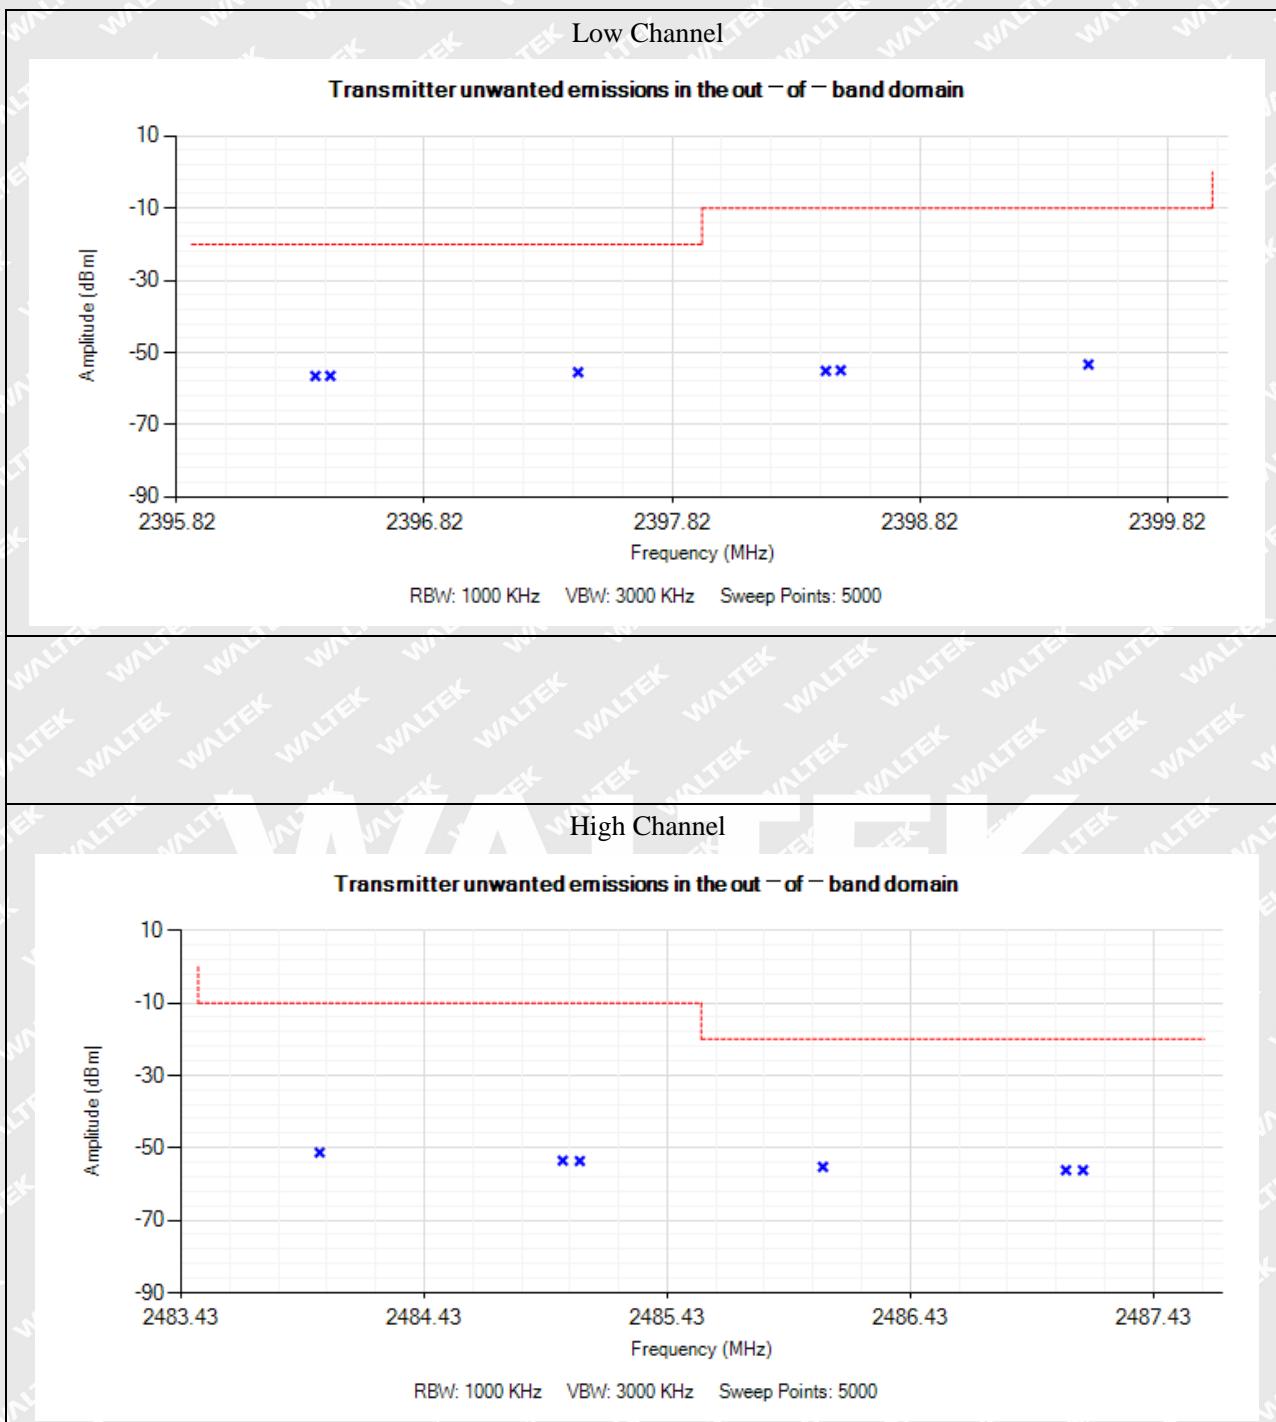



7. Transmitter Unwanted Emissions in the Spurious Domain

7.1 Standard Applicable

According to section 4.3.1.10.3& 4.3.2.9.3, the transmitter unwanted emissions in the spurious domain shall not exceed the values given in the following table.

Transmitter limit for spurious emissions

| Frequency range | Maximum power | Bandwidth |
|---------------------|---------------|-----------|
| 30 MHz to 47 MHz | -36 dBm | 100 kHz |
| 47 MHz to 74 MHz | -54 dBm | 100 kHz |
| 74 MHz to 87,5 MHz | -36 dBm | 100 kHz |
| 87,5 MHz to 118 MHz | -54 dBm | 100 kHz |
| 118 MHz to 174 MHz | -36 dBm | 100 kHz |
| 174 MHz to 230 MHz | -54 dBm | 100 kHz |
| 230 MHz to 470 MHz | -36 dBm | 100 kHz |
| 470 MHz to 694 MHz | -54 dBm | 100 kHz |
| 694 MHz to 1 GHz | -36 dBm | 100 kHz |
| 1 GHz to 12,75 GHz | -30 dBm | 1 MHz |

7.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.9.2


RBW=100kHz VBW=300kHz 30MHz-1GHz
 RBW=1MHz VBW=3MHz 1GHz-12.75GHz

7.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst cases:




- Spurious Emission From 30MHz To 1GHz
For Zigbee

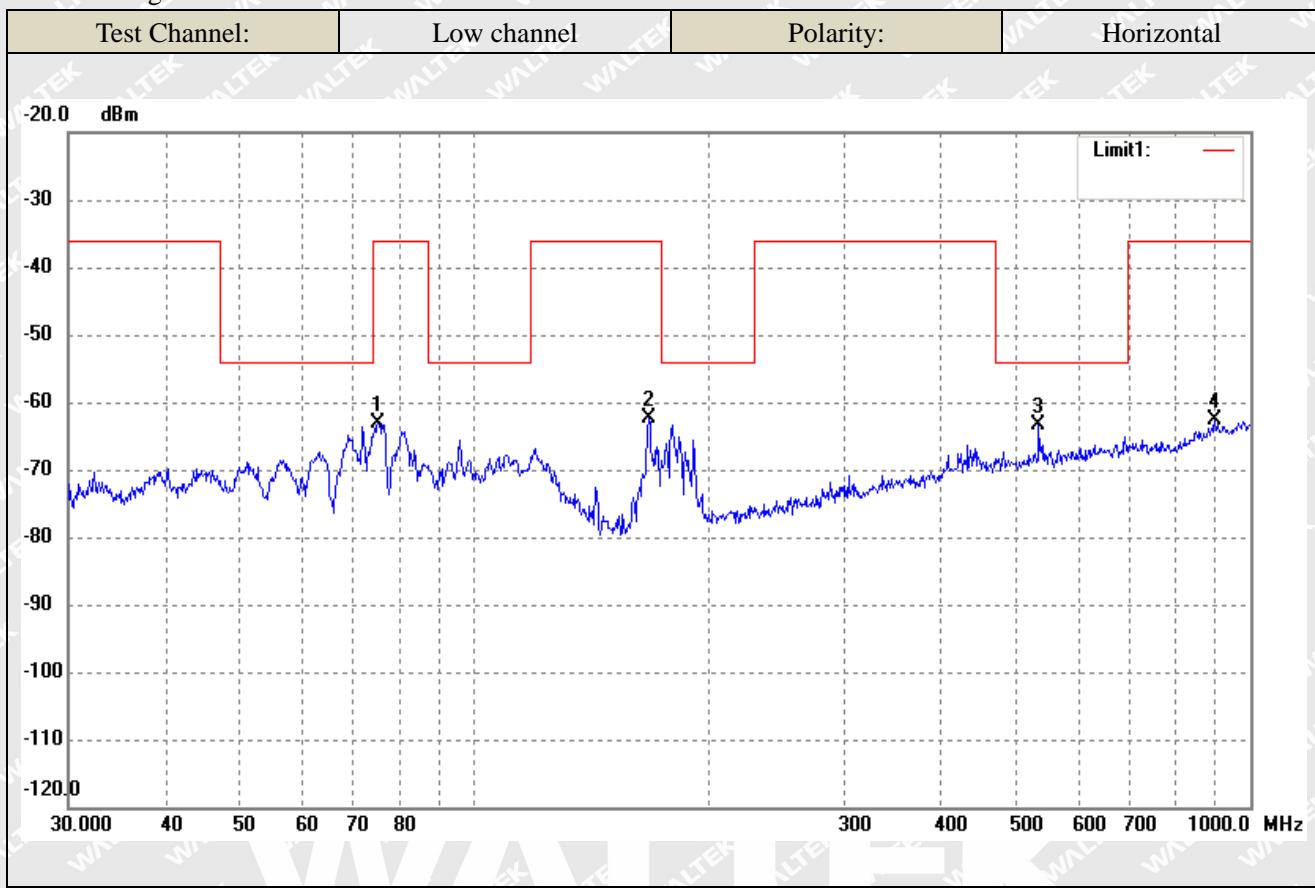


| No. | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|-----|-----------|---------|------------|--------|--------|--------|--------|
| | (MHz) | (dBm) | Factor(dB) | (dBm) | (dBm) | (dB) | |
| 1 | 75.1822 | -58.82 | -4.27 | -63.09 | -36.00 | -27.09 | ERP |
| 2 | 167.8243 | -59.00 | -3.34 | -62.34 | -36.00 | -26.34 | ERP |
| 3 | 533.8321 | -71.16 | 7.76 | -63.40 | -54.00 | -9.40 | ERP |
| 4 | 900.1474 | -75.96 | 13.35 | -62.61 | -36.00 | -26.61 | ERP |

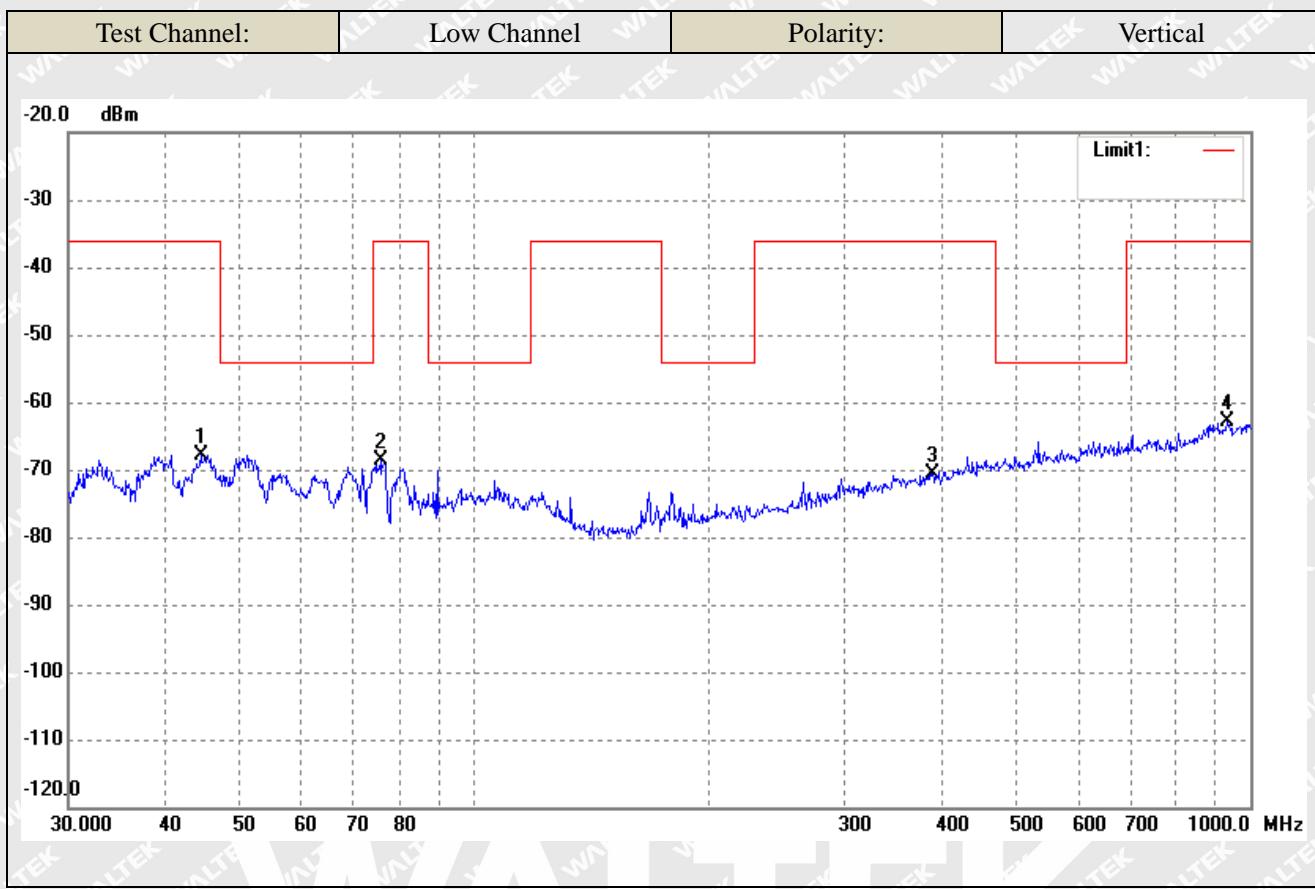

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 44.4308 | -67.87 | -0.02 | -67.89 | -36.00 | -31.89 | ERP |
| 2 | 75.9773 | -64.27 | -4.38 | -68.65 | -36.00 | -32.65 | ERP |
| 3 | 389.3549 | -75.60 | 5.04 | -70.56 | -36.00 | -34.56 | ERP |
| 4 | 932.2715 | -76.38 | 13.51 | -62.87 | -36.00 | -26.87 | ERP |

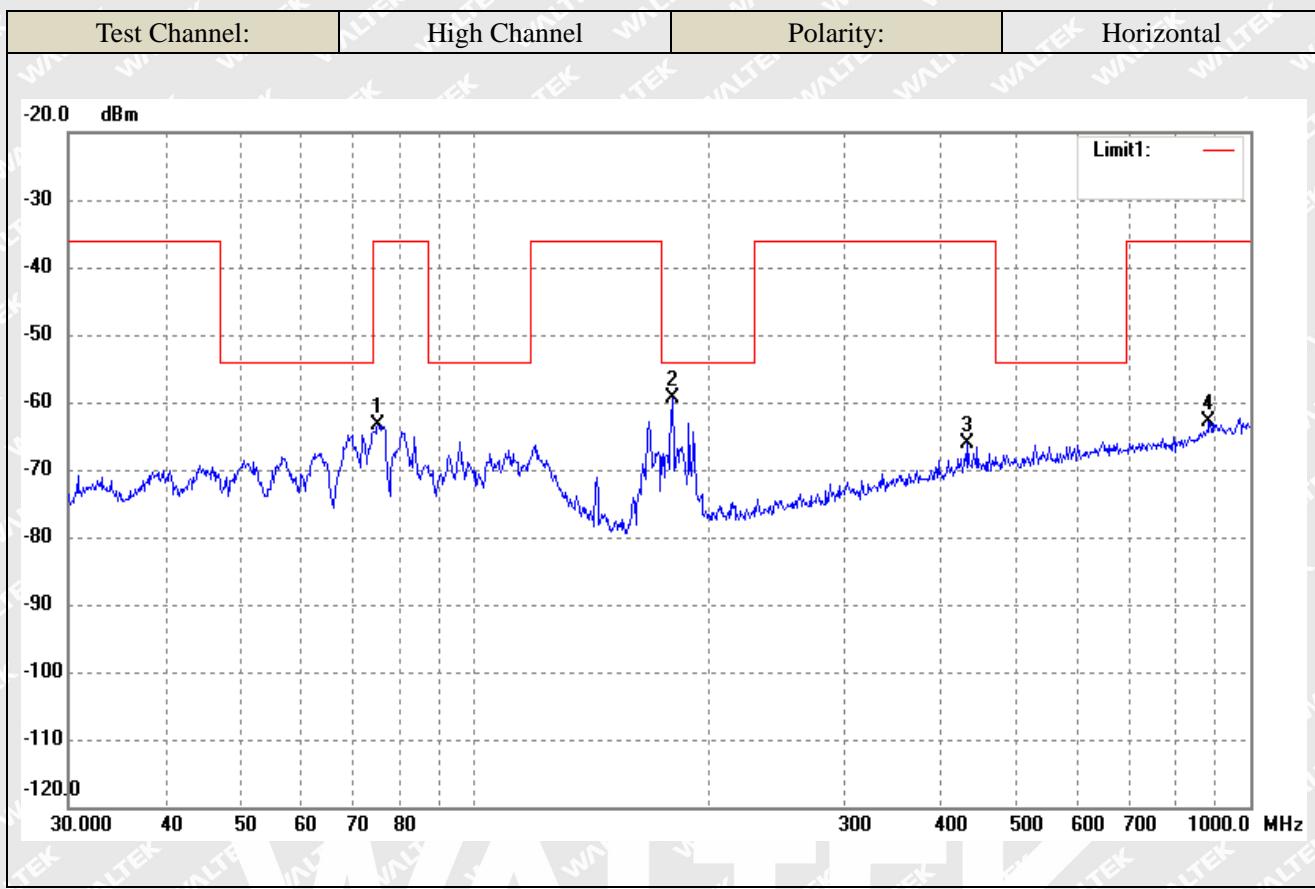

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 75.1823 | -59.00 | -4.27 | -63.27 | -36.00 | -27.27 | ERP |
| 2 | 180.0165 | -56.85 | -2.51 | -59.36 | -54.00 | -5.36 | ERP |
| 3 | 432.5457 | -72.15 | 6.01 | -66.14 | -36.00 | -30.14 | ERP |
| 4 | 884.5029 | -75.71 | 12.72 | -62.99 | -36.00 | -26.99 | ERP |

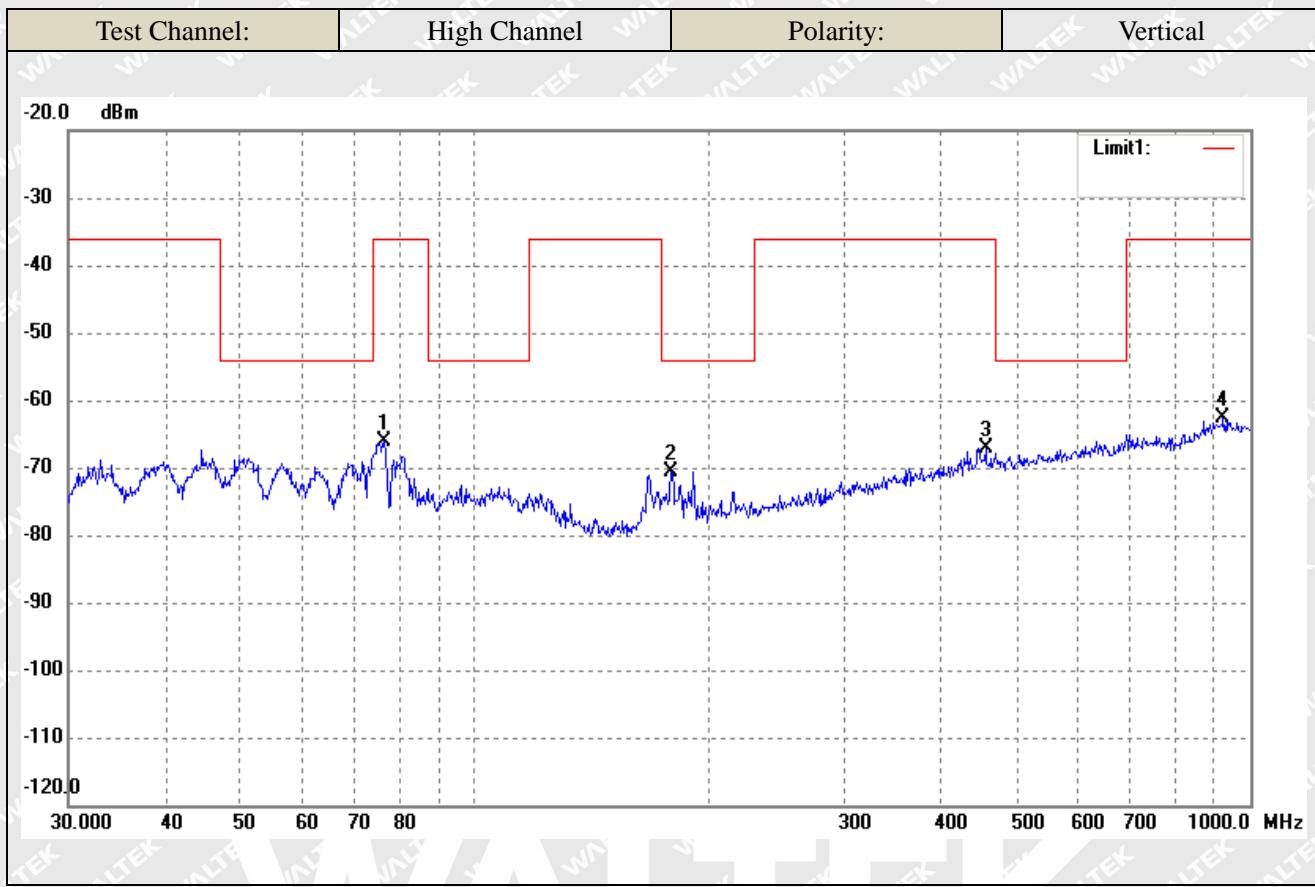

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 76.5121 | -61.62 | -4.47 | -66.09 | -36.00 | -30.09 | ERP |
| 2 | 179.3863 | -68.11 | -2.55 | -70.66 | -54.00 | -16.66 | ERP |
| 3 | 455.9058 | -73.44 | 6.39 | -67.05 | -36.00 | -31.05 | ERP |
| 4 | 922.5157 | -76.35 | 13.63 | -62.72 | -36.00 | -26.72 | ERP |



➤ Spurious Emission Above 1GHz

For Zigbee


| Frequency (MHz) | Reading (dBm) | Correct dB | Result (dBm) | Limit (dBm) | Margin (dB) | Polar |
|----------------------|------------------|---------------|-----------------|----------------|----------------|-------|
| Low Channel-2402MHz | | | | | | |
| 3983.750 | -54.32 | 5.04 | -49.28 | -30.00 | -19.28 | H |
| 5574.673 | -53.74 | 7.83 | -45.91 | -30.00 | -15.91 | H |
| 9935.053 | -55.60 | 14.01 | -41.59 | -30.00 | -11.59 | H |
| 3993.903 | -54.70 | 5.06 | -49.64 | -30.00 | -19.64 | V |
| 6594.518 | -54.50 | 9.53 | -44.97 | -30.00 | -14.97 | V |
| 9960.375 | -55.99 | 14.05 | -41.94 | -30.00 | -11.94 | V |
| High Channel-2480MHz | | | | | | |
| 3795.660 | -50.46 | 4.87 | -45.59 | -30.00 | -15.59 | H |
| 6594.518 | -54.43 | 9.53 | -44.90 | -30.00 | -14.90 | H |
| 9441.913 | -54.77 | 13.28 | -41.49 | -30.00 | -11.49 | H |
| 3795.660 | -50.56 | 4.87 | -45.69 | -30.00 | -15.69 | V |
| 6561.030 | -55.07 | 9.52 | -45.55 | -30.00 | -15.55 | V |
| 9088.189 | -55.59 | 12.76 | -42.83 | -30.00 | -12.83 | V |

Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 4th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note 2: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.



➤ **Conducted Transmitter Spurious Emission:**

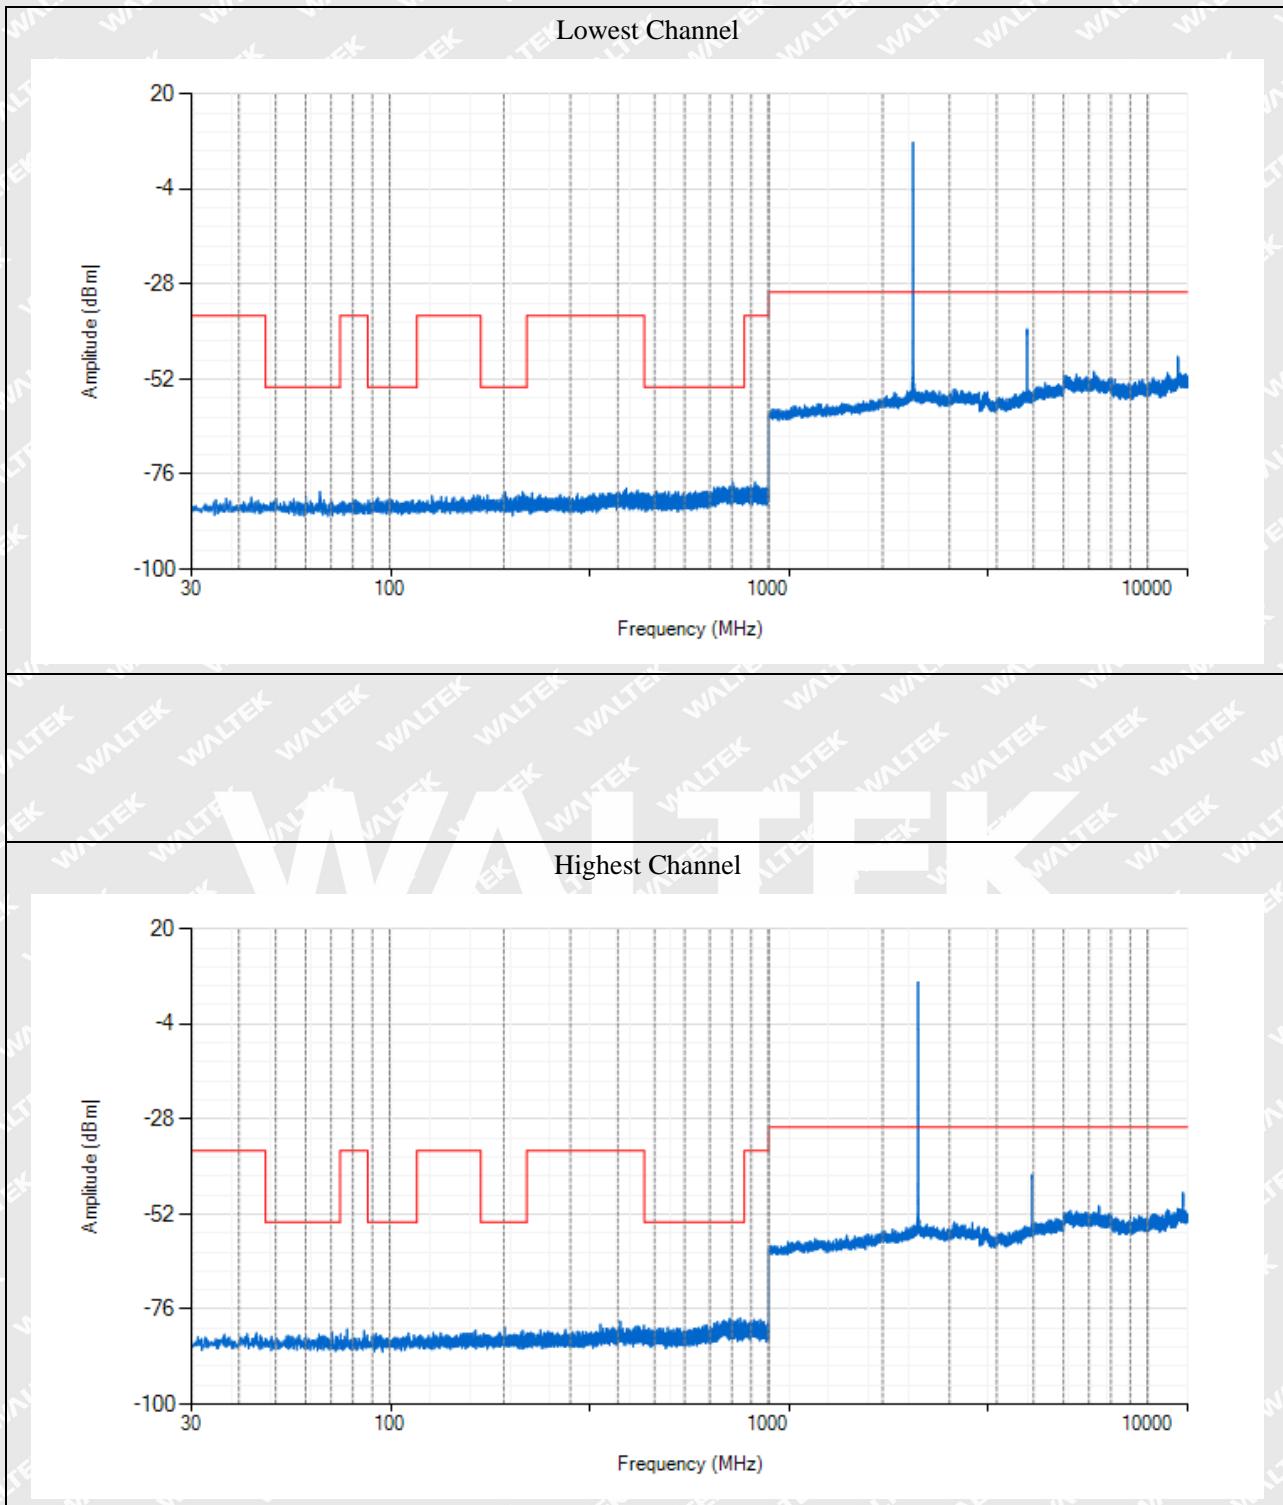

Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which emissions are too small are not list above.



8. Receiver Spurious Emissions

8.1 Standard Applicable

According to section 4.3.1.11.3&4.3.2.10.3, the spurious emissions of the receiver shall not exceed the values given in table below:

NOTE: In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment. Spurious emission limits for receivers

| Frequency range | Maximum power | Bandwidth |
|--------------------|---------------|-----------|
| 30 MHz to 1 GHz | -57 dBm | 100 kHz |
| 1 GHz to 12,75 GHz | -47 dBm | 1 MHz |

8.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.10.2.

RBW=100kHz VBW=300kHz 30MHz-1GHz


RBW=1MHz VBW=3MHz 1GHz-12.75GHz

8.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst case:



➤ Receiver Spurious Emission From 30MHz To 1GHz

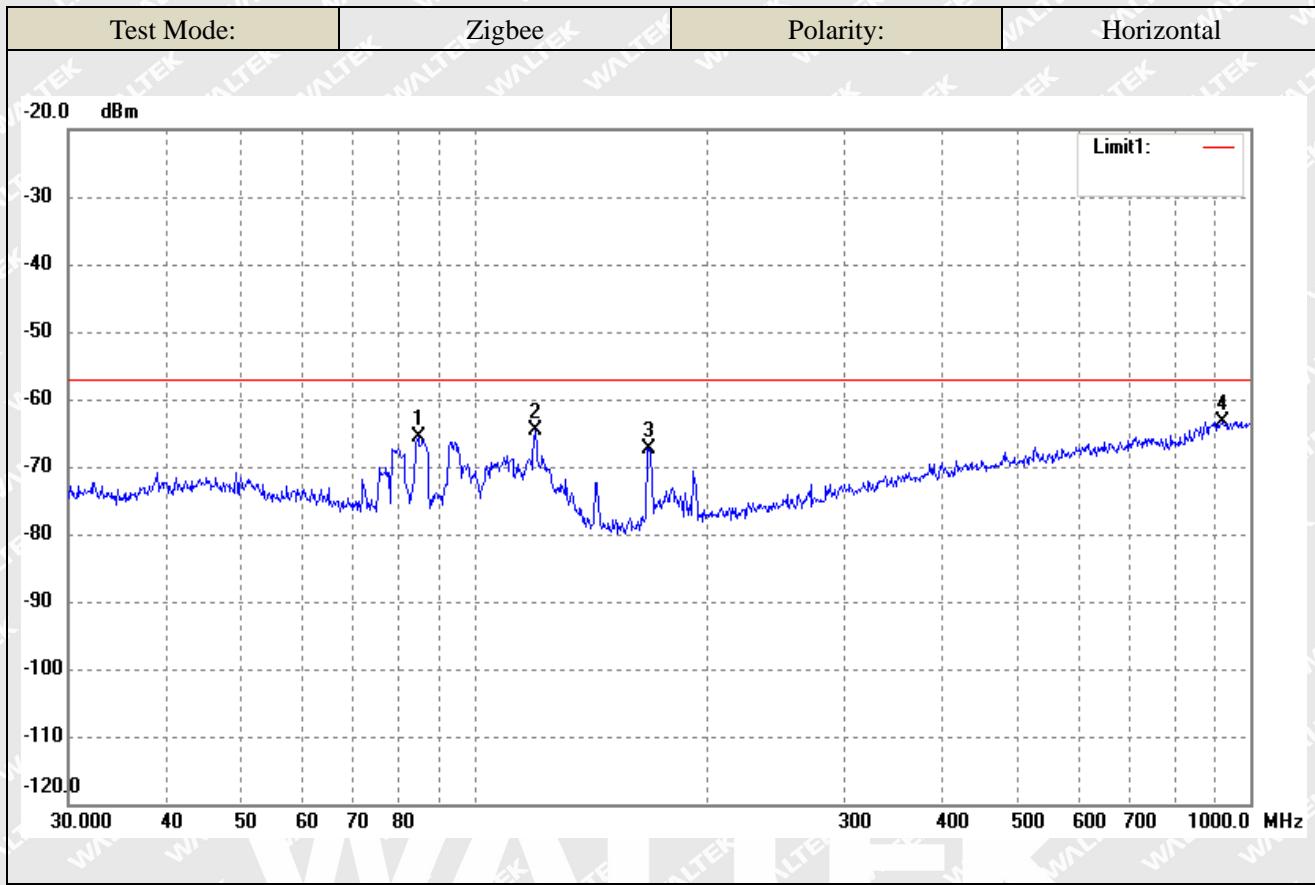

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 84.7019 | -61.32 | -4.28 | -65.60 | -57.00 | -8.60 | ERP |
| 2 | 119.8556 | -62.26 | -2.48 | -64.74 | -57.00 | -7.74 | ERP |
| 3 | 167.8243 | -64.04 | -3.34 | -67.38 | -57.00 | -10.38 | ERP |
| 4 | 919.2866 | -76.95 | 13.58 | -63.37 | -57.00 | -6.37 | ERP |

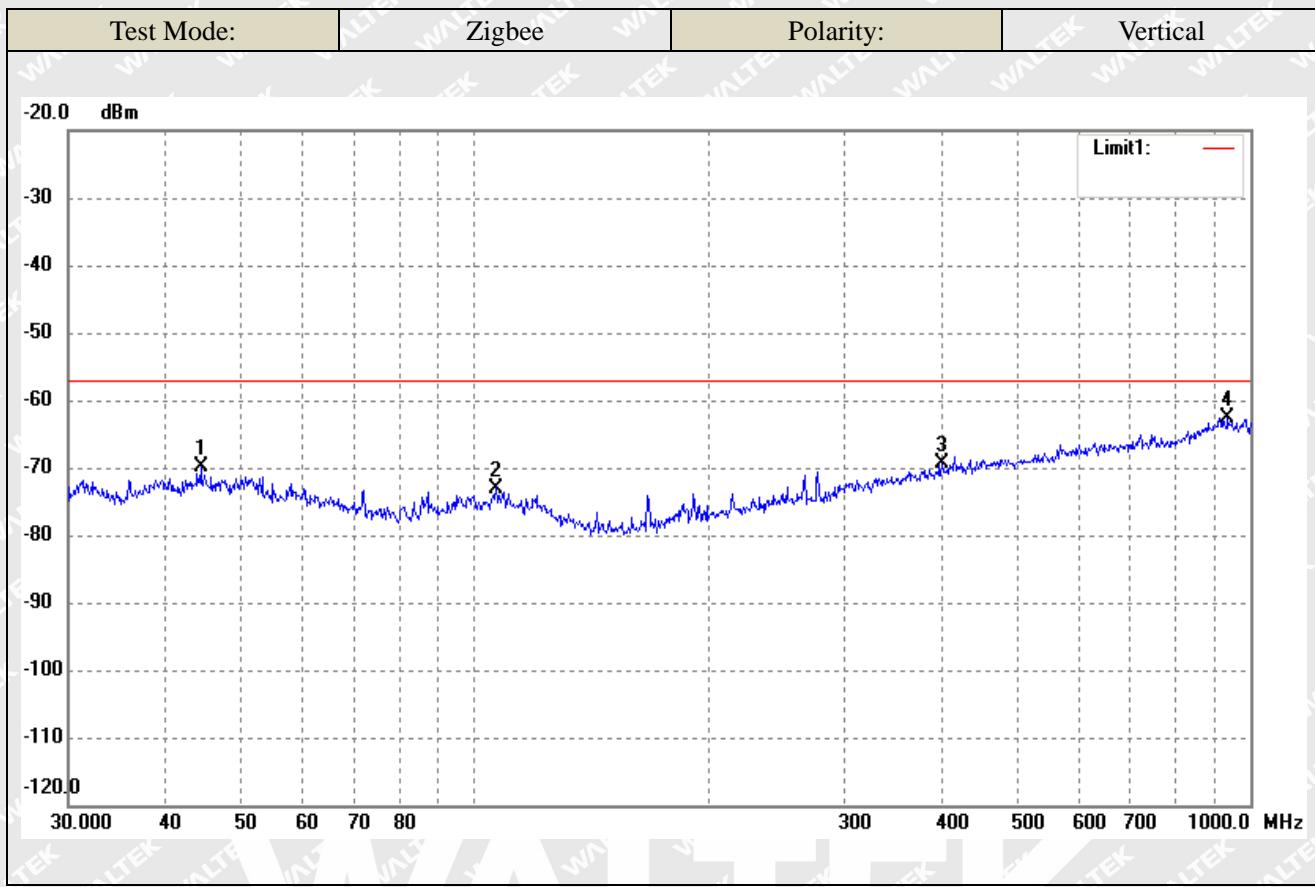


| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 44.4308 | -69.92 | -0.02 | -69.94 | -57.00 | -12.94 | ERP |
| 2 | 106.7587 | -71.48 | -1.52 | -73.00 | -57.00 | -16.00 | ERP |
| 3 | 400.4319 | -74.64 | 5.35 | -69.29 | -57.00 | -12.29 | ERP |
| 4 | 935.5463 | -76.11 | 13.45 | -62.66 | -57.00 | -5.66 | ERP |



➤ Receiver Spurious Emission Above 1GHz
Zigbee Mode

| Frequency (MHz) | Result (dBm) | Limit (dBm) | Margin (dB) | Polar |
|----------------------|-----------------|----------------|----------------|-------|
| 3283.018 | -65.54 | -47.00 | -14.56 | H |
| 5910.798 | -66.10 | -47.00 | -10.49 | H |
| 9322.501 | -66.18 | -47.00 | -6.07 | H |
| 3367.661 | -64.81 | -47.00 | -13.59 | V |
| 6577.753 | -66.29 | -47.00 | -9.77 | V |
| 9393.966 | -67.07 | -47.00 | -6.86 | V |
| High Channel-2480MHz | | | | |
| 3258.042 | -61.38 | -47.00 | -14.38 | H |
| 4736.600 | -58.85 | -47.00 | -11.85 | H |
| 7860.737 | -55.85 | -47.00 | -8.85 | H |
| 3003.173 | -62.30 | -47.00 | -15.30 | V |
| 5352.186 | -58.91 | -47.00 | -11.91 | V |
| 8187.502 | -53.68 | -47.00 | -6.68 | V |

Note: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

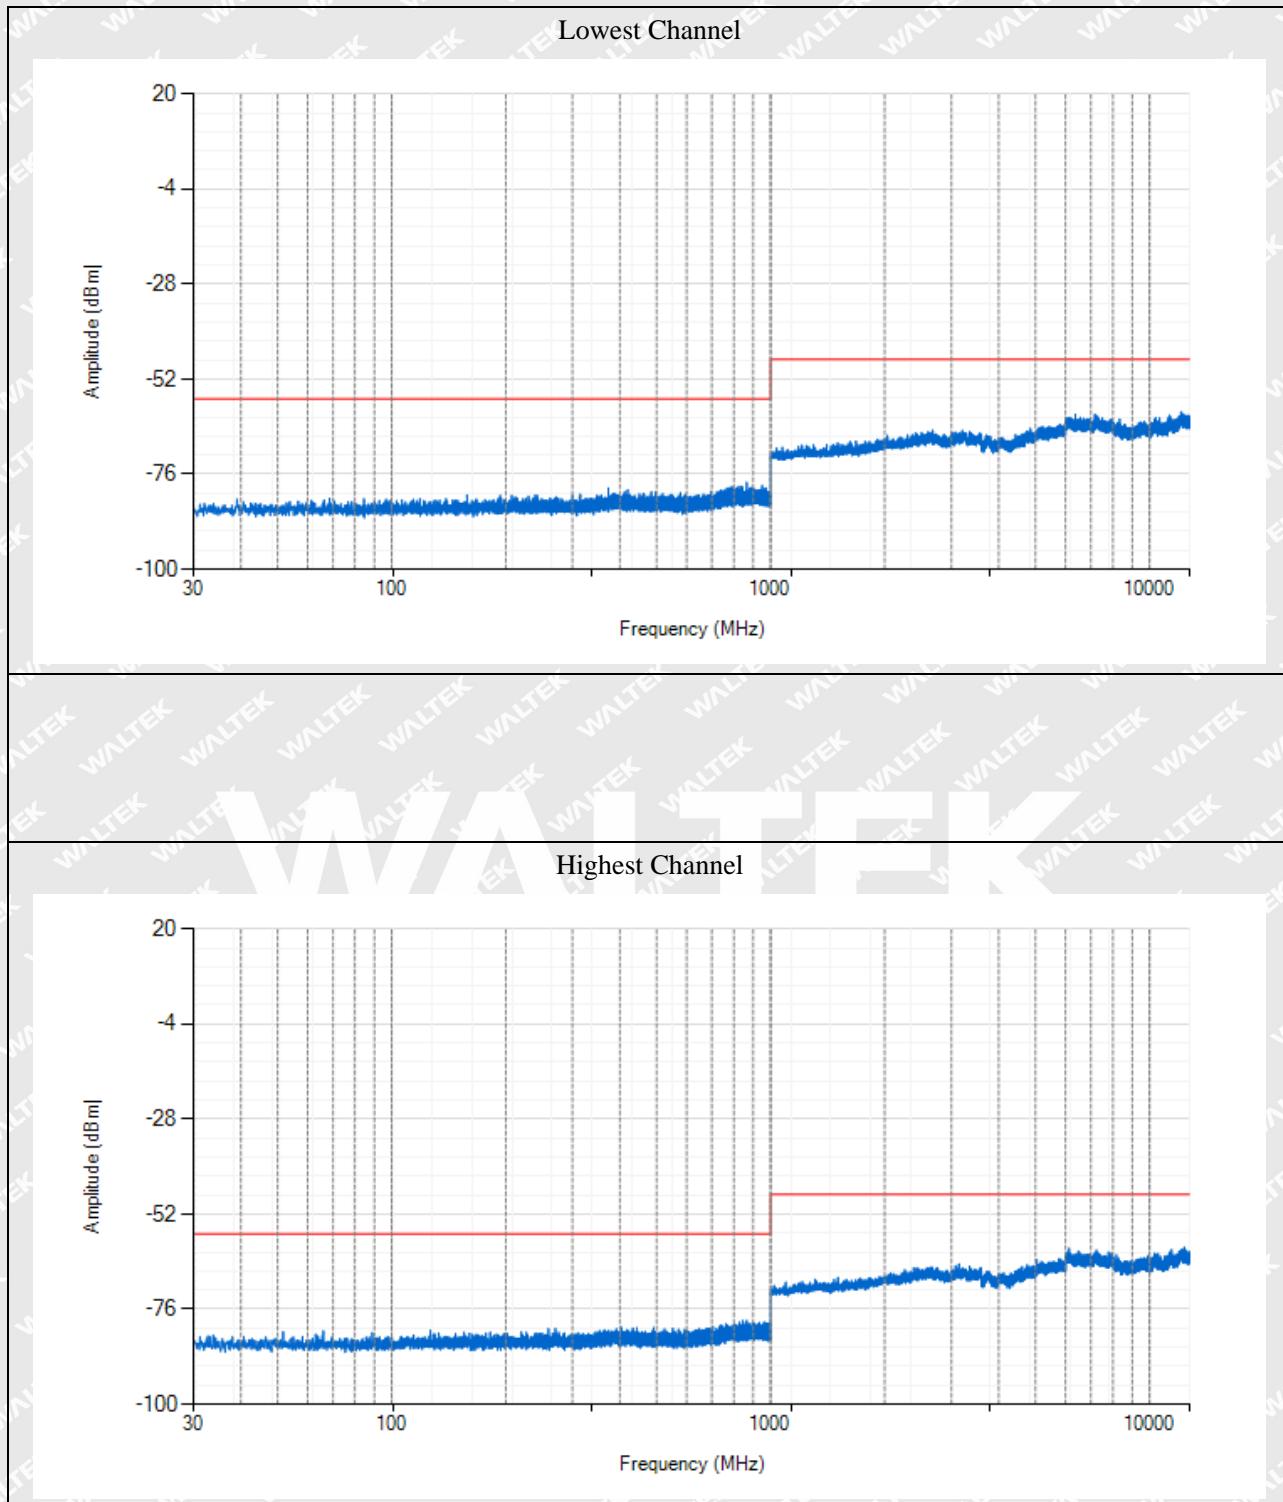**Conducted Receiver Spurious Emission:**

Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which emissions are too small are not list above.



9. Receiver Blocking

9.1 Standard Application

Receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation due to the presence of an unwanted input signal (blocking signal) on frequencies other than those of the operating band and spurious responses.

Performance Criteria

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

Receiver category 1

Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

Receiver category 2

non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power greater than 0 dBm e.i.r.p. and less than or equal to 10 dBm e.i.r.p.

Receiver category 3

non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power of 0 dBm e.i.r.p.



Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

| Wanted signal mean power from companion device (dBm) (see notes 1 and 4) | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 4) | Type of blocking signal |
|--|---|---|--------------------------------|
| (-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2) | 2 380 2 504 | | |
| (-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3) | 2 300 2 330 2 360 2524 2584 2674 | -34 | CW |

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



Table 7: Receiver Blocking parameters receiver category 2 equipment

| Wanted signal mean power from companion device (dBm) (see notes 1 and 3) | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 3) | Type of blocking signal |
|--|--|---|--------------------------------|
| (-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2) | 2 380 2 504 2 300 2 584 | -34 | CW |

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Table 8: Receiver Blocking parameters receiver category 3 equipment

| Wanted signal mean power from companion device (dBm) (see notes 1 and 3) | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 3) | Type of blocking signal |
|--|--|---|--------------------------------|
| (-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2) | 2 380 2 504 2 300 2 584 | -34 | CW |

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

9.2 Test Procedure

- Step 1: • For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.
- Step 2: • The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.
- Step 3: • With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The variable attenuator is set to a value that achieves the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 with a resolution of at least 1 dB. The resulting level for the wanted signal at the input of the UUT is Pmin. This value shall be measured and recorded in the test report.
- The signal level is increased by the value provided in the table corresponding to the receiver category and type of equipment.
- Step 4: • The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.
- Step 5: • Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.
- Step 6: • For non-frequency hopping equipment, repeat step 2 to step 5 with the UUT operating at the highest operating channel.

9.3 Test Setup

According to the section 5.4.11.2.1, the test block diagram shall be used.

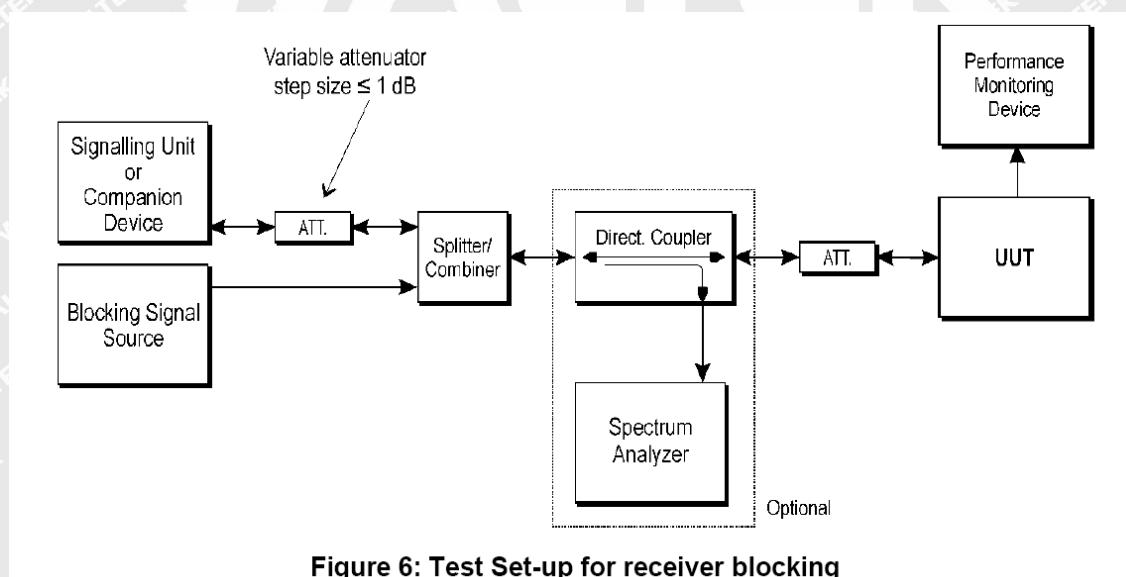


Figure 6: Test Set-up for receiver blocking

All test procedure is carried to the section 5.4.11.2.1

RBW/VBW=8MHz/30MHz



9.4 Summary of Test Results/Plots

The product is receiver category 2

| Mode/ Channel | Wanted signal power (dBm) | Blocking signal Frequency (MHz) | Blocking signal power (dBm) | Test PER(%) | Limit(%) | Result |
|-------------------------|---------------------------------|---------------------------------------|-----------------------------------|-------------|----------|--------|
| Zigbee- Low channel | -66 | 2380 | -34 | 2.48 | <10 | Pass |
| | | 2504 | | | | |
| | | 2300 | | | | |
| | | 2584 | | | | |
| Zigbee- High channel | -66 | 2380 | -34 | 3.09 | <10 | Pass |
| | | 2504 | | | | |
| | | 2300 | | | | |
| | | 2584 | | | | |

*communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. While the Companion device (CMW500) adjust to a level which can obtain the minimum performance criteria PER 10%, This level define to Pmin

Remark: the smallest channel bandwidth shall be used together with the lowest data rate for this channel bandwidth. This mode of operation are aligned with the performance criteria defined in clause 4.3.1.12.3 or clause 4.3.2.11.3 as declared by the manufacturer (see clause 5.4.1.t)).



10. Medium Utilization (MU), Duty Cycle, Tx-sequence, Tx-gap

10.1 Standard Application

This requirement does not apply to adaptive non-FHSS equipment unless operating in a non-adaptive mode.

In addition, this requirement does not apply for non-FHSS equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-FHSS equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

10.2 Limit

The maximum Medium Utilization factor for non-adaptive non-FHSS equipment shall be 10 %.

The Duty Cycle shall be equal to or less than the maximum value declared by the manufacturer.

The Tx-sequence time shall be equal to or less than 10 ms.

The minimum Tx-gap time following a Tx-sequence shall be equal to the duration of that proceeding Txsequence with a minimum of 3,5 ms.

10.3 Test Procedure

The conformance tests for this requirement are defined in EN300 328clause 5.4.2 and specifically in clause 5.4.2.2.1.4.

10.4 Summary of Test Results

| DUT Frequency (MHz) | Duty Cycle (%) | Tx-sequence (ms) | Tx Gap (ms) | Medium Utilisation (%) |
|---------------------|---|------------------|-------------|------------------------|
| 2405 | 33.3 | 7.2 | 14.4 | 3.8 |
| 2440 | 33.3 | 7.2 | 14.4 | 4.0 |
| 2480 | 33.3 | 7.2 | 14.4 | 4.0 |
| Limit | ≤Maximum value declared by the Manufacturer | ≤10 | ≥3.5 | <10 |



EXHIBIT 1 - EUT PHOTOGRAPHS

Please refer to "ANNEX".

WALTEK

EXHIBIT 2 - TEST SETUP PHOTO

| | |
|--|---|
| Spurious Emission Test Setup (Below 1GHz) |  A photograph showing a test setup in an anechoic chamber. A white rectangular device is mounted on a green rectangular base, which sits on a circular metal turntable. The turntable is positioned in front of a large, white, grid-patterned absorber wall. To the right, there is a metal frame structure with several vertical rods. |
| Spurious Emission Test Setup (Above 1GHz) |  A photograph showing a test setup in an anechoic chamber. A white rectangular device is mounted on a green rectangular base, which sits on a circular metal turntable. The turntable is positioned in front of a large, white, grid-patterned absorber wall. In the foreground, there is a blue, spiky absorber mat. To the right, there is a red and black measurement horn antenna mounted on a metal frame. |

***** END OF REPORT *****