



# **RADIO TEST REPORT**

## **ETSI EN 301 893 V2.1.1 (2017-05)**

**Product** : Smart phone

**Trade Mark** : Blackview

**Model Name** : A53 Pro

**Family Model** : N/A

**Report No.** : STR221018001004E

### **Prepared for**

DOKE COMMUNICATION (HK) LIMITED  
RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI  
HK CHINA

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen 518126 P.R. China  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website: <http://www.ntek.org.cn>





**Table of Contents**

**Page**

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST CONDITIONS AND CHANNEL	10
2.3 DESCRIPTION OF TEST CONDITIONS	11
2.4 DESCRIPTION OF SUPPORT UNITS	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . CENTRE FREQUENCIES	14
3.1 APPLIED PROCEDURES / LIMIT	14
3.1.1 LIMIT	14
3.1.2 TEST PROCEDURES	14
3.1.3 TEST MOTHOD	14
3.1.4 TEST SETUP LAYOUT	15
3.1.5 TEST RESULTS	16
4 . NOMINAL CHANNEL BANDWIDTH AND OCCUPIED CHANNEL BANDWIDTH19	
4.1 APPLIED PROCEDURES / LIMIT	19
4.1.1 LIMIT	19
4.1.2 TEST PROCEDURES	19
4.1.3 TEST METHOD	20
4.1.4 TEST SETUP LAYOUT	20
4.1.5 TEST RESULTS	21
5 . RF OUTPUT POWER, TRANSMIT POWER CONTROL (TPC) AND POWER DENSITY	22
5.1 APPLIED PROCEDURES / LIMIT	22
5.2 TEST PROCEDURES	22
5.3 TEST SETUP LAYOUT	22
5.4 TEST RESULTS	23
6 . TRANSMITTER UNWANTED EMISSIONS OUTSIDE THE 5 GHZ RLAN BANDS24	
6.1 APPLIED PROCEDURES / LIMIT	24
6.1.1 CONFORMANCE	24
6.1.2 TEST RESULTS (30MHz ~ 1000MHz)	25
6.1.3 TEST RESULTS (1.0GHz ~26GHz)	26
7 . TRANSMITTER UNWANTED EMISSIONS WITHIN THE 5 GHZ RLAN BANDS27	
7.1 APPLIED PROCEDURES / LIMIT	27
7.1.1 TEST PROCEDURES	27
7.1.2 TEST SETUP LAYOUT	27

**Table of Contents**

**Page**

7.1.3 TEST RESULTS	28
<b>8 . RECEIVER SPURIOUS EMISSIONS</b>	<b>29</b>
8.1 APPLIED PROCEDURES / LIMIT	29
8.1.1 TEST PROCEDURES	29
8.1.2 TEST SETUP LAYOUT	29
8.1.3 TEST RESULTS	30
<b>9 . ADAPTIVITY (CHANNEL ACCESS MECHANISM)</b>	<b>31</b>
9.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT	31
9.2 TEST SETUP CONFIGURATION	32
9.3 LIST OF MEASUREMENTS	32
9.4 TEST RESULTS	32
<b>10 . RECEIVER BLOCKING</b>	<b>33</b>
10.1 LIMITS OF RECEIVER BLOCKING	33
10.2 TEST PROCEDURE	33
10.3 DEVIATION FROM TEST STANDARD	33
10.4 TEST SETUP	33
10.5 TEST RESULTS	34
<b>11 . USER ACCESS RESTRICTIONS</b>	<b>35</b>
11.1 APPLIED PROCEDURES / LIMIT	35
11.2 TEST RESULTS	35
<b>12 . GEO-LOCATION CAPABILITY</b>	<b>35</b>
12.1 APPLIED PROCEDURES / LIMIT	35
12.2 TEST RESULTS	35
<b>13 TEST RESULTS</b>	<b>36</b>
13.1 Occupied Channel Bandwidth	36
13.2 RF Output Power	40
13.3 Power Spectral Density	44
13.4 Transmitter unwanted emissions in the spurious domain	48
13.5 Transmitter unwanted emissions within the 5 GHz RLAN bands	53
13.6 Receiver spurious emissions	60
13.7 Adaptivity	64
13.8 Adaptivity COT Channel Occupancy Time	80
13.9 Adaptivity COT Idle Period Probability	85
<b>14. EUT TEST PHOTO</b>	<b>89</b>
<b>SPURIOUS EMISSIONS MEASUREMENT PHOTOS</b>	<b>89</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

ETSI EN 301 893 V2.1.1			
Clause	Test Item	Applicable	NOTE
4.2.1	Centre Frequencies	Compliance	
4.2.2	Nominal Channel Bandwidth and Occupied Channel Bandwidth	Compliance	
4.2.3	RF output power	Compliance	
4.2.3	Transmit Power Control (TPC)	Not Applicable	
4.2.3	Power Density	Compliance	
4.2.4.1	Transmitter unwanted emissions outside the 5 GHz RLAN bands	Compliance	
4.2.4.2	Transmitter unwanted emissions within the 5 GHz RLAN bands	Compliance	
4.2.5	Receiver spurious emissions	Compliance	
4.2.6	Dynamic Frequency Selection (DFS)	Not Applicable	
4.2.7	Adaptivity (Channel Access Mechanism)	Compliance	
4.2.8	Receiver Blocking	Compliance	
4.2.9	User Access Restrictions	Compliance*	
4.2.10	Geo-location capability	Compliance*	

Note:

1. Compliance\*: Please refer to the product information declared by the manufacturer.
2. The antenna gain provided by customer is used to calculate the EIRP result. NTEK is not responsible for the accuracy of antenna gain parameter.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

FCC Registered No.: 238937 IC Registered No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart phone	
Trade Mark	Blackview	
Model Name.	A53 Pro	
Family Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Smart phone	
	Operation Frequency:	802.11a/ n(20/40)/ac(20/40/80): <input checked="" type="checkbox"/> 5180MHz~5240MHz(20MHz) <input checked="" type="checkbox"/> 5190MHz~5230MHz(40MHz) <input checked="" type="checkbox"/> 5210MHz(80MHz)
	Modulation Type:	802.11a: OFDM (BPSK / QPSK / 16QAM) 802.11n: OFDM (QPSK/BPSK/16QAM/64QAM) 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/256QAM)
	Bit Rate of Transmitter	802.11a: 6/9/12/18/24/36/48/54Mbps; 802.11n (20MHz): up to MCS0-7 802.11n (40MHz): up to MCS0-7 802.11ac (20MHz): up to MCS0-8 802.11ac (40MHz): up to MCS0-9 802.11ac (80MHz): up to MCS0-9
	Number Of Channel	Please see Note 2.
	Antenna Designation:	PIFA Antenna
	Antenna Gain(Peak)	1.0 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Refer to below	
Adapter	Model: QZ-01000EA00 Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A (10.0W)	
Battery	DC 3.87V, 5080mAh, 19.66Wh	
Rating	DC 3.87V from battery or DC 5V from adapter	
Hardware Version	HCT-M659MB-A2	
Software Version	A53Pro_EEA_M659_V1.0	



Note:																																							
1.	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.																																						
2.	<input checked="" type="checkbox"/> <table border="1" style="width: 100%; text-align: center;"> <tr> <td colspan="8">802.11a/n/ac( 20MHz) Carrier Frequency Channel</td> </tr> <tr> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> </tr> <tr> <td>36</td> <td>5180</td> <td>44</td> <td>5220</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>40</td> <td>5200</td> <td>48</td> <td>5240</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>							802.11a/n/ac( 20MHz) Carrier Frequency Channel								Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	36	5180	44	5220	-	-	-	-	40	5200	48	5240	-	-	-	-
802.11a/n/ac( 20MHz) Carrier Frequency Channel																																							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)																																
36	5180	44	5220	-	-	-	-																																
40	5200	48	5240	-	-	-	-																																
	<input checked="" type="checkbox"/> <table border="1" style="width: 100%; text-align: center;"> <tr> <td colspan="8">802.11n/ac(40MHz) Carrier Frequency Channel</td> </tr> <tr> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> <td>Channel</td> <td>Frequen cy (MHz)</td> </tr> <tr> <td>38</td> <td>5190</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>46</td> <td>5230</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>							802.11n/ac(40MHz) Carrier Frequency Channel								Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	38	5190	-	-	-	-	-	-	46	5230	-	-	-	-	-	-
802.11n/ac(40MHz) Carrier Frequency Channel																																							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)																																
38	5190	-	-	-	-	-	-																																
46	5230	-	-	-	-	-	-																																
	<input checked="" type="checkbox"/> <table border="1" style="width: 100%; text-align: center;"> <tr> <td colspan="2">802.11ac (80MHz) Carrier Frequency Channel</td> </tr> <tr> <td>Channel</td> <td>Frequency (MHz)</td> </tr> <tr> <td>42</td> <td>5210</td> </tr> </table>							802.11ac (80MHz) Carrier Frequency Channel		Channel	Frequency (MHz)	42	5210																										
802.11ac (80MHz) Carrier Frequency Channel																																							
Channel	Frequency (MHz)																																						
42	5210																																						

## 2.2 TEST CONDITIONS AND CHANNEL

### Test conditions:

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	40°C ~ -10°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 3.87V	/

Note:

(1) The HT 40°C and LT -10°C was declared by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.

### Test channels:

Please refer to the table below:

Test	Clause	Test channels		
		Lower sub-band (5 150 MHz to 5 350 MHz)		Higher sub-band 5 470 MHz to 5 725 MHz
		5 150 MHz to 5 250 MHz	5 250 MHz to 5 350 MHz	
Centre frequencies	5.4.2	C7 (see note 1)		C8 (see note 1)
Occupied Channel Bandwidth	5.4.3	C7		C8
Power/ Power Density	5.4.4	C1	C2	C3, C4
Transmitter unwanted emissions outside the 5 GHz RLAN bands	5.4.5	C7 (see note 1)		C8 (see note 1)
Transmitter unwanted emissions within the 5 GHz RLAN bands	5.4.6	C1	C2	C3, C4
Receiver spurious emissions	5.4.7	C7 (see note 1)		C8 (see note 1)
Transmit Power Control (TPC)	5.4.4	n.a. (see note 2)	C2 (see note 1)	C3, C4 (see note 1)
Dynamic Frequency Selection (DFS)	5.4.8	n.a. (see note 2)	C5	C6 (see note 3)
Adaptivity	5.4.9	C9		
Receiver Blocking	5.4.10	C7		C8

**C1, C3:** The lowest declared channel for every declared Nominal Channel Bandwidth within this band. For the Power Density testing, it is sufficient to only perform this test using the lowest Nominal Channel Bandwidth.

**C2, C4:** The highest declared channel for every declared Nominal Channel Bandwidth within this band. For the Power Density testing, it is sufficient to only perform this test using the lowest Nominal Channel Bandwidth.

**C5, C6:** One channel out of the declared channels for this frequency range. If more than one Nominal Channel Bandwidth has been declared for this sub-band, testing shall be performed using the lowest and highest Nominal Channel Bandwidth.

**C7, C8:** One channel out of the declared channels for this sub-band. For Occupied Channel Bandwidth, testing shall be repeated for every declared Nominal Channel Bandwidth within this sub-band.

**C9:** One channel (in case of single-channel testing) or a group of channels (in case of multi-channel testing) out of the declared channels.

**NOTE 1:** In case of more than one channel plan has been declared, testing of these specific requirements need only be performed using one of the declared channel plans.

**NOTE 2:** Testing is not required for Nominal Channel Bandwidths that fall completely within the frequency range 5 150 MHz to 5 250 MHz.

**NOTE 3:** Where the declared channel plan includes channels whose Nominal Channel Bandwidth falls completely or partly within the 5 600 MHz to 5 650 MHz band, the tests for the Channel Availability Check (and where implemented, for the Off-Channel CAC) shall be performed on one of these channels in addition to a channel within the band 5 470 MHz to 5 600 MHz or within the band 5 650 MHz to 5 725 MHz.

**NOTE 4:** For Receiver Blocking, just test the channel of smallest channel bandwidth and the lowest data rate.

2.3 DESCRIPTION OF TEST CONDITIONS

E-1  
EUT

**2.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Smart phone	A53 Pro	N/A	EUT

Item	Type	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2022.04.06	2023.04.05	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31	2023.03.30	1 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.04.01	2023.03.31	1 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
Pre-Amplifier	EMC	EMC051835SE	980246	2022.06.17	2023.06.16	1 year
Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.01	2023.03.31	1 year
Filter	TRILTHIC	2400MHz	29	2020.04.07	2023.04.06	3 year
Attenuator	Weinschel	33-10-33	AR4010	2020.04.07	2023.04.06	3 year
Attenuator	Weinschel	24-20-34	BP4485	2020.04.07	2023.04.06	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022.06.17	2023.06.16	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2022.04.01	2023.03.31	1 year
Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S+	SF025101428	2020.04.07	2023.04.06	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2020.04.07	2023.04.06	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2020.07.17	2023.07.16	3 year
Attenuator	Agilent	8495B	MY42147029	2020.04.13	2023.04.12	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2022.06.17	2023.06.16	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2022.06.16	2023.06.15	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2022.06.16	2023.06.15	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

### 3. CENTRE FREQUENCIES

#### 3.1 APPLIED PROCEDURES / LIMIT

##### 3.1.1 LIMIT

The actual centre frequency for any given channel declared by the manufacturer shall be maintained within the range  $f_c \pm 20$  ppm.

##### 3.1.2 TEST PROCEDURES

###### **Test conditions**

These measurements shall be performed under both normal and extreme test conditions (see clause 5.1.1).

The channels on which the conformance requirements in clause 4.2 shall be verified are defined in clause 5.1.3.

The UUT shall be configured to operate at a normal RF Output Power level. In addition, the UUT shall be configured to operate on a single channel.

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector(s) provided, conducted measurements shall be used.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) the measurements shall be performed on only one of the active transmit chains.

For a UUT with integral antenna(s) and without a temporary antenna connector(s), radiated measurements shall be used.

##### 3.1.3 TEST METHOD

###### **Conducted measurement:**

###### 1. Equipment operating without modulation

This test method requires that the UUT can be operated in an unmodulated test mode.

The UUT shall be connected to a frequency counter and operated in an unmodulated mode. The result shall be recorded.

###### 2. Equipment operating with modulation

This method is an alternative to the above method in case the UUT cannot be operated in an un-modulated mode.

The UUT shall be connected to spectrum analyser.

The settings of the spectrum analyser shall be adjusted to optimize the instruments frequency accuracy.

Max Hold shall be selected and the centre frequency adjusted to that of the UUT.

The peak value of the power envelope shall be measured and noted. The span shall be reduced and the marker moved in a positive frequency increment until the upper, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f1.

The marker shall then be moved in a negative frequency increment until the lower, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f2.


The centre frequency is calculated as  $(f1 + f2) / 2$ .

###### **Radiated measurement:**

The test set up as described in annex B (ETSI EN 301 893 V2.1.1) shall be used with a spectrum analyser of sufficient accuracy attached to the test antenna.

The test procedure is as described under conducted measurement.

### 3.1.4 TEST SETUP LAYOUT

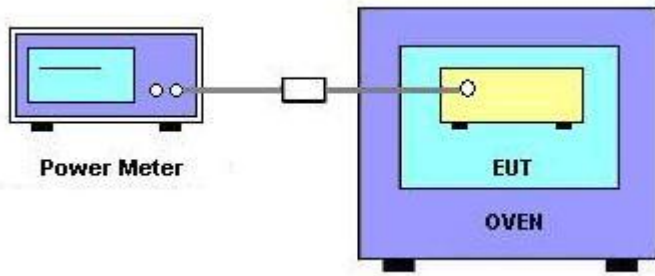

### 3.1.5 TEST RESULTS

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	20 °C	Relative Humidity	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.87V
Test Mode :	Tx Mode-802.11(a/n20/n40/ac20/ac40/ac80)		

#### 802.11a

TEST CONDITIONS				Reference Frequency: 5180MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5171.829	5188.155	5179.992	-1.54
T min (°C)	-10	V nom (V)		5171.832	5188.156	5179.994	-1.16
T max (°C)	40	V nom (V)		5171.828	5188.157	5179.993	-1.45
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			

#### 802.11n20

TEST CONDITIONS				Reference Frequency: 5180MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5171.221	5188.751	5179.986	-2.70
T min (°C)	-10	V nom (V)		5171.223	5188.752	5179.988	-2.41
T max (°C)	40	V nom (V)		5171.219	5188.754	5179.987	-2.61
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			



802.11n40

TEST CONDITIONS				Reference Frequency: 5190MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5172.050	5207.902	5189.976	-4.62
T min (°C)	-10	V nom (V)		5172.053	5207.903	5189.978	-4.24
T max (°C)	40	V nom (V)		5172.044	5207.904	5189.974	-5.01
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			

802.11ac20

TEST CONDITIONS				Reference Frequency: 5180MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5171.217	5188.751	5179.984	-3.09
T min (°C)	-10	V nom (V)		5171.219	5188.752	5179.986	-2.80
T max (°C)	40	V nom (V)		5171.215	5188.754	5179.985	-2.99
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			

802.11ac40

TEST CONDITIONS				Reference Frequency: 5190MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5172.034	5207.902	5189.968	-6.17
T min (°C)	-10	V nom (V)		5172.036	5207.904	5189.970	-5.78
T max (°C)	40	V nom (V)		5172.032	5207.904	5189.968	-6.17
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			

802.11ac80

TEST CONDITIONS				Reference Frequency: 5210MHz			
				fL	fH	(fL+fH)/2	Frequency Deviation (ppm)
T nom (°C)	20	V nom (V)	3.87	5172.292	5247.596	5209.944	-10.75
T min (°C)	-10	V nom (V)		5172.298	5247.598	5209.948	-9.98
T max (°C)	40	V nom (V)		5172.291	5247.597	5209.944	-10.75
Limits				± 20 ppm			
<b>Result</b>				<b>Complies</b>			

## 4. NOMINAL CHANNEL BANDWIDTH AND OCCUPIED CHANNEL BANDWIDTH

### 4.1 APPLIED PROCEDURES / LIMIT

#### 4.1.1 LIMIT

The Nominal Channel Bandwidth shall be at least 5 MHz at all times.

The Occupied Channel Bandwidth shall be between 80 % and 100 % of the declared Nominal Channel Bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement.

NOTE: During an established communication, a device is allowed to operate temporarily in a mode where its Occupied Channel Bandwidth may be reduced to as low as 40 % of its Nominal Channel Bandwidth with a minimum of 4 MHz.

#### 4.1.2 TEST PROCEDURES

##### **Test conditions**

The conformance requirements shall be verified only under normal operating conditions, and on those channels and channel bandwidths defined in clause 5.1.3(ETSI EN 301 893 V2.1.1).

The measurements shall be performed using normal operation of the equipment with the test signal applied.

The UUT shall be configured to operate at a typical RF power output level.

When equipment has simultaneous transmissions in adjacent channels, these transmissions may be considered as one signal with an actual Nominal Channel Bandwidth of 'n' times the individual Nominal Channel Bandwidth where 'n' is the number of adjacent channels. When equipment has simultaneous transmissions in non-adjacent channels, each power envelope shall be considered separately.

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector(s) provided, conducted measurements shall be used.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs).

For a UUT with integral antenna(s) and without a temporary antenna connector(s), radiated measurements shall be used.

#### 4.1.3 TEST METHOD

##### Conducted measurement

The measurement procedure shall be as follows:

##### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: 100 kHz
- Video BW: 300 kHz
- Frequency Span: 2 x Nominal Bandwidth (e.g. 40 MHz for a 20 MHz channel)
- > 1 s; for larger Nominal Bandwidths, the sweep time may be increased until a value where the sweep time has no impact on the RMS value of the signal
- Detector Mode: RMS
- Trace Mode: Max Hold

##### Step 2:

Wait for the trace to stabilize.

##### Step 3:


- Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.
- Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

The measurement described in step 1 to step 3 above shall be repeated in case of simultaneous transmissions in non-adjacent channels.

##### Radiated measurement

The test set up as described in annex B (ETSI EN 301 893 V2.1.1) and the applicable measurement procedures described in annex C (ETSI EN 301 893 V2.1.1) shall be used. The test procedure is as described under conducted measurement.

#### 4.1.4 TEST SETUP LAYOUT

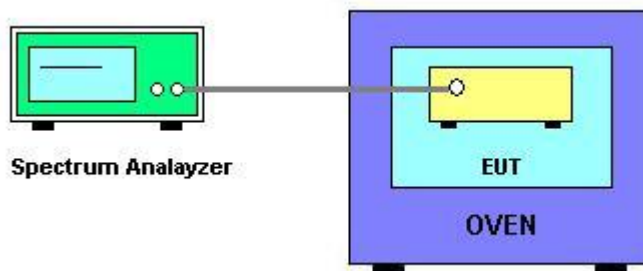

**4.1.5 TEST RESULTS**

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity:	54 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V
Test Mode :	TX Mode-802.11(a/n20/n40/ac20/ac40/ac80)		

Test data reference attachment

5. RF OUTPUT POWER, TRANSMIT POWER CONTROL (TPC) AND POWER DENSITY

5.1 APPLIED PROCEDURES / LIMIT

TPC is not required for channels whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz.

For devices with TPC, the RF output power and the power density when configured to operate at the highest stated power level of the TPC range shall not exceed the levels given in table 2.

Devices are allowed to operate without TPC. See table 2 for the applicable limits in this case.

**Table 2: Mean e.i.r.p. limits for RF output power and power density at the highest power level**

Frequency range [MHz]	Mean e.i.r.p. limit [dBm]		Mean e.i.r.p. density limit [dBm/MHz]	
	with TPC	without TPC	with TPC	without TPC
5 150 to 5 350	23	20/23 (see note 1)	10	7/10 (see note 2)
5 470 to 5 725	30 (see note 3)	27 (see note 3)	17 (see note 3)	14 (see note 3)

NOTE 1: The applicable limit is 20 dBm, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 23 dBm.

NOTE 2: The applicable limit is 7 dBm/MHz, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 10 dBm/MHz.

NOTE 3: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

For devices using TPC, the RF output power during a transmission burst when configured to operate at the lowest stated power level of the TPC range shall not exceed the levels given in table 3. For devices without TPC, the limits in table 3 do not apply.

**Table 3: Mean e.i.r.p. limits for RF output power at the lowest power level of the TPC range**


Frequency range	Mean e.i.r.p. [dBm]
5 250 MHz to 5 350 MHz	17
5 470 MHz to 5 725 MHz	24 (see note)

NOTE: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

5.2 TEST PROCEDURES

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.4

5.3 TEST SETUP LAYOUT

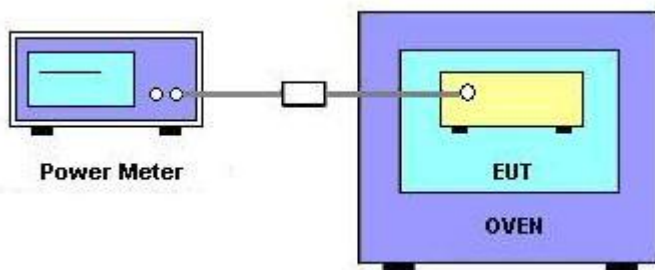

5.4 TEST RESULTS

RF Output Power

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity:	54 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V
Test Mode :	Tx Mode-802.11(a/n20/n40/ac20/ac40/ac80)		

Test data reference attachment

Power density

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity:	54 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V
Test Mode :	Tx Mode-802.11(a/n20/n40/ac20/ac40/ac80)		

Test data reference attachment

**6. TRANSMITTER UNWANTED EMISSIONS OUTSIDE THE 5 GHZ RLAN BANDS**

**6.1 APPLIED PROCEDURES / LIMIT**

The level of transmitter unwanted emissions outside the 5 GHz RLAN bands shall not exceed the limits given in table 4.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment

**Table 4: Transmitter unwanted emission limits outside the 5 GHz RLAN bands**

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 5,15 GHz	-30 dBm	1 MHz
5,35 GHz to 5,47 GHz	-30 dBm	1 MHz
5,725 GHz to 26 GHz	-30 dBm	1 MHz

**6.1.1 CONFORMANCE**

Conformance tests as defined in clause 5.4.5 shall be carried out.



6.1.2 TEST RESULTS (30MHz ~ 1000MHz)

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24 °C	Relative Humidity :	57%
Pressure :	1010 hPa	Test Power :	DC 3.87V
Test Mode :	TX-802.11n20		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	43.48	-74.88	14.91	-59.97	-54	-5.97	peak
V	97.20	-81.50	15.76	-65.74	-36	-29.74	peak
V	181.27	-79.32	15.26	-64.06	-54	-10.06	peak
V	231.17	-81.21	16.03	-65.18	-36	-29.18	peak
V	587.72	-74.56	14.90	-59.66	-36	-23.66	peak
V	718.56	-77.24	16.11	-61.13	-54	-7.13	peak
H	42.49	-74.23	15.71	-58.52	-54	-4.52	peak
H	102.67	-72.08	14.42	-57.66	-54	-3.66	peak
H	216.94	-74.37	15.51	-58.86	-54	-4.86	peak
H	277.97	-81.41	16.08	-65.33	-36	-29.33	peak
H	498.40	-77.69	14.30	-63.39	-36	-27.39	peak
H	716.47	-76.13	14.28	-61.85	-54	-7.85	peak

**Remark:**

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

Note: "802.11n20" is the worst mode, the test report records only the worst-case test values.

6.1.3 TEST RESULTS (1.0GHz ~26GHz)


EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 3.87V
Test Mode :	TX-802.11n20 (CH36/CH40/CH48)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
<b>operation frequency:5180</b>							
V	10360	-59.23	13.82	-45.41	-30	-15.41	peak
V	15540	-60.76	14.91	-45.85	-30	-15.85	peak
H	10360	-63.80	13.82	-49.98	-30	-19.98	peak
H	15540	-61.31	14.91	-46.40	-30	-16.40	peak
<b>operation frequency:5200</b>							
V	10400	-57.78	13	-44.78	-30	-14.78	peak
V	15600	-63.38	14.95	-48.43	-30	-18.43	peak
H	10400	-61.44	13	-48.44	-30	-18.44	peak
H	15600	-57.50	14.95	-42.55	-30	-12.55	peak
<b>operation frequency:5240</b>							
V	10480	-60.54	13.81	-46.73	-30	-16.73	peak
V	15720	-57.19	15.29	-41.90	-30	-11.90	peak
H	10480	-67.81	13.81	-54.00	-30	-24.00	peak
H	15720	-56.62	15.29	-41.33	-30	-11.33	peak
<b>Remark:</b>							
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit							

Note: "802.11n20" is the worst mode, the test report records only the worst-case test values.

## 7. TRANSMITTER UNWANTED EMISSIONS WITHIN THE 5 GHZ RLAN BANDS

### 7.1 APPLIED PROCEDURES / LIMIT

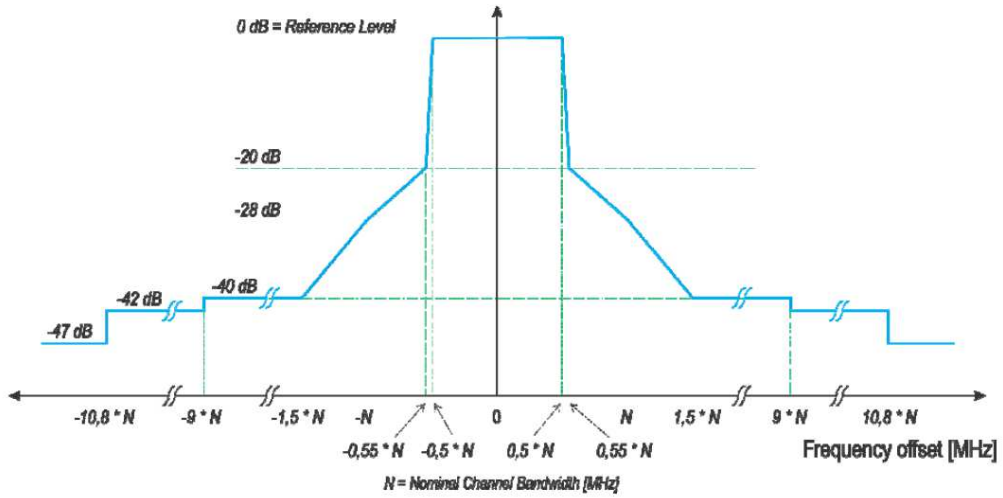


NOTE: dBc is the spectral density relative to the maximum spectral power density of the transmitted signal.

Figure 1: Transmit spectral power mask

#### 7.1.1 TEST PROCEDURES

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.6

#### 7.1.2 TEST SETUP LAYOUT

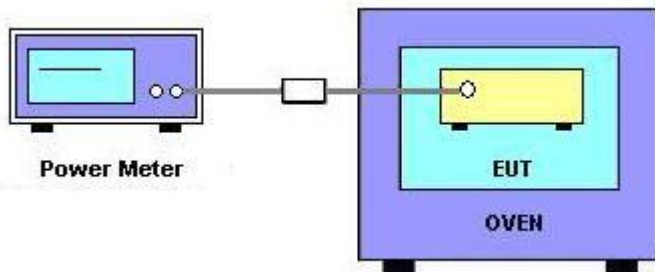

7.1.3 TEST RESULTS

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity:	54 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V(NORMAL)
Test Mode :	Tx Mode-802.11(a/n20/n40/ac20/ac40/ac80)		

Test data reference attachment

**8. RECEIVER SPURIOUS EMISSIONS**

**8.1 APPLIED PROCEDURES / LIMIT**

The spurious emissions of the receiver shall not exceed the limits given in table 5. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment.

**Table 5: Spurious radiated emission limits**

Frequency range	Maximum power	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 26 GHz	-47 dBm	1 MHz

**8.1.1 TEST PROCEDURES**

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.7

**8.1.2 TEST SETUP LAYOUT**

This test setup layout is the same as that shown in section 6.1.4

### 8.1.3 TEST RESULTS

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Power :	DC 3.87V
Test Mode :	RX-802.11n20		

#### BELOW 1G

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	37.75	-81.18	12.67	-68.51	-57	-11.51	peak
V	106.33	-86.93	13.66	-73.27	-57	-16.27	peak
V	182.14	-82.83	14.59	-68.24	-57	-11.24	peak
V	417.75	-84.57	15.26	-69.31	-57	-12.31	peak
V	568.56	-85.94	18.83	-67.11	-57	-10.11	peak
V	726.27	-84.87	19.92	-64.95	-57	-7.95	peak
H	42.64	-81.65	11.63	-70.02	-57	-13.02	peak
H	103.22	-84.56	18.96	-65.60	-57	-8.60	peak
H	196.28	-85.33	19.81	-65.52	-57	-8.52	peak
H	380.09	-82.17	18.02	-64.15	-57	-7.15	peak
H	601.77	-87.85	19.13	-68.72	-57	-11.72	peak
H	746.51	-87.76	13.01	-74.75	-57	-17.75	peak

**Remark:**

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

#### ABOVE 1G

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	2764.34	-80.74	14.92	-65.82	-47	-18.82	peak
V	3803.97	-77.52	14.56	-62.96	-47	-15.96	peak
V	4168.62	-82.83	15.95	-66.88	-47	-19.88	peak
V	4801.09	-78.69	17.15	-61.54	-47	-14.54	peak
V	5506.26	-80.14	13.73	-66.41	-47	-19.41	peak
V	6015.44	-81.74	20.42	-61.32	-47	-14.32	peak
H	2414.72	-80.14	14.11	-66.03	-47	-19.03	peak
H	3058.93	-81.49	15.29	-66.20	-47	-19.20	peak
H	4459.80	-84.04	15.89	-68.15	-47	-21.15	peak
H	4647.10	-84.16	16.70	-67.46	-47	-20.46	peak
H	5461.99	-84.88	17.95	-66.93	-47	-19.93	peak
H	5538.85	-83.35	18.58	-64.77	-47	-17.77	peak

**Remark:**

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

Note: "802.11n20" is the worst mode, the test report records only the worst-case test values.

## 9. ADAPTIVITY (CHANNEL ACCESS MECHANISM)

### 9.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT

This requirement applies to equipment, testing shall be performed using the highest nominal channel Bandwidth. The manufacturer shall state whether the UUT is capable of operating as a Frame Based Equipment or Load Based Equipment. See tables for the applicability of adaptive requirements and limit for each of the operational modes.

#### **Applicability of adaptive requirements and limit**

Requirement	Operational Mode		
	Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
Minimum Clear Channel Assessment (CCA) Time	20 us (see note 1)	(see note 2)	20 us (see note 1)
Maximum Channel Occupancy (COT) Time	1ms to 10 ms	(see note 2)	(13/32)*q ms (see note 3)
Minimum Idle Period	5% of COT	(see note 2)	NA
Extended CCA check	NA	(see note 2)	N*CCA (see note 4)
Short Control Signalling Transmissions	Maximum duty cycle of 5% within an observation period of 50 ms (see note 5)		

Note 1: The CCA time used by the equipment shall be declared by the manufacturer.  
 Note 2: LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using 'energy detect', as described in IEEE 802.11™-2007[9], clauses 15 and 17, in IEEE 802.11n™ -2009[10], clauses 20.  
 Note 3: q is selected by the manufacturer in the range [4...32]  
 Note 4: The value of N shall be randomly selected in the range [1...q]  
 Note 5: Adaptive equipment may or may not have Short Control Signaling Transmissions.

#### **Interference threshold level**

Maximum transmit power (P <sub>H</sub> ) EIRP dBm	Threshold Level (TL) (see note 1 and 2)
9.81	-73 dBm / MHz

Note 1: TL = -73 dBm / MHz + (23 -PH)/ (1 MHz) (assuming a 0 dBi receive antenna and PH specified in dBm e.i.r.p )  
 Note 2: Transmitter the CCA threshold level (TL) shall be equal or lower than -73 dBm / MHz at the input to the receiver (assuming a 0 dBi receive antenna).

#### TEST PROCEDURE

Reference to ETSI EN 301 893 V2.1.1 (2017-05) clause 5.4.9

9.2 TEST SETUP CONFIGURATION

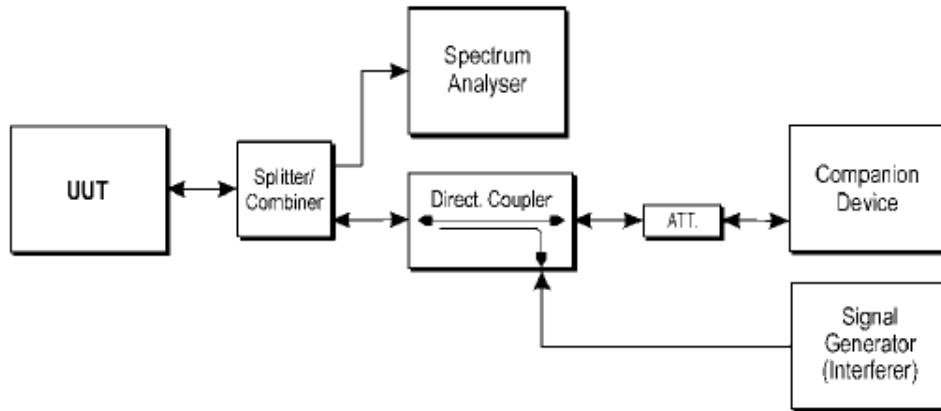


Figure 13: Example Test Set-up for verifying the adaptivity of an equipment

9.3 LIST OF MEASUREMENTS

UUT operational Mode		
Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
	V	

Clause	Test Parameter	Remarks	PASS/FAIL
4.9.2.1	Adaptive (Frame Based Equipment)	Not Applicable	N/A
4.9.2.2	Adaptive (Load Based Equipment)	Applicable	PASS
4.9.2.3	Short Control Signaling Transmissions	Applicable	PASS

9.4 TEST RESULTS

EUT :	Smart phone	Model Name :	A53 Pro
Temperature :	24°C	Relative Humidity :	54 %
Pressure :	1012 hPa	Test Power :	DC 3.87V
TEST RESULTS	Pass		

Test data reference attachment



10. RECEIVER BLOCKING

10.1 LIMITS OF RECEIVER BLOCKING

**Performance Criteria**

The minimum performance criterion shall be a PER of less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1, item s)).

While maintaining the minimum performance criteria as defined in clause 4.2.8.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined in table 7.

**Table 9: Receiver Blocking parameters**

Wanted signal mean power from companion device (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
P <sub>min</sub> + 6 dB	5 100	-59	CW
P <sub>min</sub> + 6 dB	4 900 5 000 5 975	-53	CW

NOTE 1: P<sub>min</sub> is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined clause 4.2.8.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the same levels should be used at the antenna connector irrespective of antenna gain.

10.2 TEST PROCEDURE

Refer to chapter 5.4.10 of ETSI EN 301 893 V2.1.1 (2017-05)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

10.3 DEVIATION FROM TEST STANDARD

No deviation

10.4 TEST SETUP

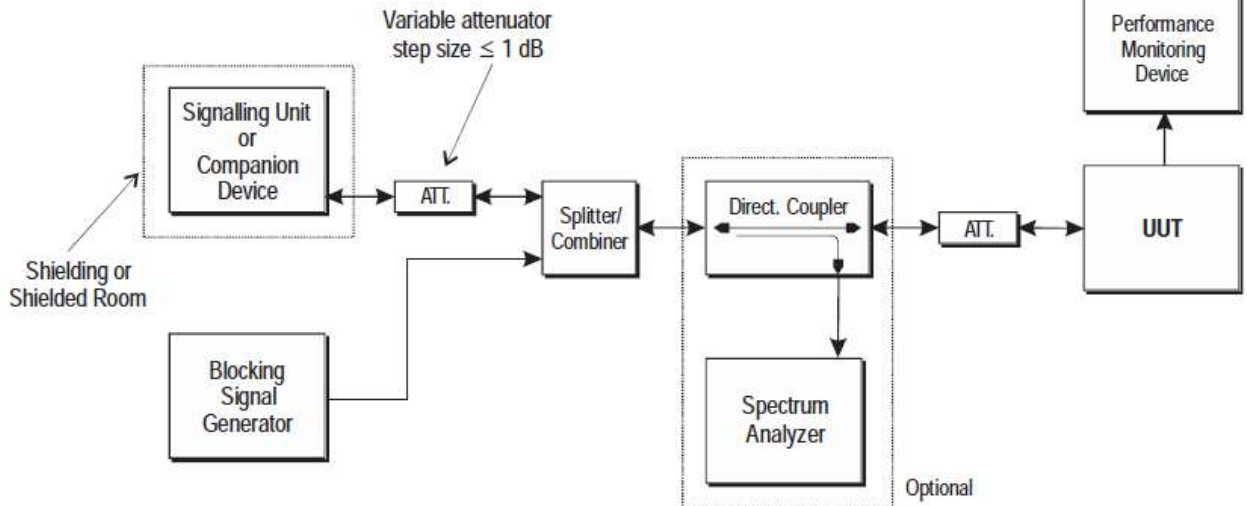


Figure 14: Test Set-up for receiver blocking

10.5 TEST RESULTS

EUT :	Smart phone	Model Number :	A53 Pro
Temperature :	24°C	Relative Humidity :	54 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V
Test Mode :	RX 802.11a		

CH 36-5180MHz

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(1)</small>	PER Limit %
-72 + 6 dB	5100	-59	0.53	≤10%
-72 + 6 dB	4900	-53	0.32	≤10%
	5000		0.47	
	5975		0.42	

CH 48-5240MHz

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(1)</small>	PER Limit %
-72 + 6 dB	5100	-59	0.26	≤10%
-72 + 6 dB	4900	-53	0.82	≤10%
	5000		0.74	
	5975		0.49	

Note: (1) The above results were obtained from laboratory tests.

## 11. USER ACCESS RESTRICTIONS

### 11.1 APPLIED PROCEDURES / LIMIT

The equipment shall be so constructed that settings (hardware and/or software) related to DFS shall not be accessible to the user if changing those settings result in the equipment no longer being compliant with the DFS requirements in clause 4.2.6.

The above requirement includes the prevention of indirect access to any setting that impacts DFS. The following is a non-exhaustive list of examples of such indirect access.

### 11.2 TEST RESULTS

The EUT is accord with User Access Restrictions

## 12. GEO-LOCATION CAPABILITY

### 12.1 APPLIED PROCEDURES / LIMIT

The geographic location determined by the equipment as defined in clause 4.2.10.2 shall not be accessible to the user.

If the equipment cannot determine the geographic location, it shall operate in a mode compliant with the requirements applicable in any of the geographic locations where the equipment is intended to operate.

### 12.2 TEST RESULTS



The EUT is accord with Geo-location capability



### 13 TEST RESULTS

#### 13.1 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Verdict
NVNT	a	5180	Ant1	5179.992	16.326	Pass
NVNT	n20	5180	Ant1	5179.986	17.53	Pass
NVNT	n40	5190	Ant1	5189.968	35.868	Pass
NVNT	ac20	5180	Ant1	5179.984	17.534	Pass
NVNT	ac40	5190	Ant1	5189.996	35.86	Pass
NVNT	ac80	5210	Ant1	5209.944	75.304	Pass



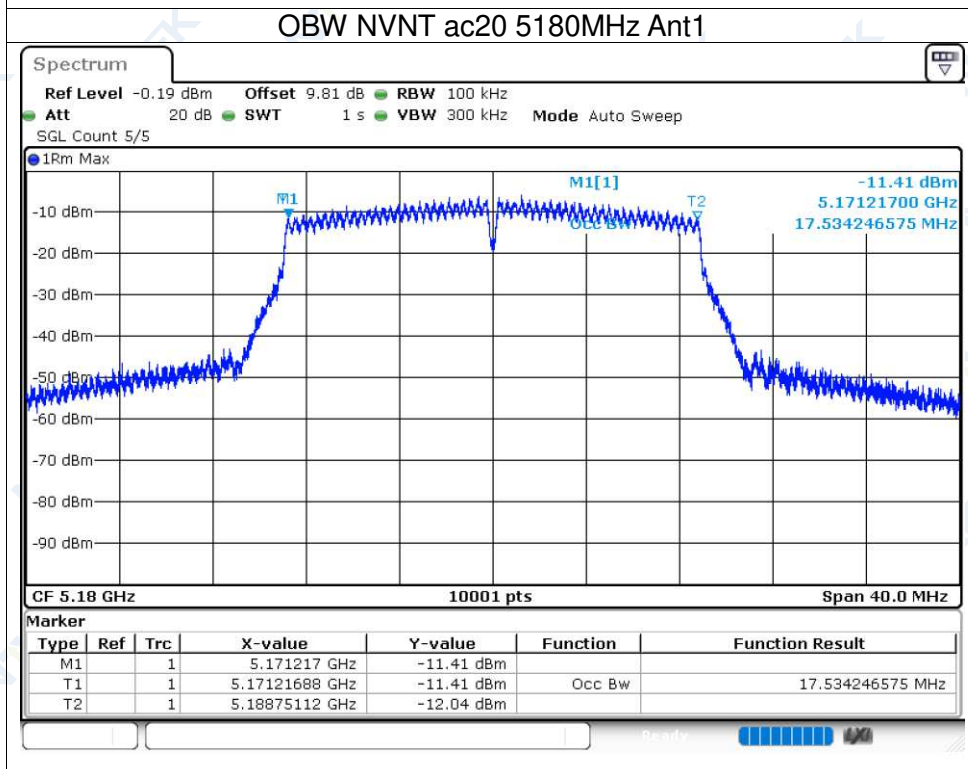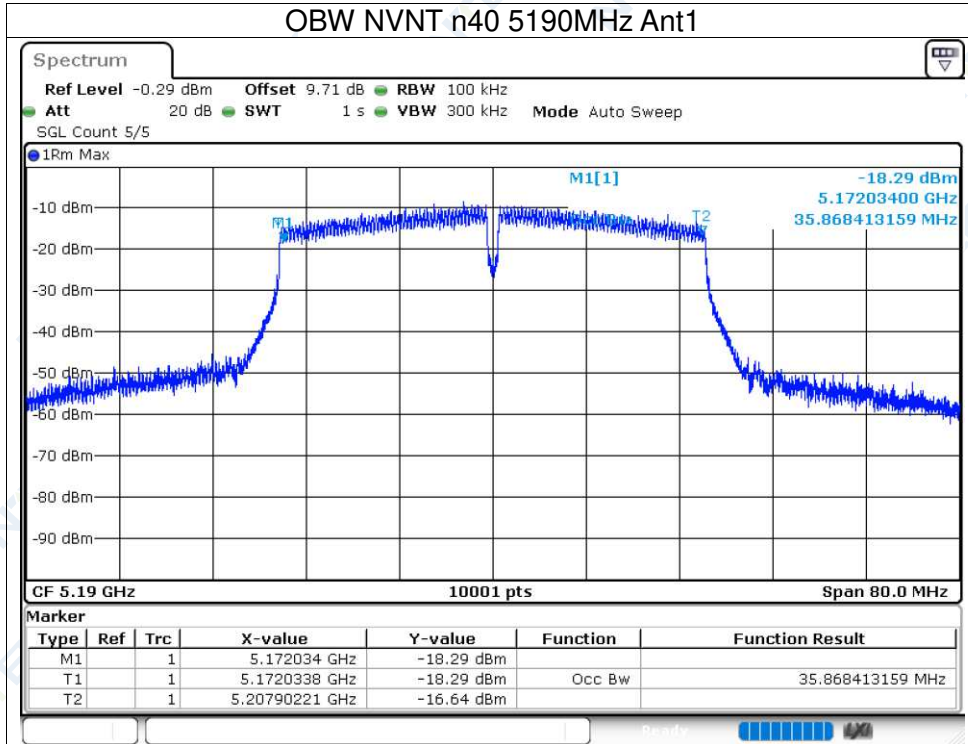

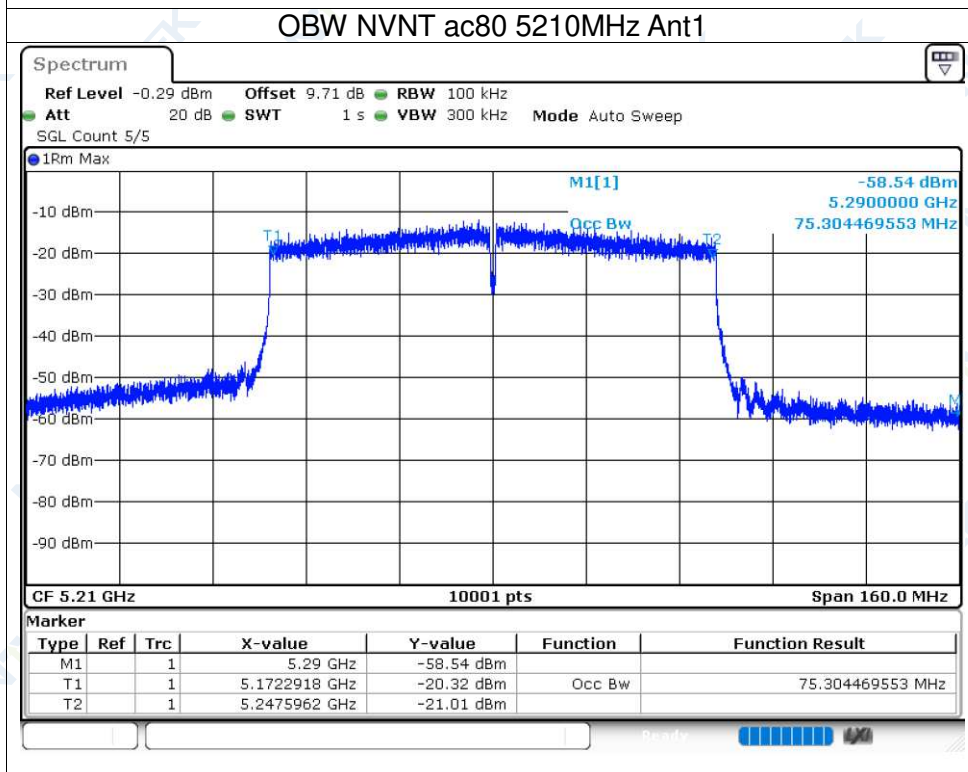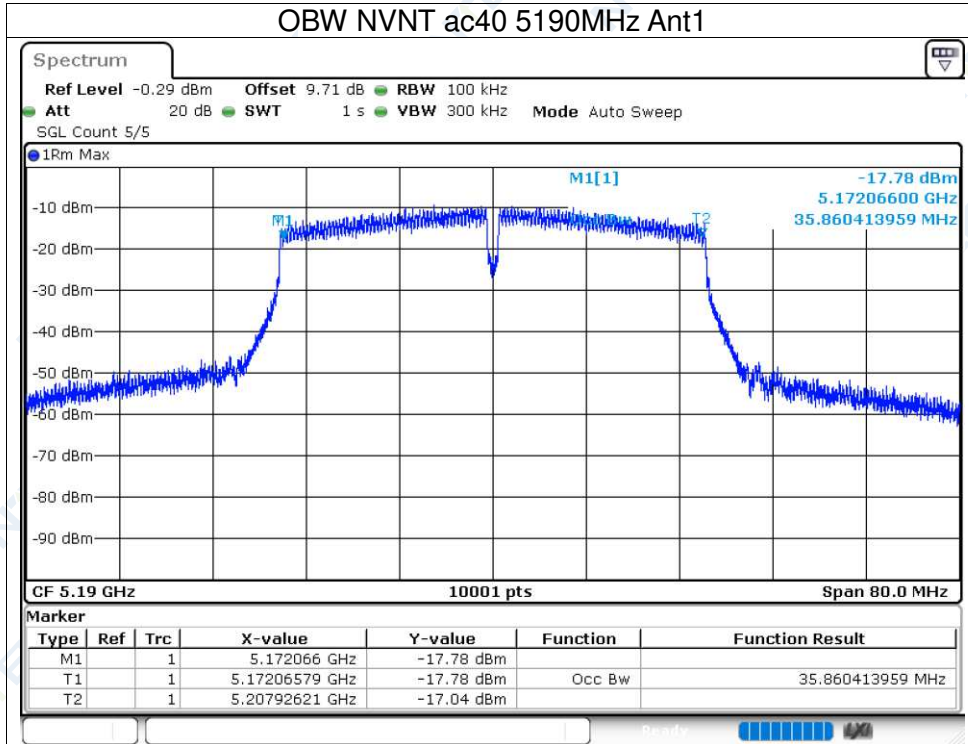


### 13.2 RF Output Power

Condition	Mode	Frequency (MHz)	Antenna	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	9.1	72	10.1	23	Pass
NVNT	n20	5180	Ant1	9.04	77	10.04	23	Pass
NVNT	n40	5190	Ant1	8.87	148	9.87	23	Pass
NVNT	ac20	5210	Ant1	8.65	76	9.65	23	Pass
NVNT	ac40	5180	Ant1	8.91	148	9.91	23	Pass
NVNT	ac80	5190	Ant1	9.02	278	10.02	23	Pass
NVLT	a	5180	Ant1	8.66	64	9.66	23	Pass
NVLT	n20	5180	Ant1	8.78	75	9.78	23	Pass
NVLT	n40	5190	Ant1	8.61	132	9.61	23	Pass
NVLT	ac20	5210	Ant1	8.39	228	9.39	23	Pass
NVLT	ac40	5180	Ant1	8.65	75	9.65	23	Pass
NVLT	ac80	5190	Ant1	8.76	139	9.76	23	Pass
NVHT	a	5180	Ant1	8.79	64	9.79	23	Pass
NVHT	n20	5180	Ant1	8.52	75	9.52	23	Pass
NVHT	n40	5190	Ant1	8.35	132	9.35	23	Pass
NVHT	ac20	5210	Ant1	8.13	228	9.13	23	Pass
NVHT	ac40	5180	Ant1	8.39	75	9.39	23	Pass
NVHT	ac80	5190	Ant1	8.5	139	9.5	23	Pass






Test Graphs



Power NVNT a 5180MHz Ant1

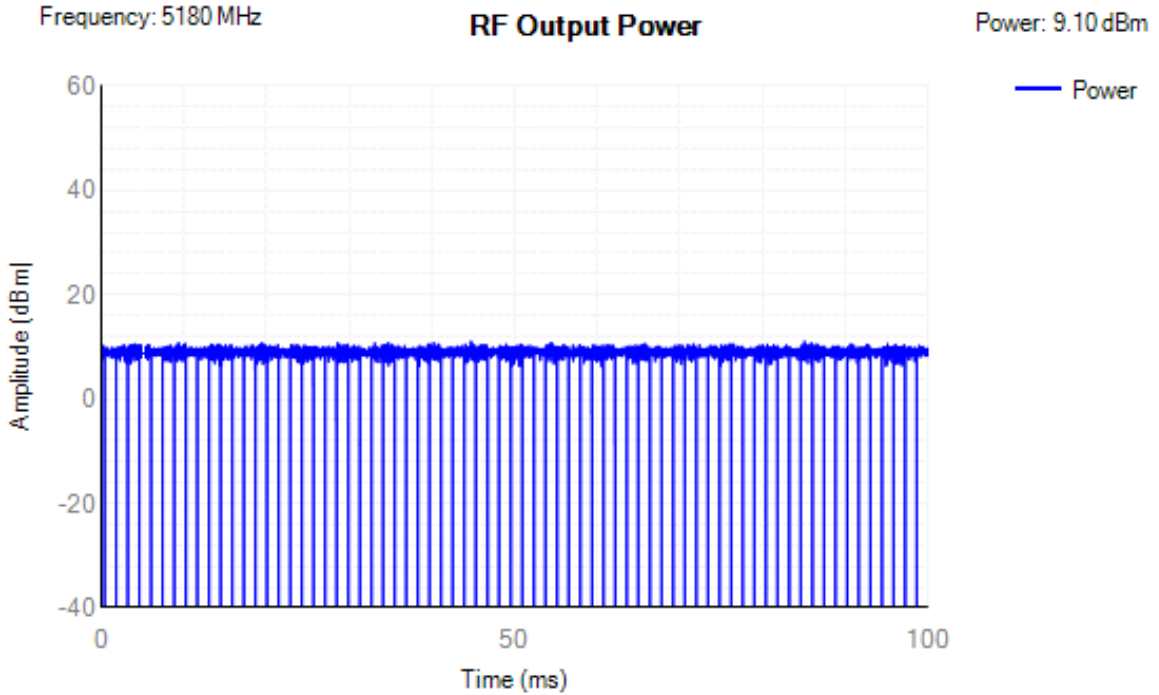

Power NVNT n20 5180MHz Ant1

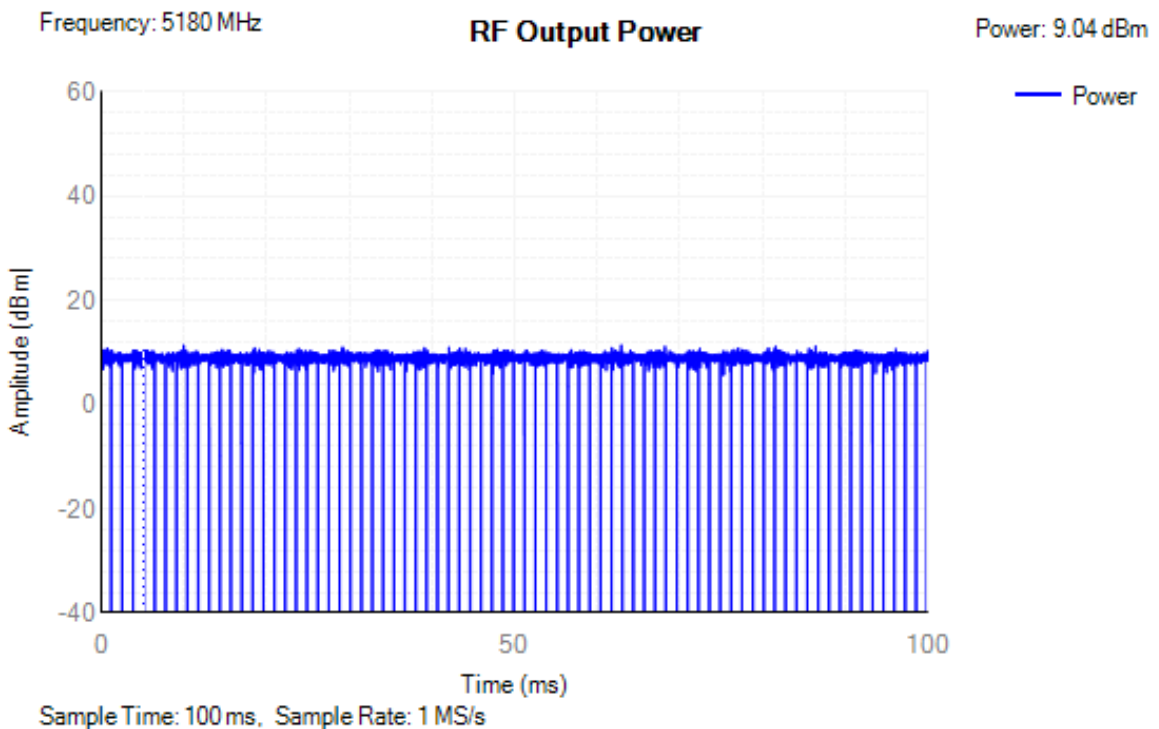

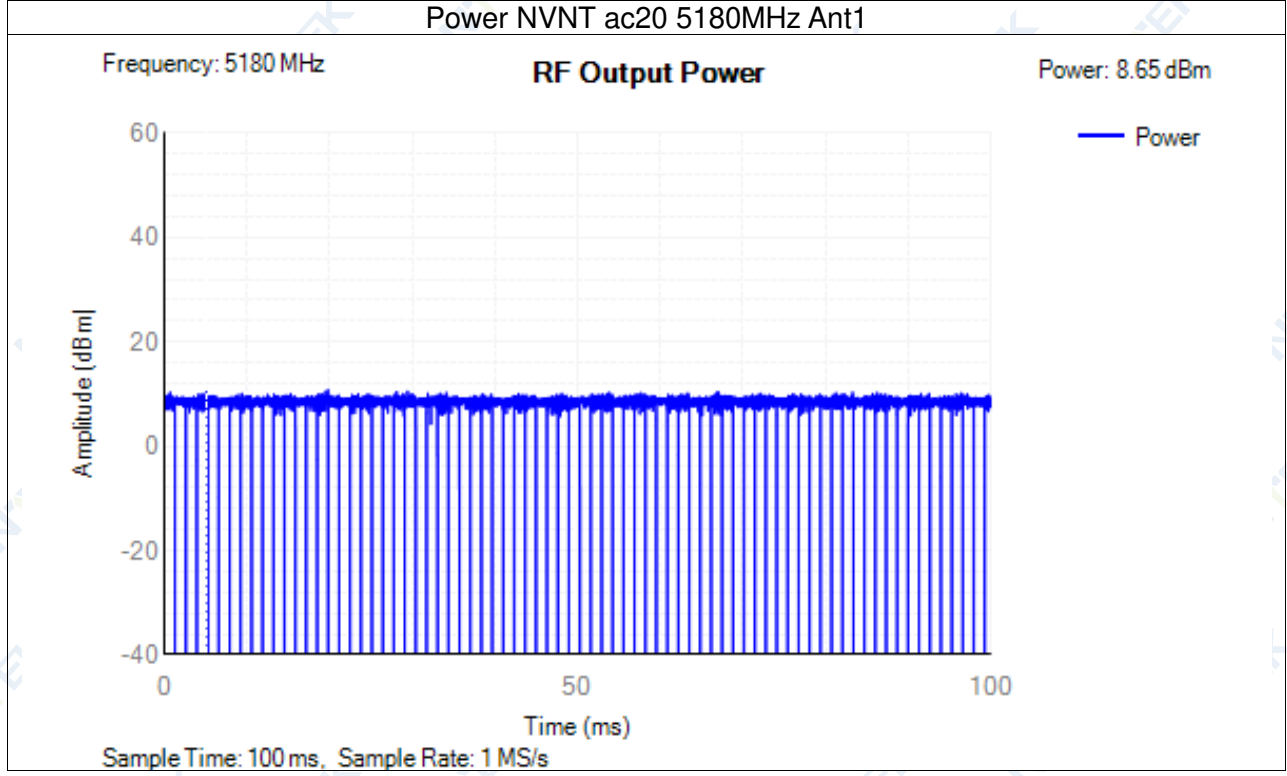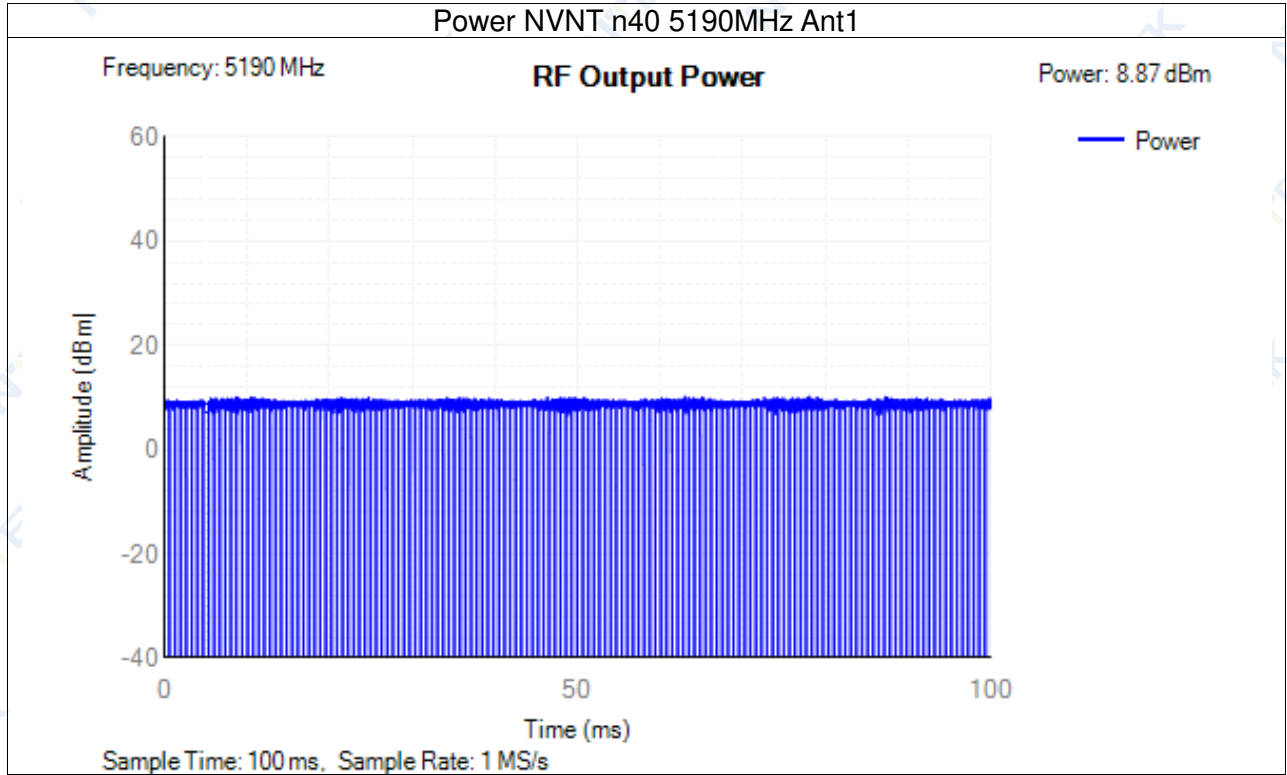

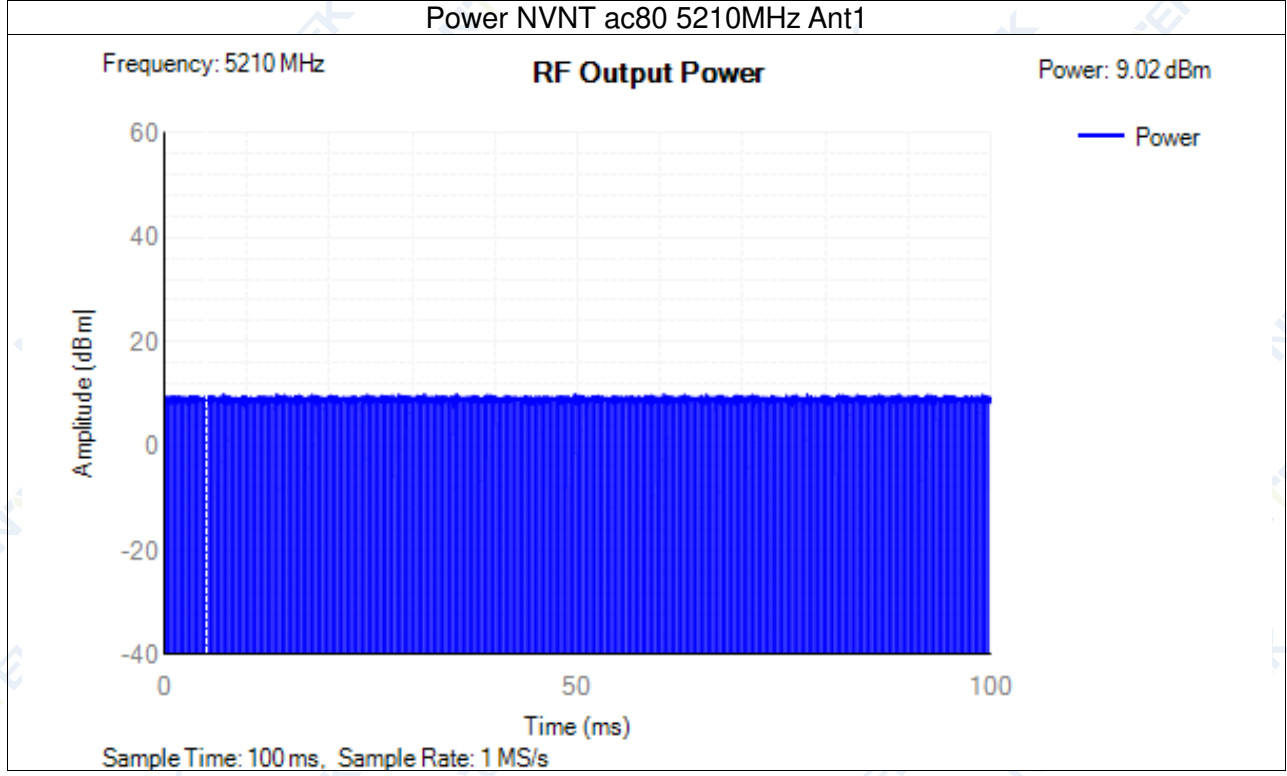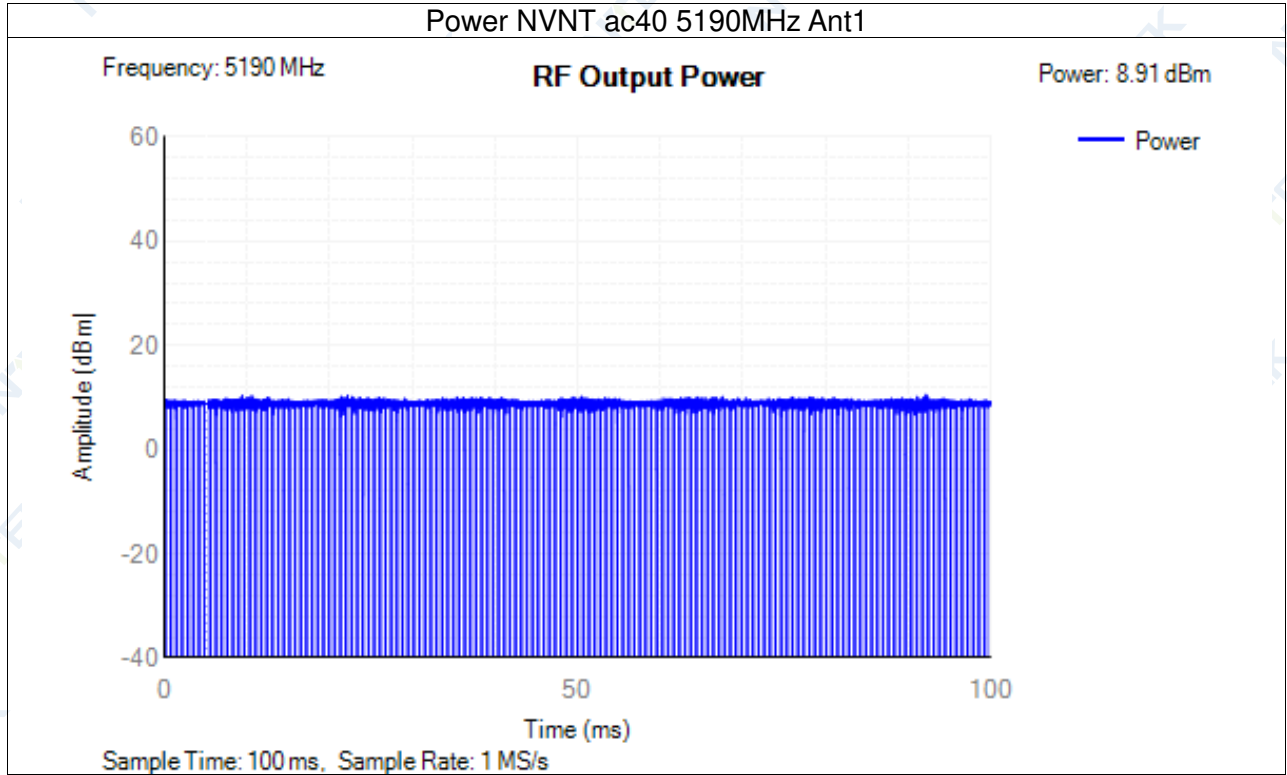


**13.3 Power Spectral Density**


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	-1.22	10	Pass
NVNT	n20	5180	Ant1	-1.58	10	Pass
NVNT	n40	5190	Ant1	-4.69	10	Pass
NVNT	ac20	5180	Ant1	-2.03	10	Pass
NVNT	ac40	5190	Ant1	-4.71	10	Pass
NVNT	ac80	5210	Ant1	-7.27	10	Pass

Test Graphs


PSD NVNT a 5180MHz Ant1

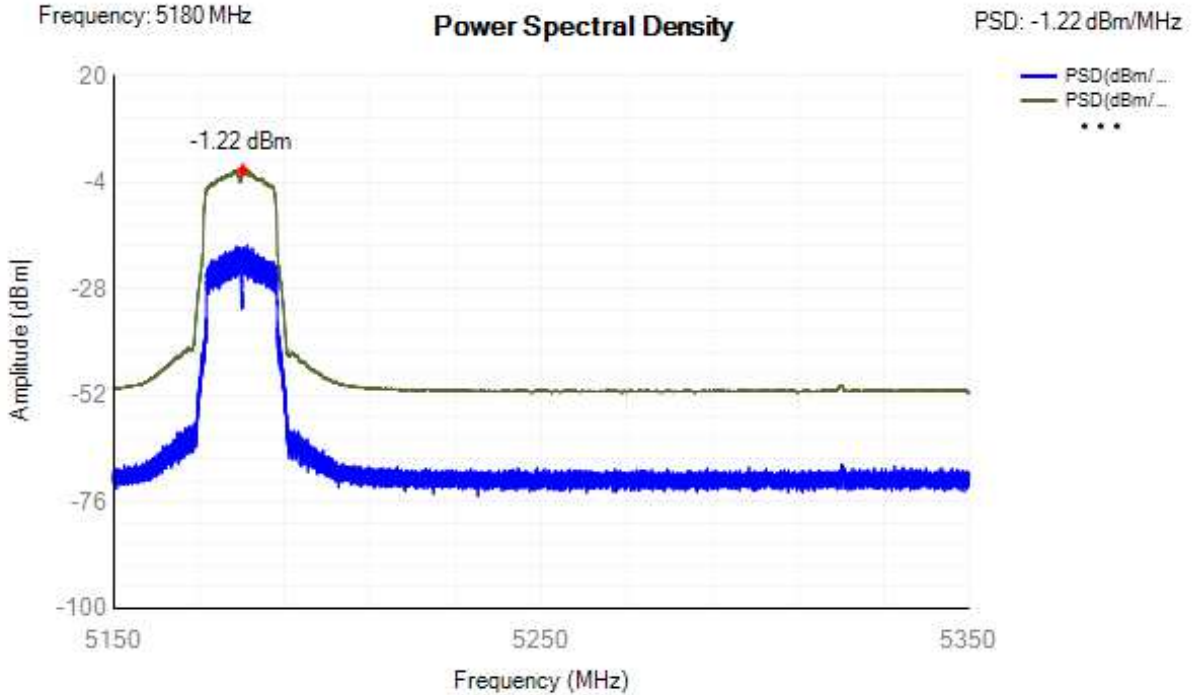


PSD NVNT n20 5180MHz Ant1

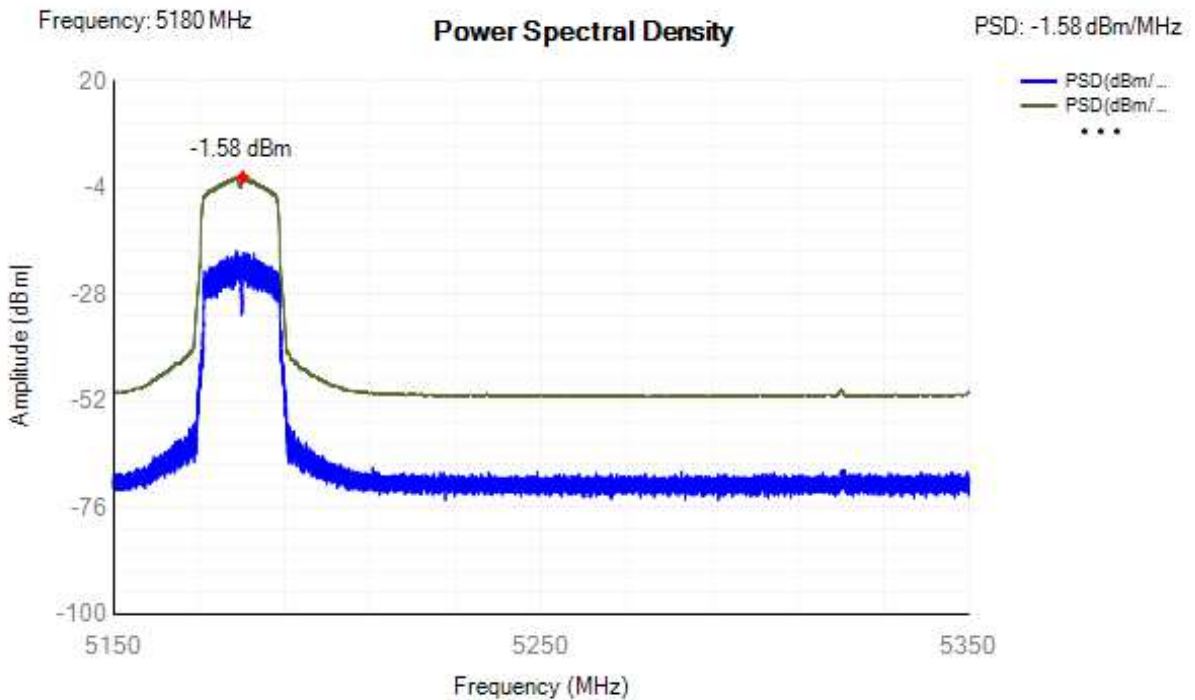


PSD NVNT n40 5190MHz Ant1

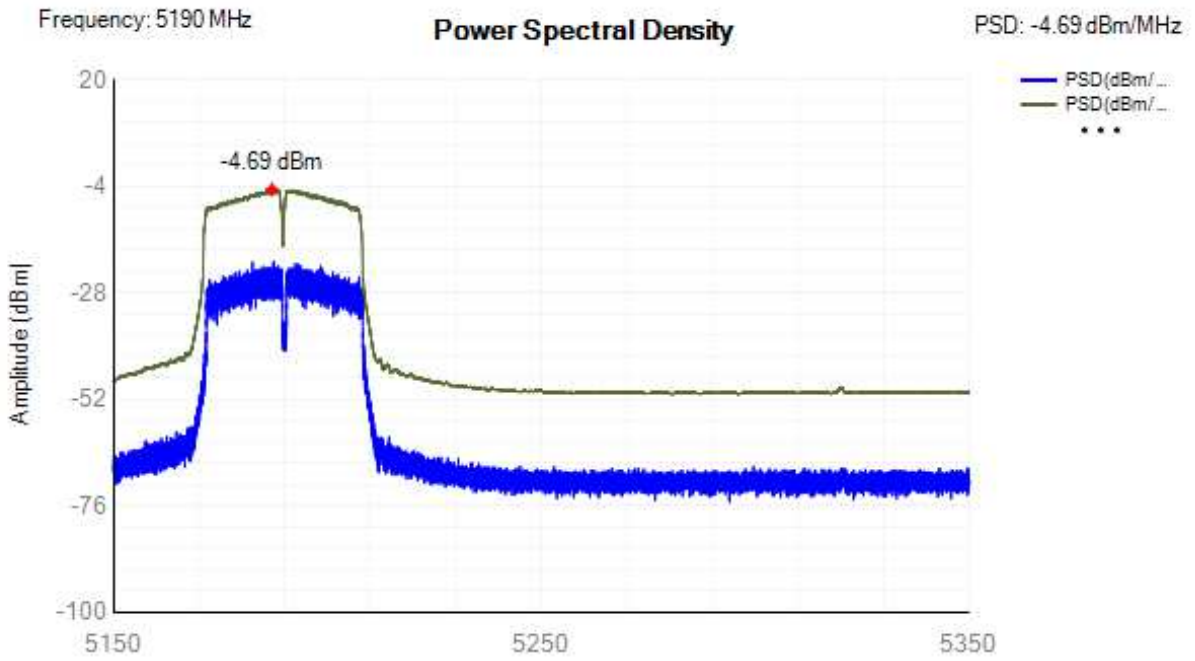


PSD NVNT ac20 5180MHz Ant1

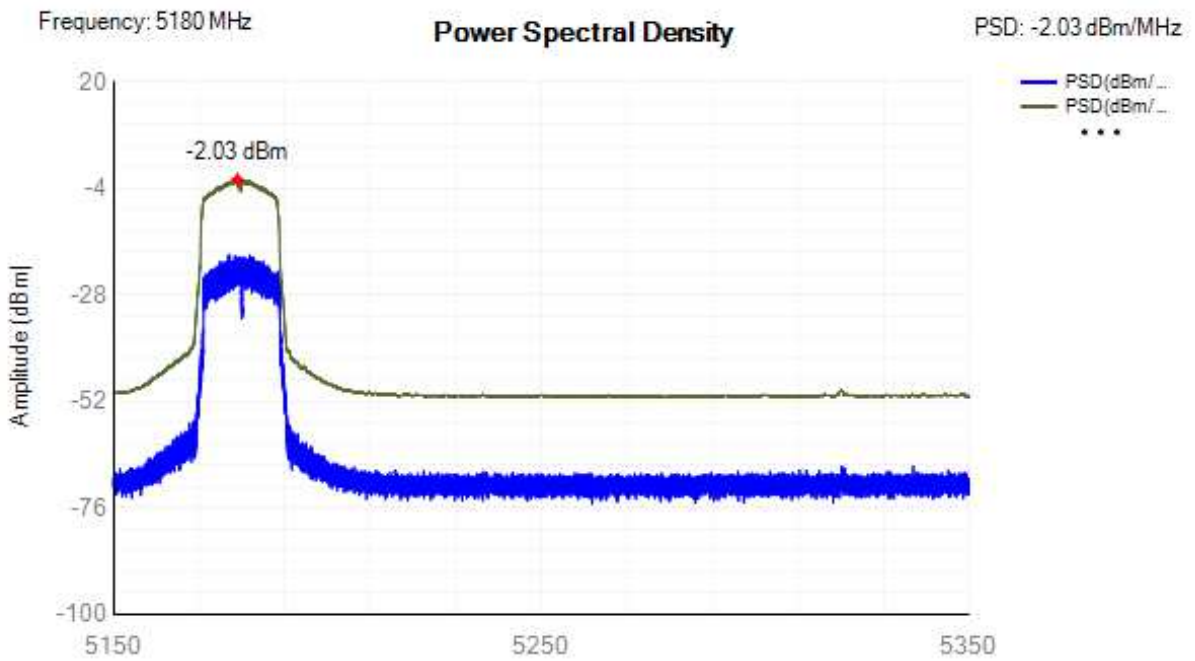

PSD NVNT ac40 5190MHz Ant1

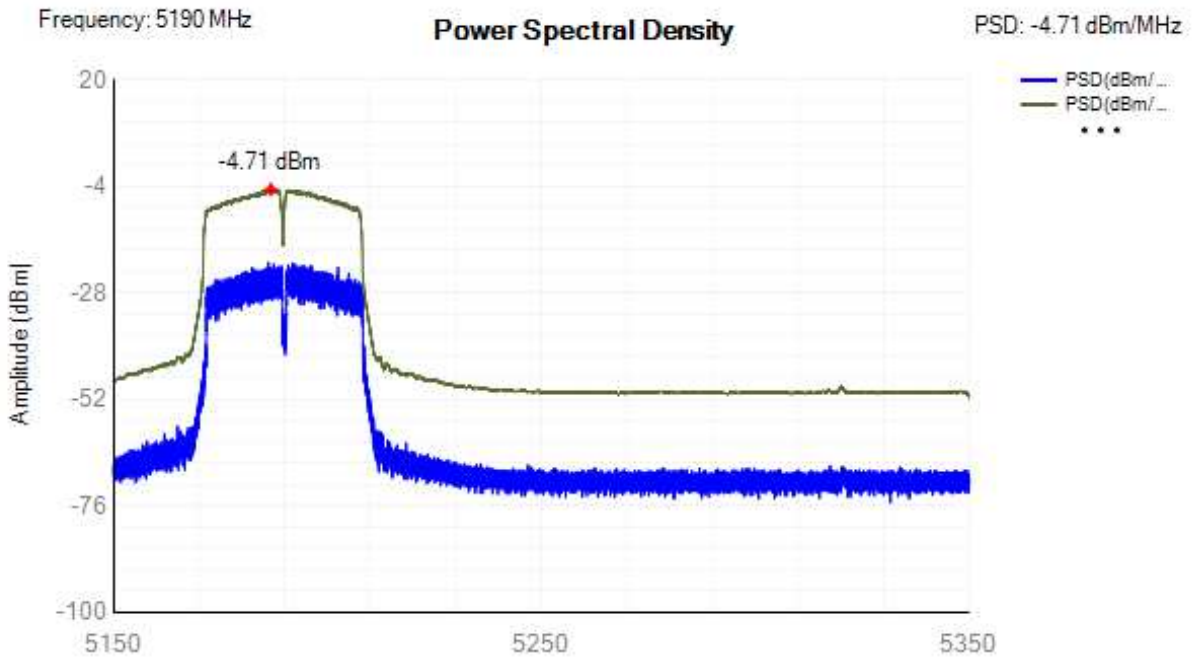

PSD NVNT ac80 5210MHz Ant1

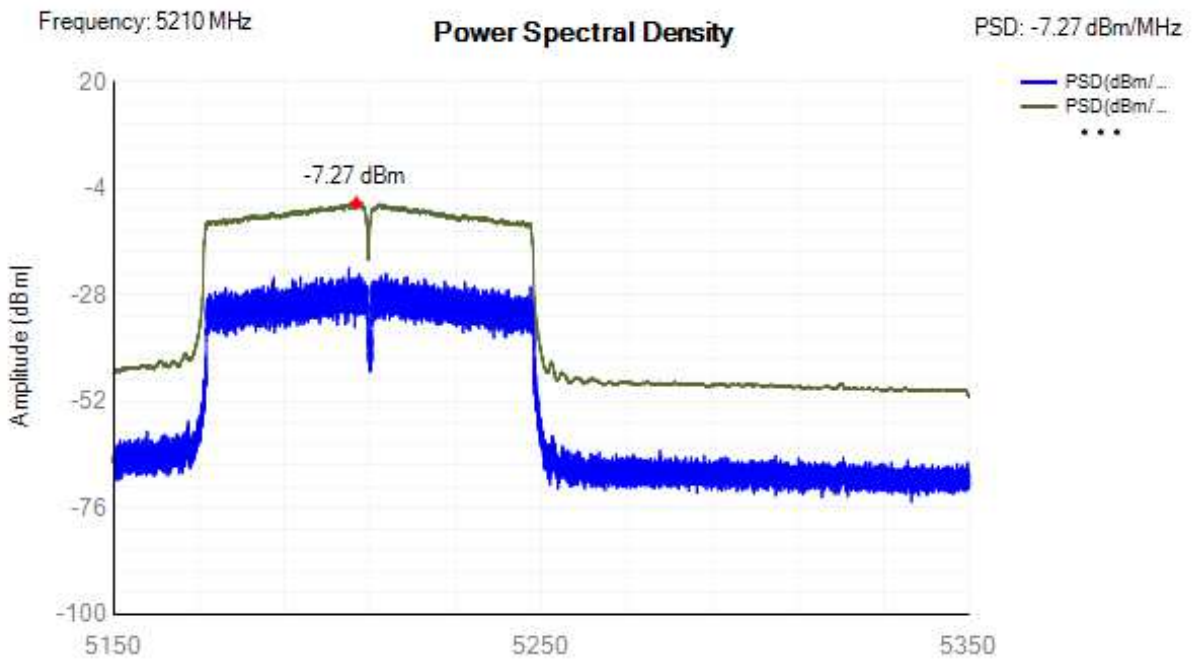

### 13.4 Transmitter unwanted emissions in the spurious domain


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	30 -47	32.80	-76.33	NA	-36	Pass
NVNT	a	5180	Ant1	47 -74	49.10	-76.11	NA	-54	Pass
NVNT	a	5180	Ant1	74 -87.5	76.60	-75.82	NA	-36	Pass
NVNT	a	5180	Ant1	87.5 -118	98.30	-76.21	NA	-54	Pass
NVNT	a	5180	Ant1	118 -174	119.20	-75.20	NA	-36	Pass
NVNT	a	5180	Ant1	174 -230	194.10	-73.74	NA	-54	Pass
NVNT	a	5180	Ant1	230 -470	398.30	-74.80	NA	-36	Pass
NVNT	a	5180	Ant1	470 -862	861.80	-74.26	NA	-54	Pass
NVNT	a	5180	Ant1	862 -1000	973.80	-62.25	NA	-36	Pass
NVNT	a	5180	Ant1	1000 -5150	5148.00	-41.37	NA	-30	Pass
NVNT	a	5180	Ant1	5350 -5470	5354.00	-48.24	NA	-30	Pass
NVNT	a	5180	Ant1	5725 -26000	22775.00	-43.87	NA	-30	Pass
NVNT	n20	5180	Ant1	30 -47	40.10	-75.75	NA	-36	Pass
NVNT	n20	5180	Ant1	47 -74	50.90	-74.79	NA	-54	Pass
NVNT	n20	5180	Ant1	74 -87.5	74.70	-75.65	NA	-36	Pass
NVNT	n20	5180	Ant1	87.5 -118	89.30	-75.36	NA	-54	Pass
NVNT	n20	5180	Ant1	118 -174	139.10	-74.65	NA	-36	Pass
NVNT	n20	5180	Ant1	174 -230	212.20	-73.95	NA	-54	Pass
NVNT	n20	5180	Ant1	230 -470	372.00	-73.29	NA	-36	Pass
NVNT	n20	5180	Ant1	470 -862	807.50	-74.11	NA	-54	Pass
NVNT	n20	5180	Ant1	862 -1000	973.20	-64.13	NA	-36	Pass
NVNT	n20	5180	Ant1	1000 -5150	2478.00	-41.24	NA	-30	Pass
NVNT	n20	5180	Ant1	5350 -5470	5446.00	-47.36	NA	-30	Pass
NVNT	n20	5180	Ant1	5725 -26000	20187.00	-42.82	NA	-30	Pass
NVNT	n40	5190	Ant1	30 -47	32.90	-75.98	NA	-36	Pass
NVNT	n40	5190	Ant1	47 -74	67.30	-76.02	NA	-54	Pass
NVNT	n40	5190	Ant1	74 -87.5	80.00	-76.17	NA	-36	Pass
NVNT	n40	5190	Ant1	87.5 -118	110.70	-75.36	NA	-54	Pass
NVNT	n40	5190	Ant1	118 -174	133.50	-74.78	NA	-36	Pass
NVNT	n40	5190	Ant1	174 -230	203.00	-74.59	NA	-54	Pass
NVNT	n40	5190	Ant1	230 -470	364.50	-73.71	NA	-36	Pass
NVNT	n40	5190	Ant1	470 -862	503.10	-73.40	NA	-54	Pass
NVNT	n40	5190	Ant1	862 -1000	985.70	-64.05	NA	-36	Pass
NVNT	n40	5190	Ant1	1000 -5150	5149.00	-33.57	-33.14	-30	Pass
NVNT	n40	5190	Ant1	5350 -5470	5404.00	-47.26	NA	-30	Pass
NVNT	n40	5190	Ant1	5725 -26000	16291.00	-43.55	NA	-30	Pass
NVNT	ac20	5180	Ant1	30 -47	43.00	-75.64	NA	-36	Pass
NVNT	ac20	5180	Ant1	47 -74	58.00	-75.57	NA	-54	Pass
NVNT	ac20	5180	Ant1	74 -87.5	82.20	-76.10	NA	-36	Pass
NVNT	ac20	5180	Ant1	87.5 -118	113.30	-74.65	NA	-54	Pass
NVNT	ac20	5180	Ant1	118 -174	167.30	-74.13	NA	-36	Pass
NVNT	ac20	5180	Ant1	174 -230	204.80	-74.67	NA	-54	Pass
NVNT	ac20	5180	Ant1	230 -470	372.10	-74.05	NA	-36	Pass
NVNT	ac20	5180	Ant1	470 -862	729.50	-70.56	NA	-54	Pass
NVNT	ac20	5180	Ant1	862 -1000	974.40	-62.69	NA	-36	Pass
NVNT	ac20	5180	Ant1	1000 -5150	2467.00	-39.98	NA	-30	Pass
NVNT	ac20	5180	Ant1	5350 -5470	5458.00	-47.73	NA	-30	Pass
NVNT	ac20	5180	Ant1	5725 -26000	15943.00	-43.18	NA	-30	Pass
NVNT	ac40	5190	Ant1	30 -47	32.10	-75.58	NA	-36	Pass
NVNT	ac40	5190	Ant1	47 -74	68.00	-74.99	NA	-54	Pass
NVNT	ac40	5190	Ant1	74 -87.5	74.90	-75.74	NA	-36	Pass
NVNT	ac40	5190	Ant1	87.5 -118	90.90	-75.03	NA	-54	Pass
NVNT	ac40	5190	Ant1	118 -174	143.90	-74.89	NA	-36	Pass




NVNT	ac40	5190	Ant1	174 -230	206.10	-74.41	NA	-54	Pass
NVNT	ac40	5190	Ant1	230 -470	324.90	-73.77	NA	-36	Pass
NVNT	ac40	5190	Ant1	470 -862	482.90	-74.02	NA	-54	Pass
NVNT	ac40	5190	Ant1	862 -1000	985.70	-65.39	NA	-36	Pass
NVNT	ac40	5190	Ant1	1000 -5150	5149.00	-35.42	-40.33	-30	Pass
NVNT	ac40	5190	Ant1	5350 -5470	5370.00	-47.38	NA	-30	Pass
NVNT	ac40	5190	Ant1	5725 -26000	16732.00	-43.61	NA	-30	Pass
NVNT	ac80	5210	Ant1	30 -47	38.40	-75.17	NA	-36	Pass
NVNT	ac80	5210	Ant1	47 -74	60.00	-68.64	NA	-54	Pass
NVNT	ac80	5210	Ant1	74 -87.5	79.90	-75.04	NA	-36	Pass
NVNT	ac80	5210	Ant1	87.5 -118	116.80	-74.39	NA	-54	Pass
NVNT	ac80	5210	Ant1	118 -174	163.40	-74.80	NA	-36	Pass
NVNT	ac80	5210	Ant1	174 -230	224.40	-74.29	NA	-54	Pass
NVNT	ac80	5210	Ant1	230 -470	392.20	-73.74	NA	-36	Pass
NVNT	ac80	5210	Ant1	470 -862	634.30	-73.62	NA	-54	Pass
NVNT	ac80	5210	Ant1	862 -1000	948.30	-67.87	NA	-36	Pass
NVNT	ac80	5210	Ant1	1000 -5150	5144.00	-30.72	-35.18	-30	Pass
NVNT	ac80	5210	Ant1	5350 -5470	5359.00	-43.48	NA	-30	Pass
NVNT	ac80	5210	Ant1	5725 -26000	16712.00	-43.32	NA	-30	Pass

Test Graphs


Tx. Spurious NVNT a 5180MHz Ant1

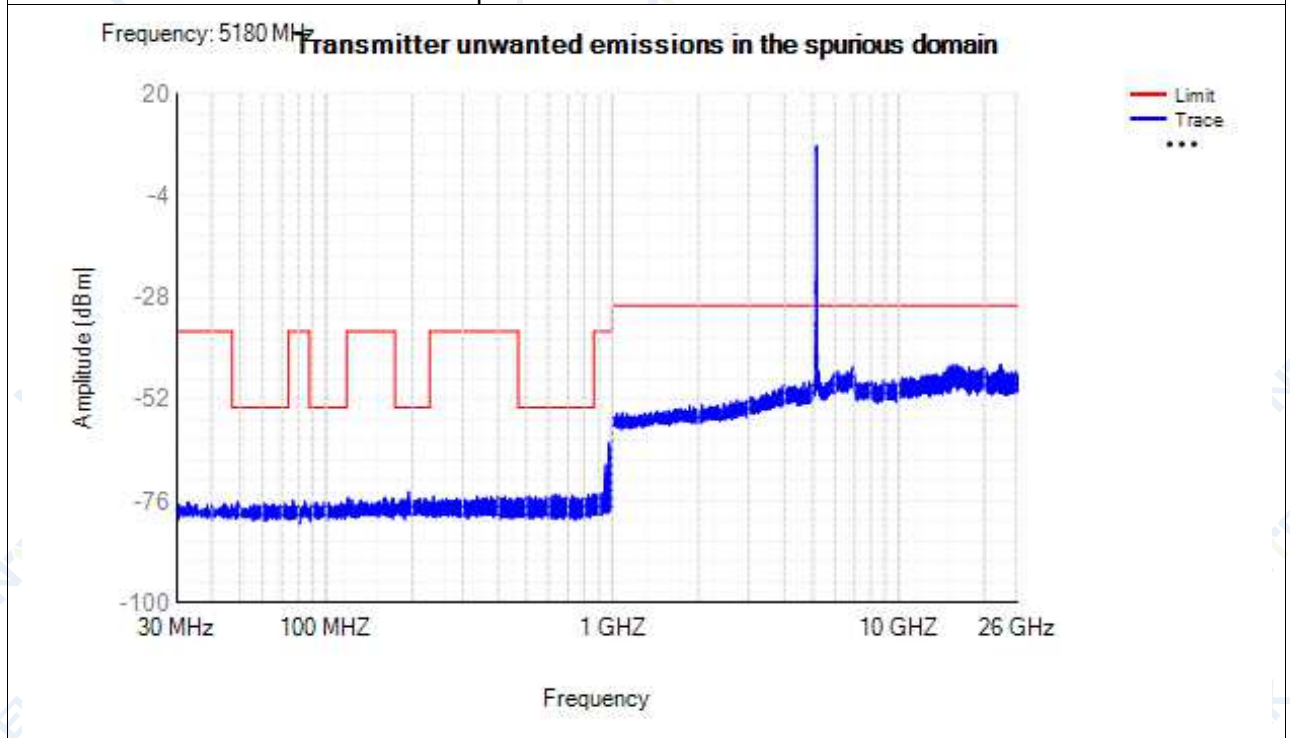


Tx. Spurious NVNT n20 5180MHz Ant1

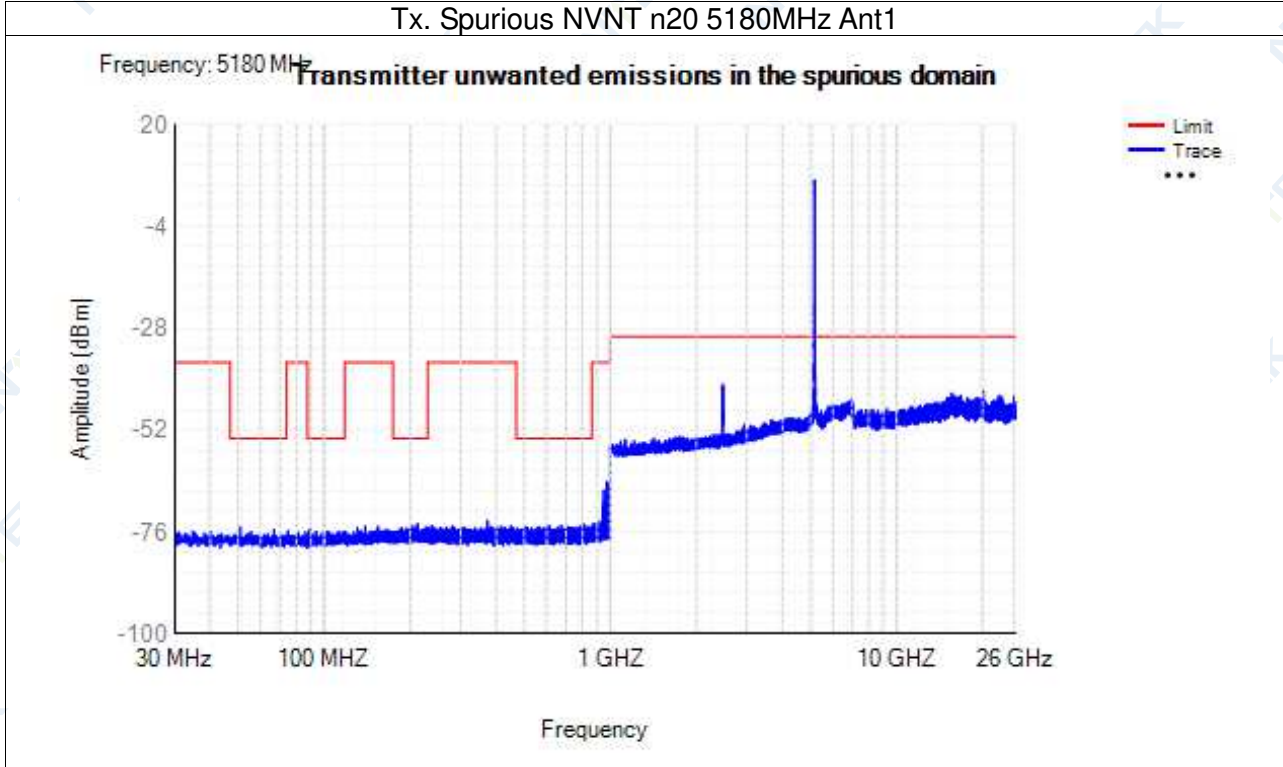


Tx. Spurious NVNT n40 5190MHz Ant1

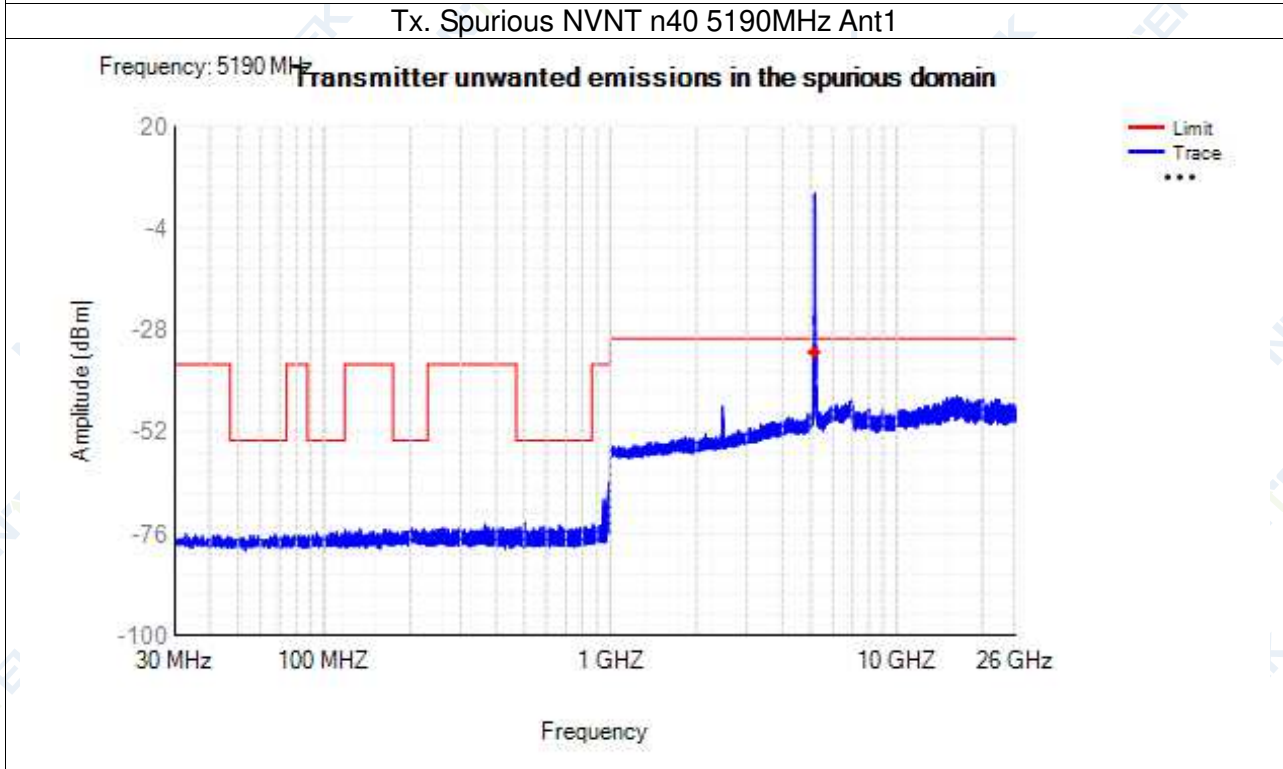


Tx. Spurious NVNT ac20 5180MHz Ant1

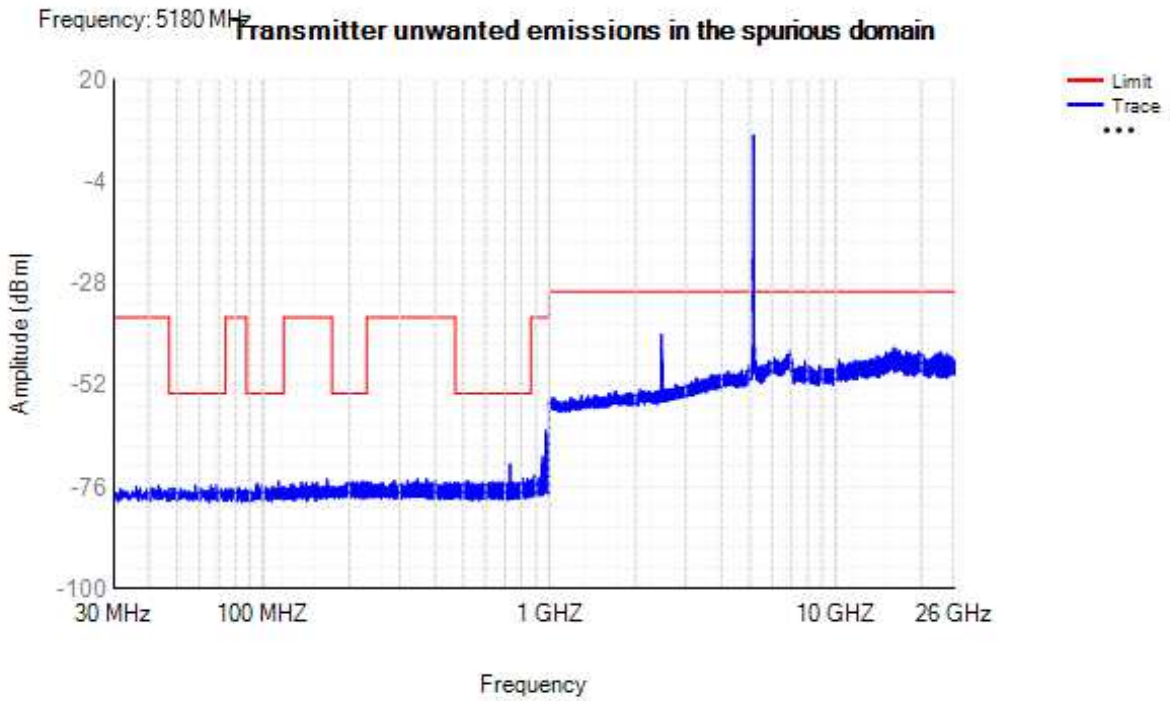

Tx. Spurious NVNT ac40 5190MHz Ant1

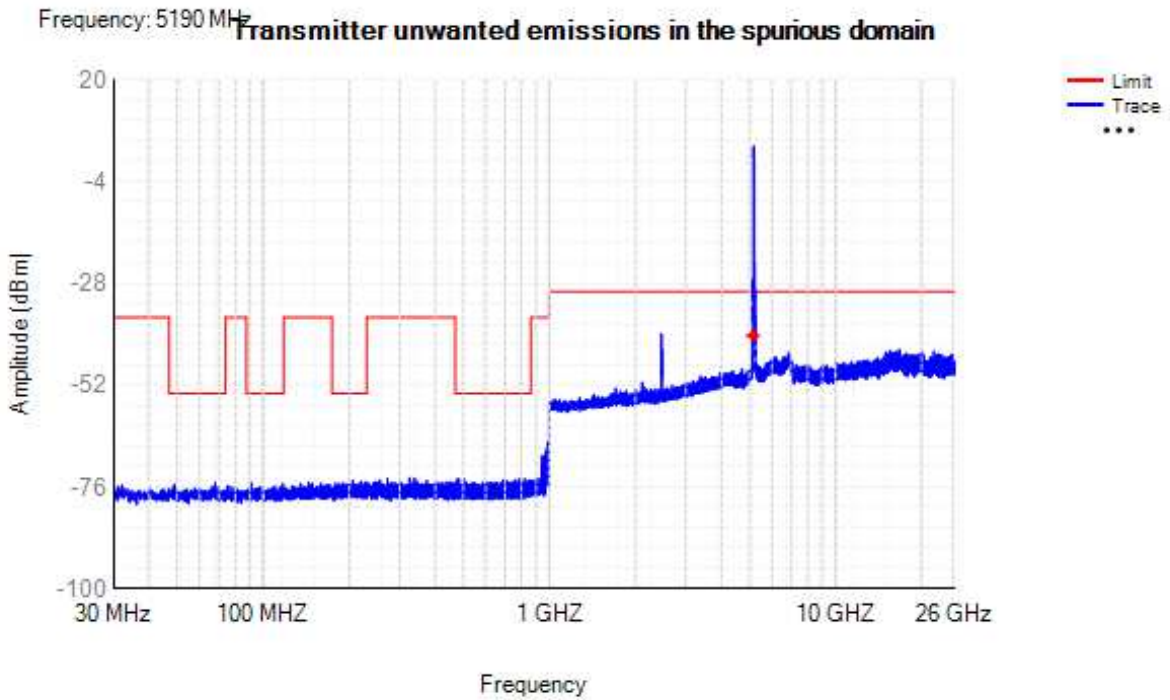

Tx. Spurious NVNT ac80 5210MHz Ant1

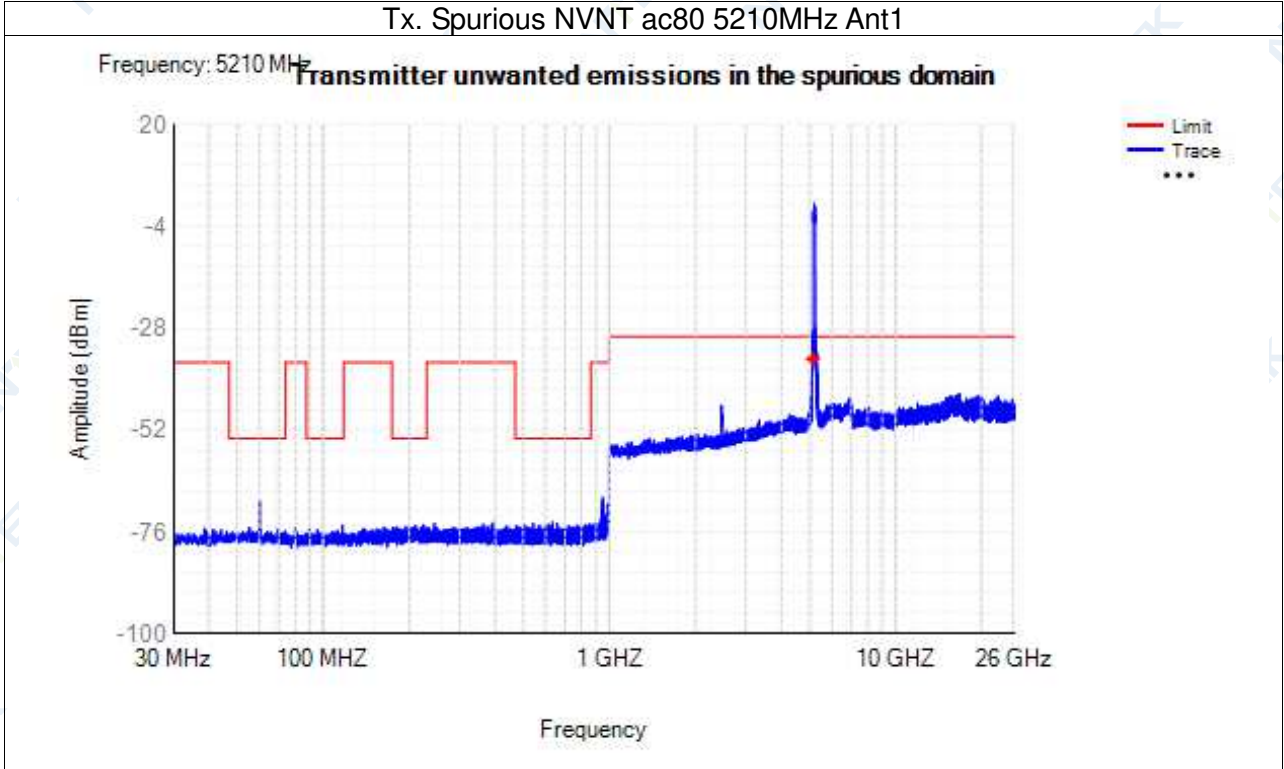


**13.5 Transmitter unwanted emissions within the 5 GHz RLAN bands**


Condition	Mode	Frequency (MHz)	Antenna	Sub Band	Worst EIB Frequency (MHz)	Level (dB)	Limit (dB)	Verdict
NVNT	a	5180	Ant1	Band1	5210.08	-55.09	-40	Pass
NVNT	a	5180	Ant1	Band2	5470	-67.65	-47	Pass
NVNT	n20	5180	Ant1	Band1	5210.08	-54.76	-40	Pass
NVNT	n20	5180	Ant1	Band2	5470.36	-66.7	-47	Pass
NVNT	n40	5190	Ant1	Band1	5249.8	-54.15	-39.88	Pass
NVNT	n40	5190	Ant1	Band2	5724.8	-63.8	-47	Pass
NVNT	ac20	5180	Ant1	Band1	5210	-54.78	-40	Pass
NVNT	ac20	5180	Ant1	Band2	5722.55	-66.77	-47	Pass
NVNT	ac40	5190	Ant1	Band1	5250	-54.24	-40	Pass
NVNT	ac40	5190	Ant1	Band2	5705.26	-63.8	-47	Pass
NVNT	ac80	5210	Ant1	Band1	5330.16	-50.56	-40	Pass
NVNT	ac80	5210	Ant1	Band2	5470.1	-59.79	-40	Pass

Test Graphs


Tx. Emissions EIB NVNT a 5180MHz Sub Band1

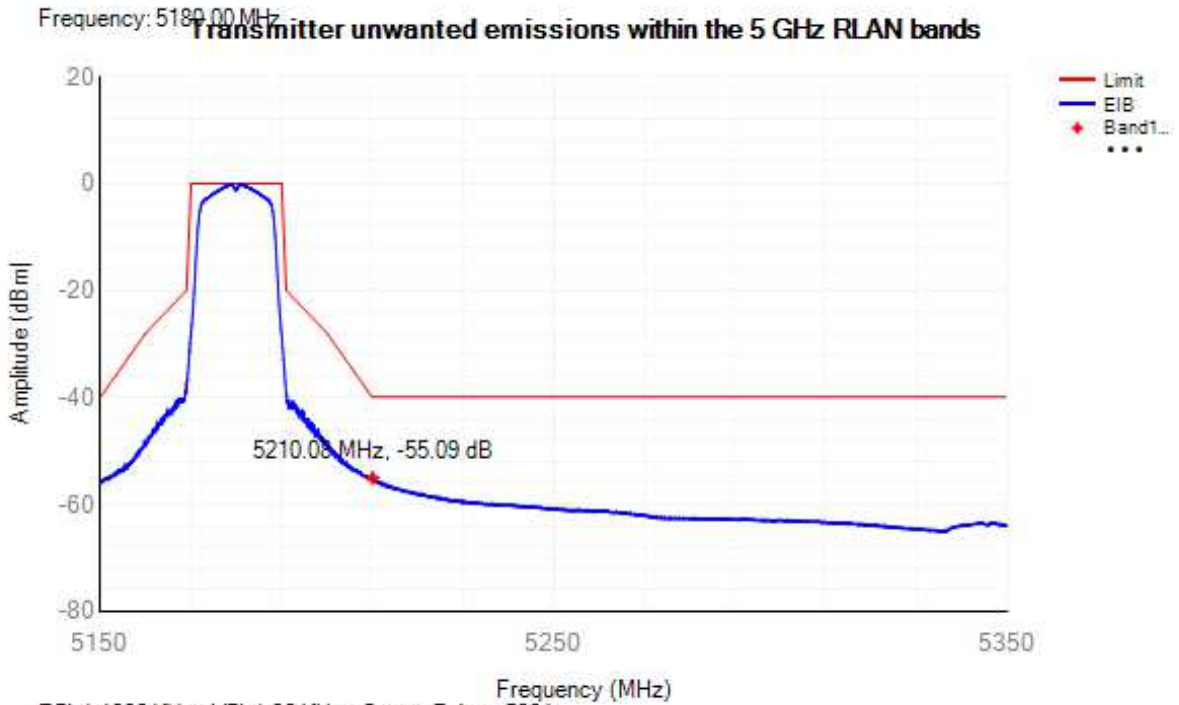


Tx. Emissions EIB NVNT a 5180MHz Sub Band2

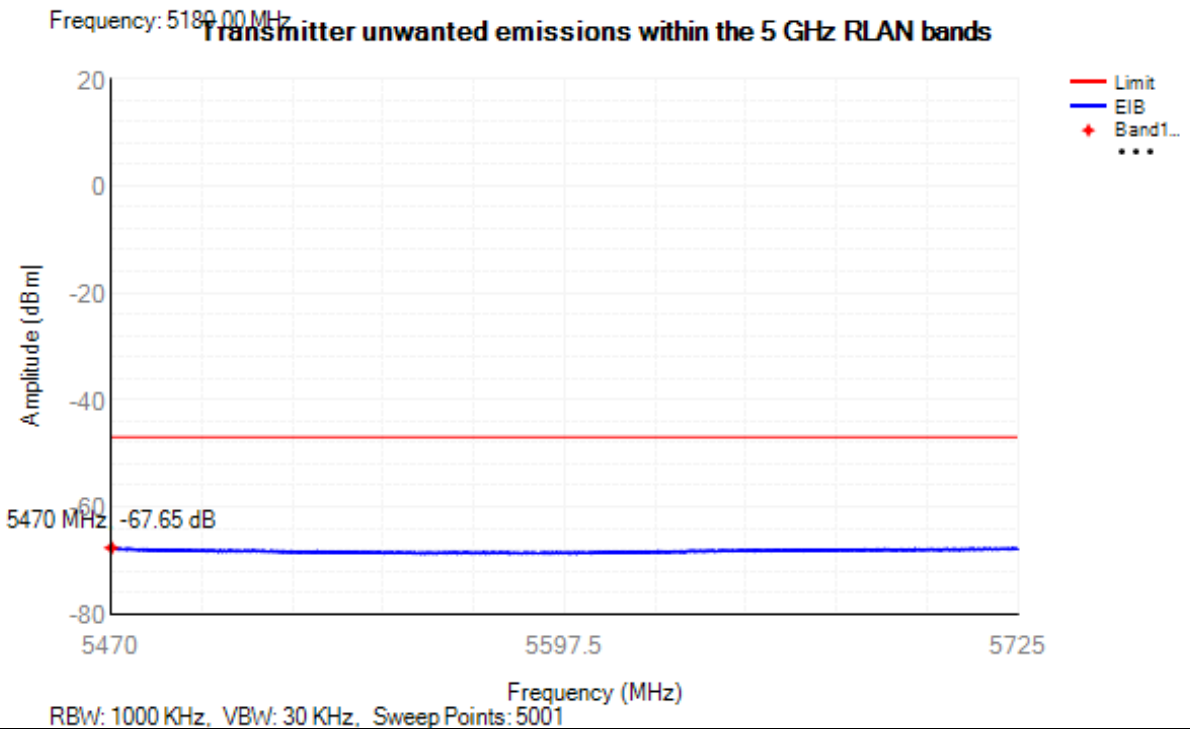


Tx. Emissions EIB NVNT n20 5180MHz Sub Band1

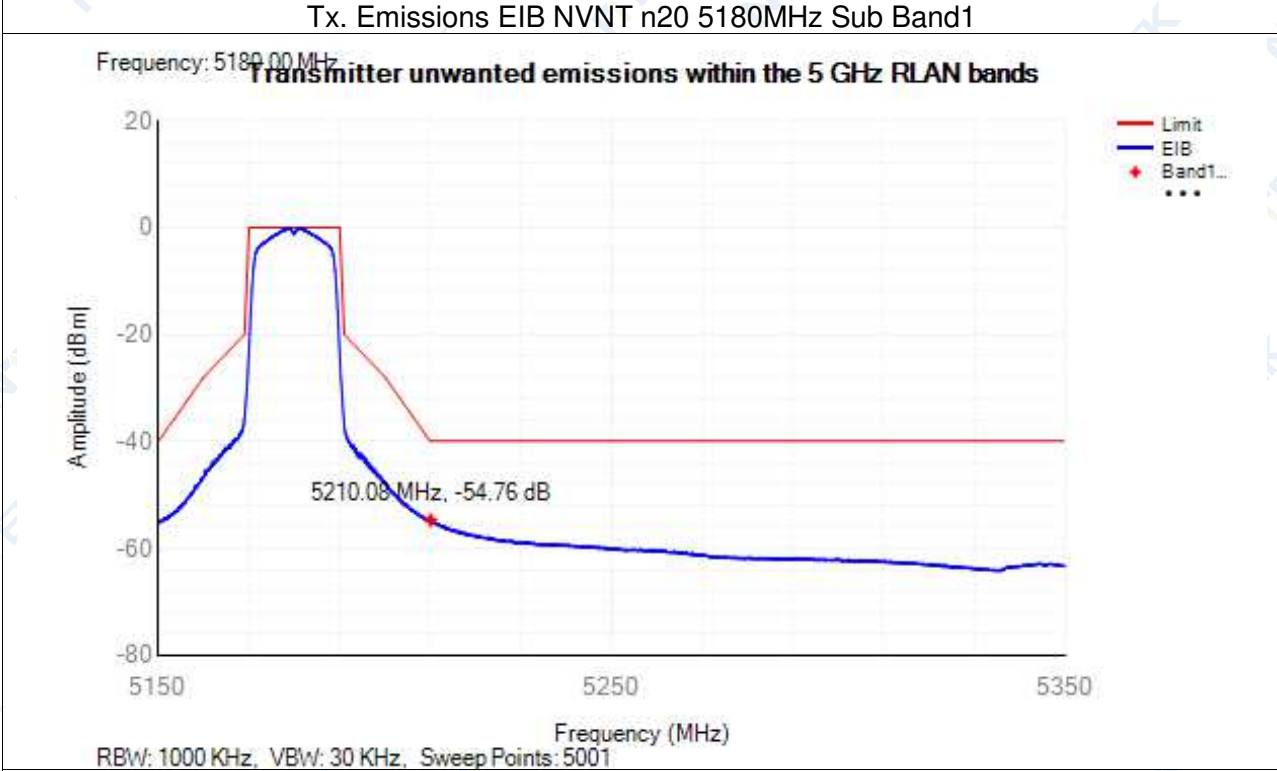


Tx. Emissions EIB NVNT n20 5180MHz Sub Band2

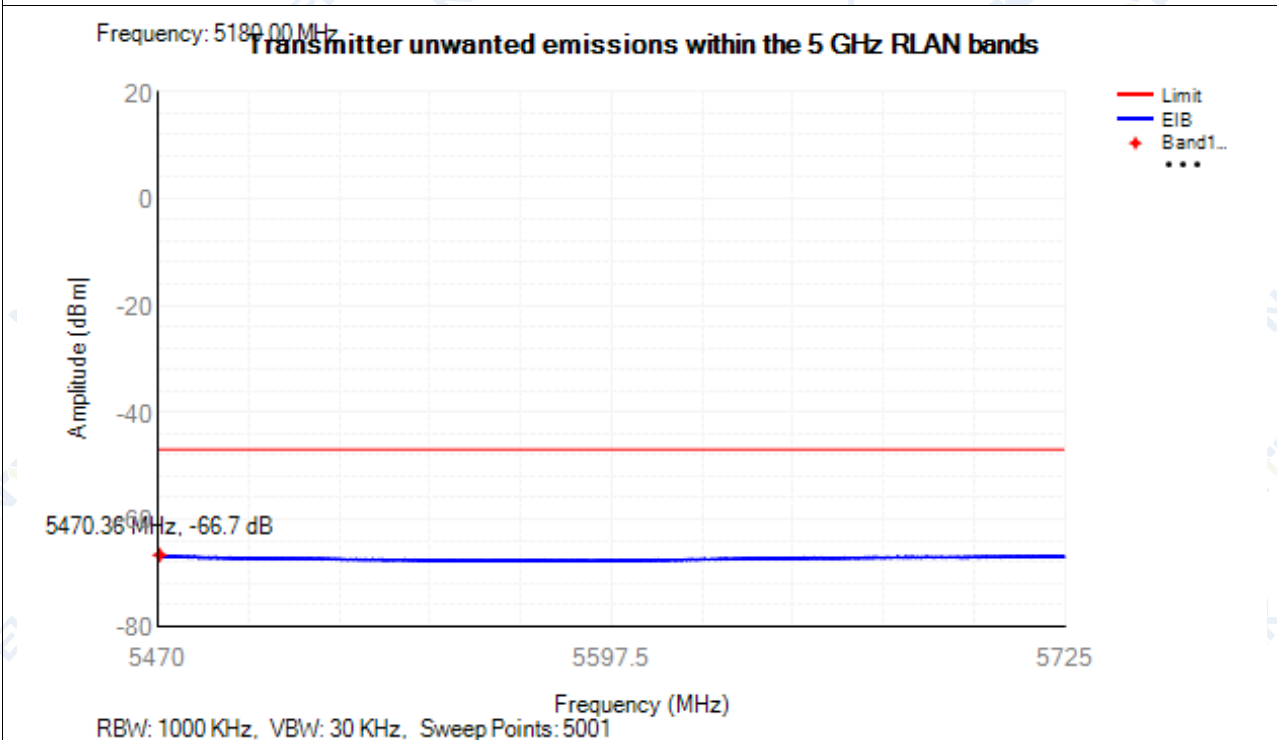

Tx. Emissions EIB NVNT n40 5190MHz Sub Band1

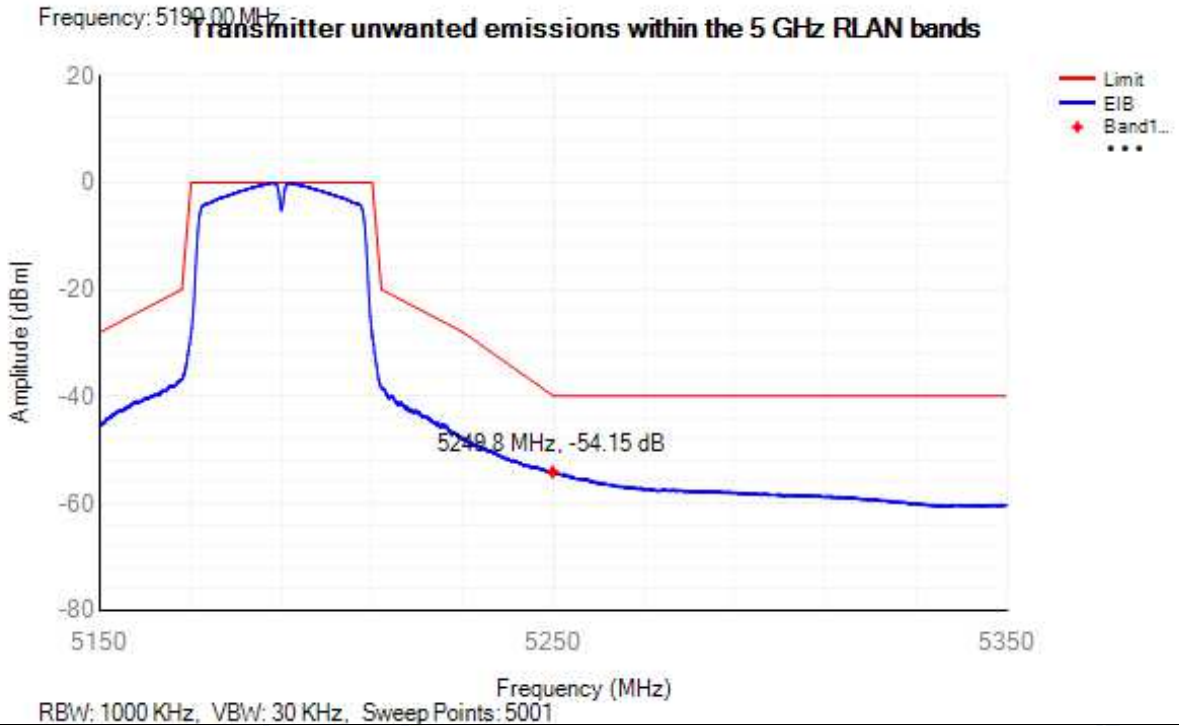


Tx. Emissions EIB NVNT n40 5190MHz Sub Band2

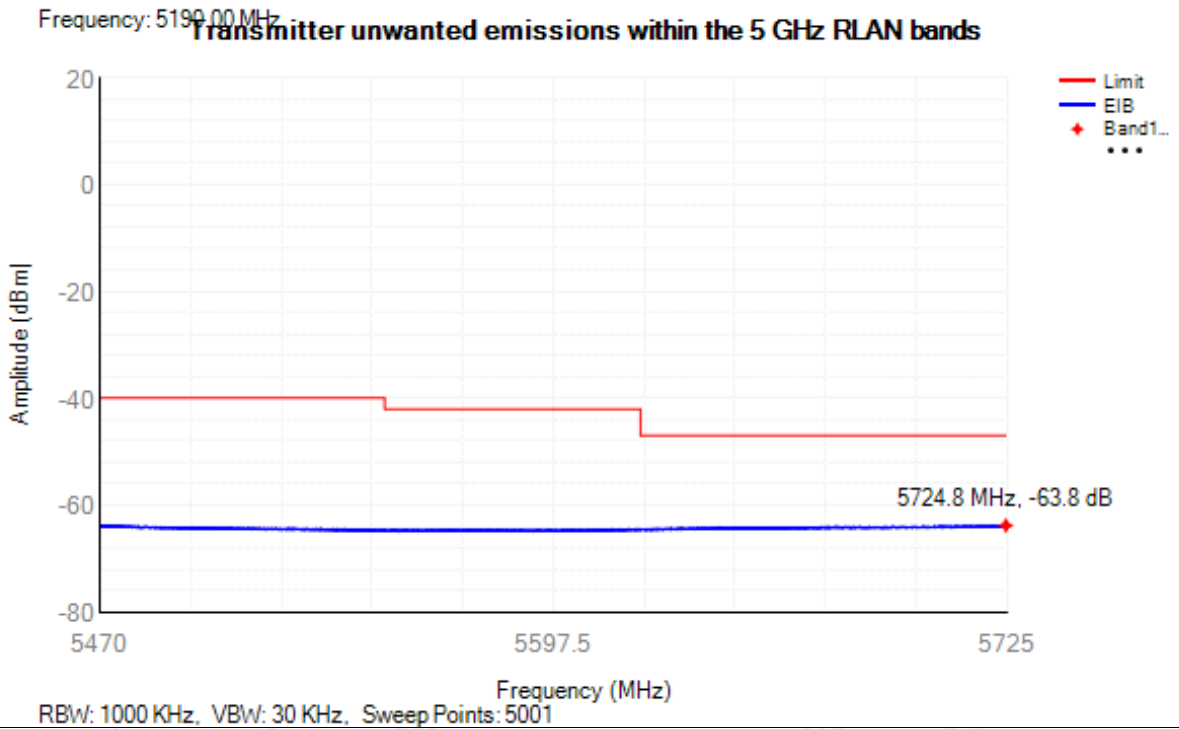





Tx. Emissions EIB NVNT ac20 5180MHz Sub Band1

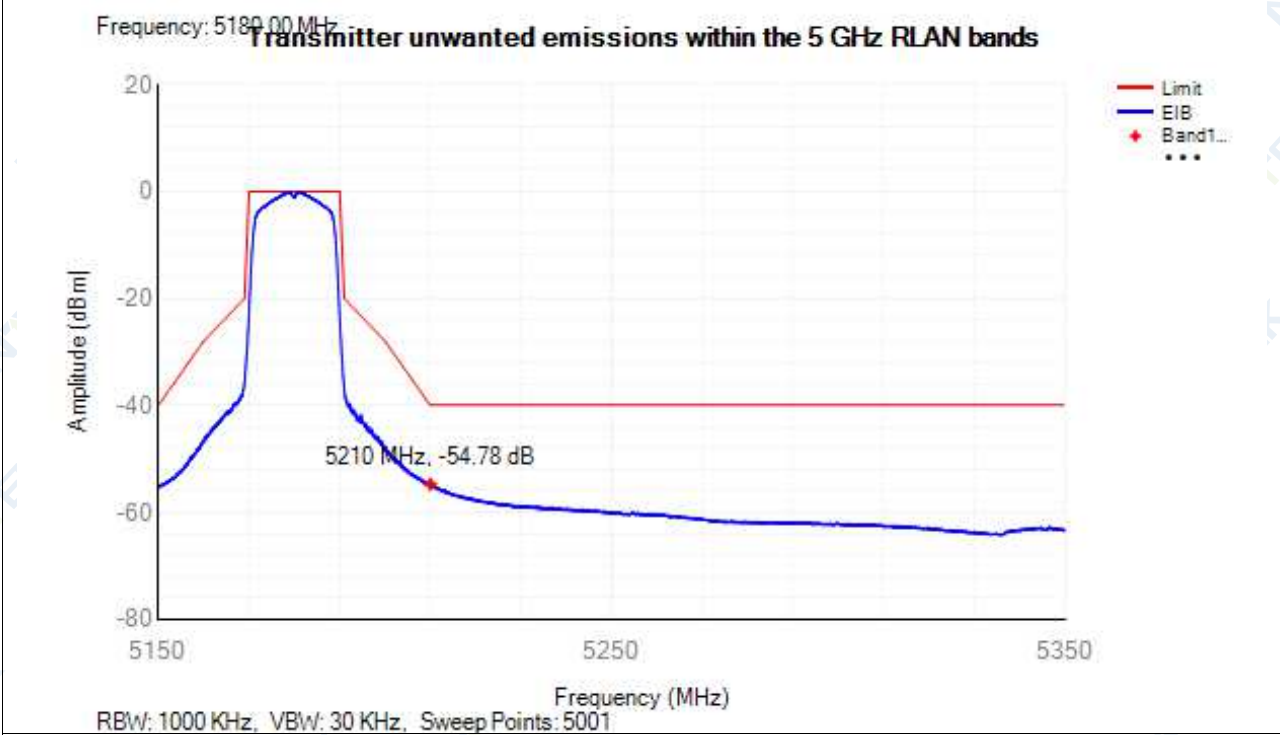


Tx. Emissions EIB NVNT ac20 5180MHz Sub Band2

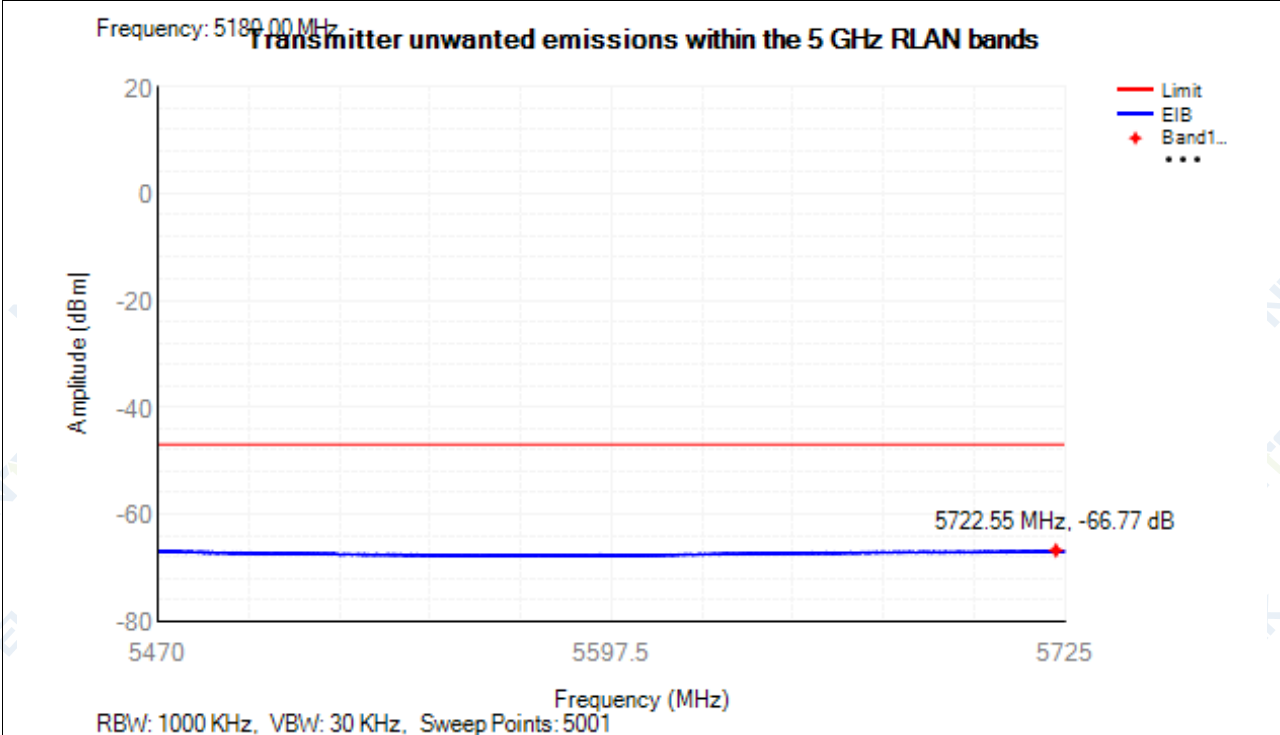


Tx. Emissions EIB NVNT ac40 5190MHz Sub Band1

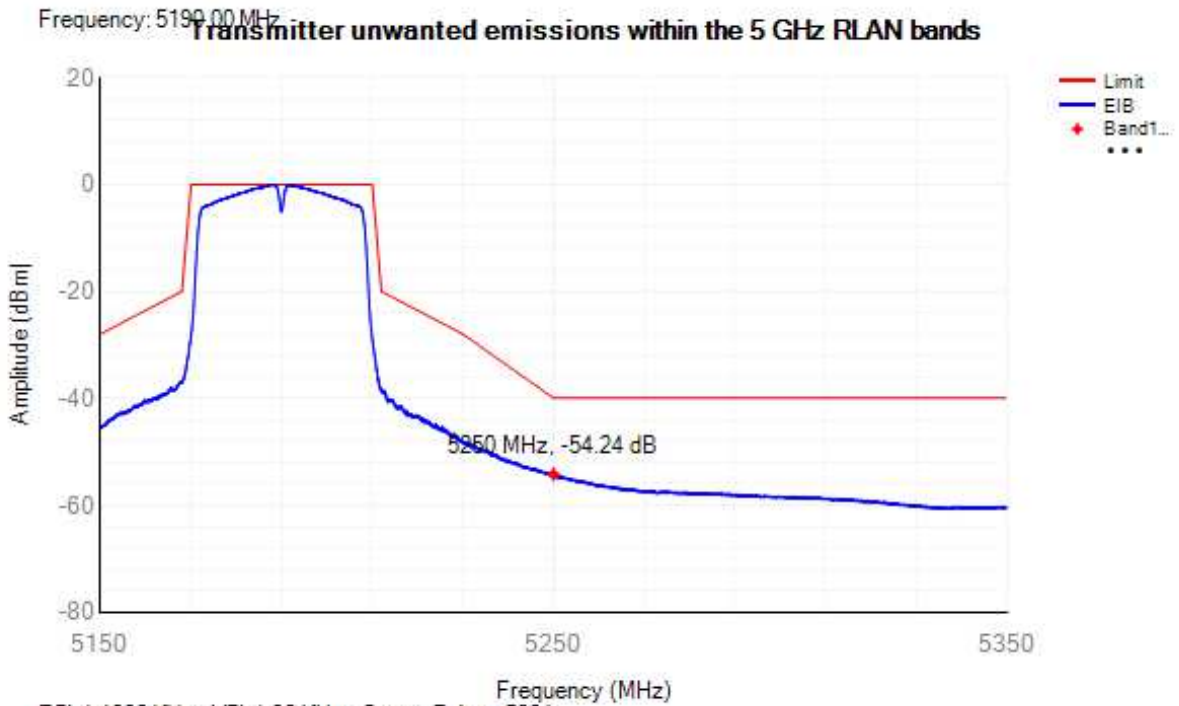


Tx. Emissions EIB NVNT ac40 5190MHz Sub Band2

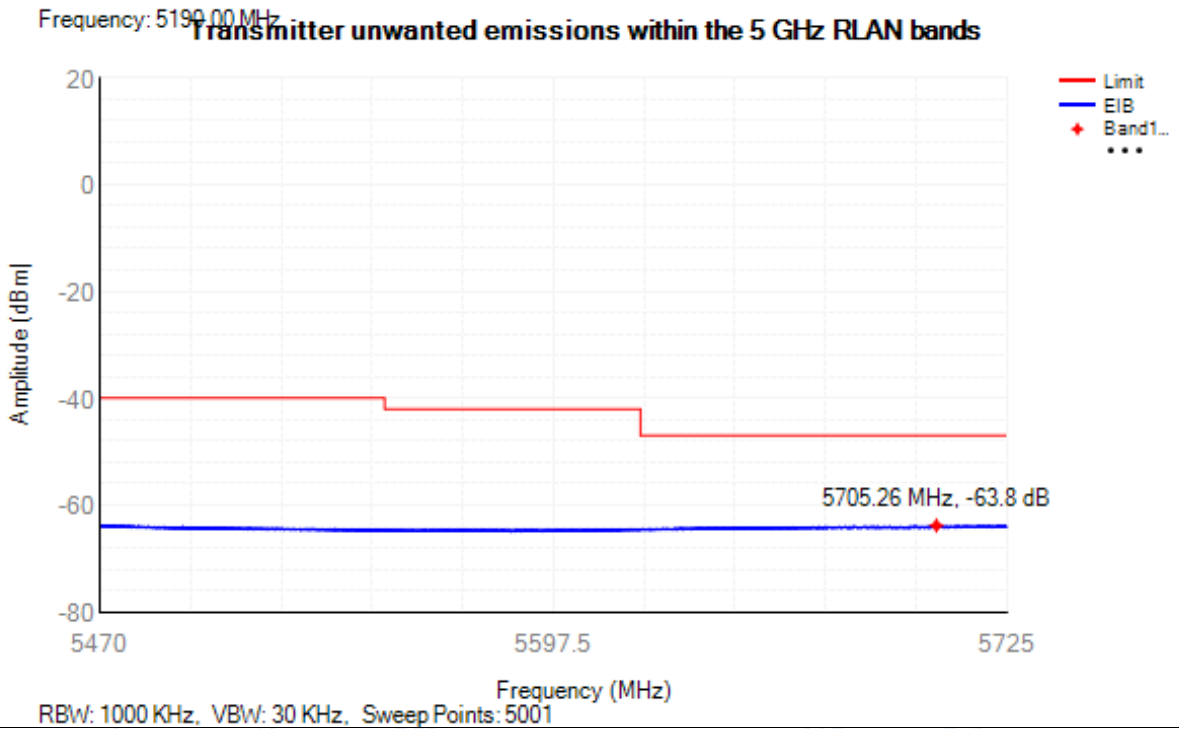

Tx. Emissions EIB NVNT ac80 5210MHz Sub Band1

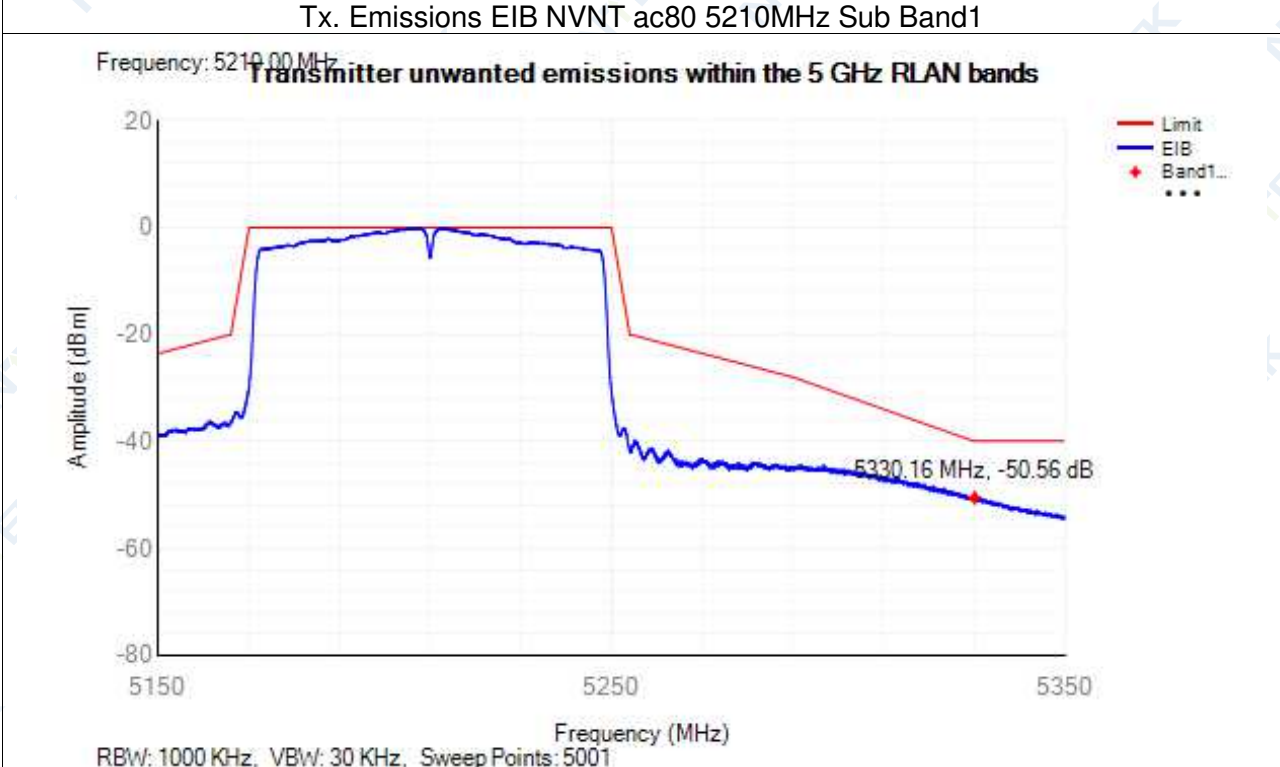


Tx. Emissions EIB NVNT ac80 5210MHz Sub Band2

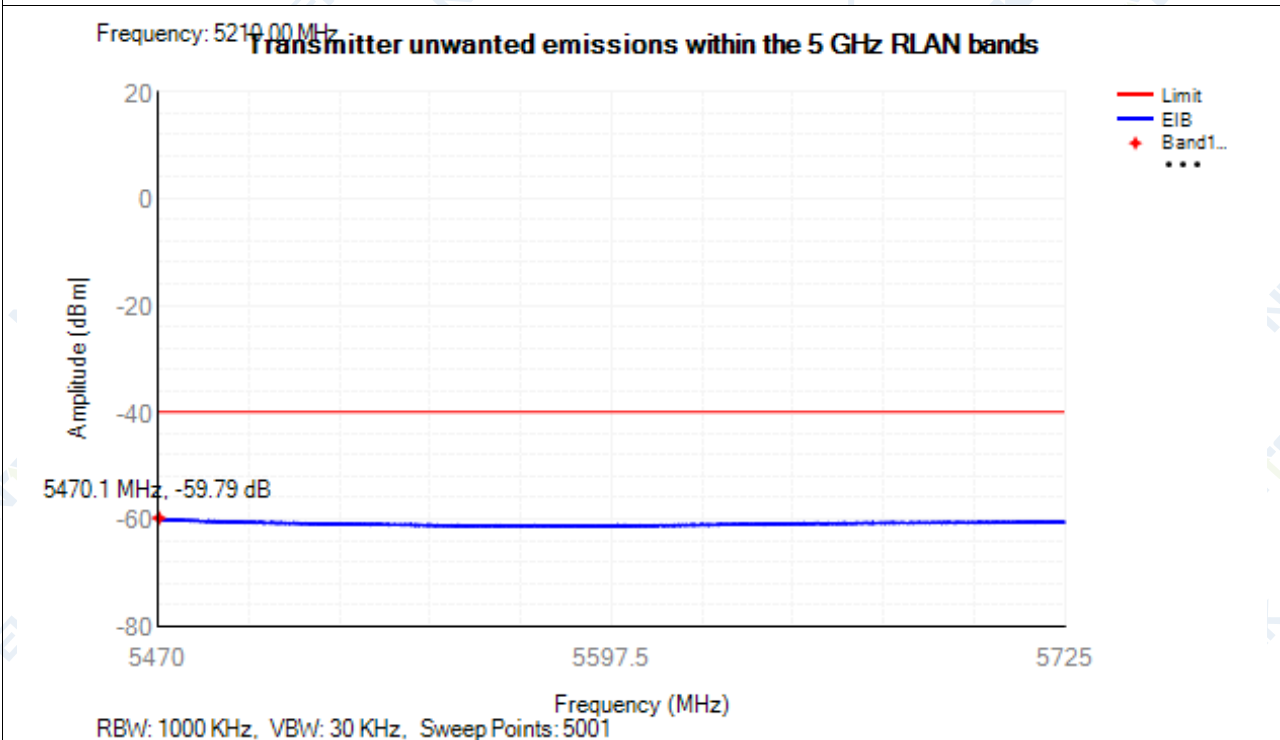


13.6 Receiver spurious emissions


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	30 -1000	901.1	-84.32	NA	-57	Pass
NVNT	a	5180	Ant1	1000 -26000	16763	-63.14	NA	-47	Pass
NVNT	n20	5180	Ant1	30 -1000	969.6	-83.76	NA	-57	Pass
NVNT	n20	5180	Ant1	1000 -26000	2474	-62.88	NA	-47	Pass
NVNT	n40	5190	Ant1	30 -1000	953	-83.76	NA	-57	Pass
NVNT	n40	5190	Ant1	1000 -26000	17653	-64.79	NA	-47	Pass
NVNT	ac20	5180	Ant1	30 -1000	238.4	-84.50	NA	-57	Pass
NVNT	ac20	5180	Ant1	1000 -26000	16675	-64.28	NA	-47	Pass
NVNT	ac40	5190	Ant1	30 -1000	977.4	-82.67	NA	-57	Pass
NVNT	ac40	5190	Ant1	1000 -26000	19173	-63.74	NA	-47	Pass
NVNT	ac80	5210	Ant1	30 -1000	946.8	-83.36	NA	-57	Pass
NVNT	ac80	5210	Ant1	1000 -26000	16756	-63.96	NA	-47	Pass

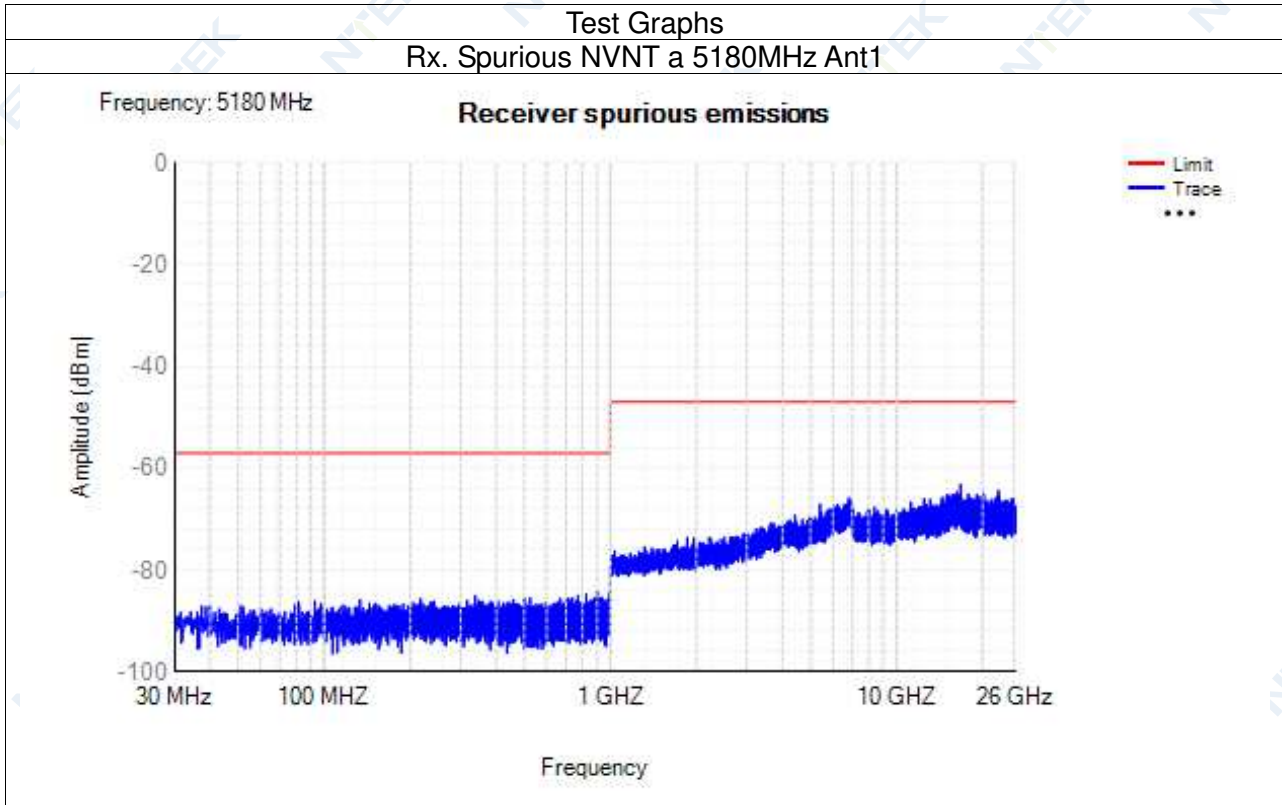


Rx. Spurious NVNT n20 5180MHz Ant1

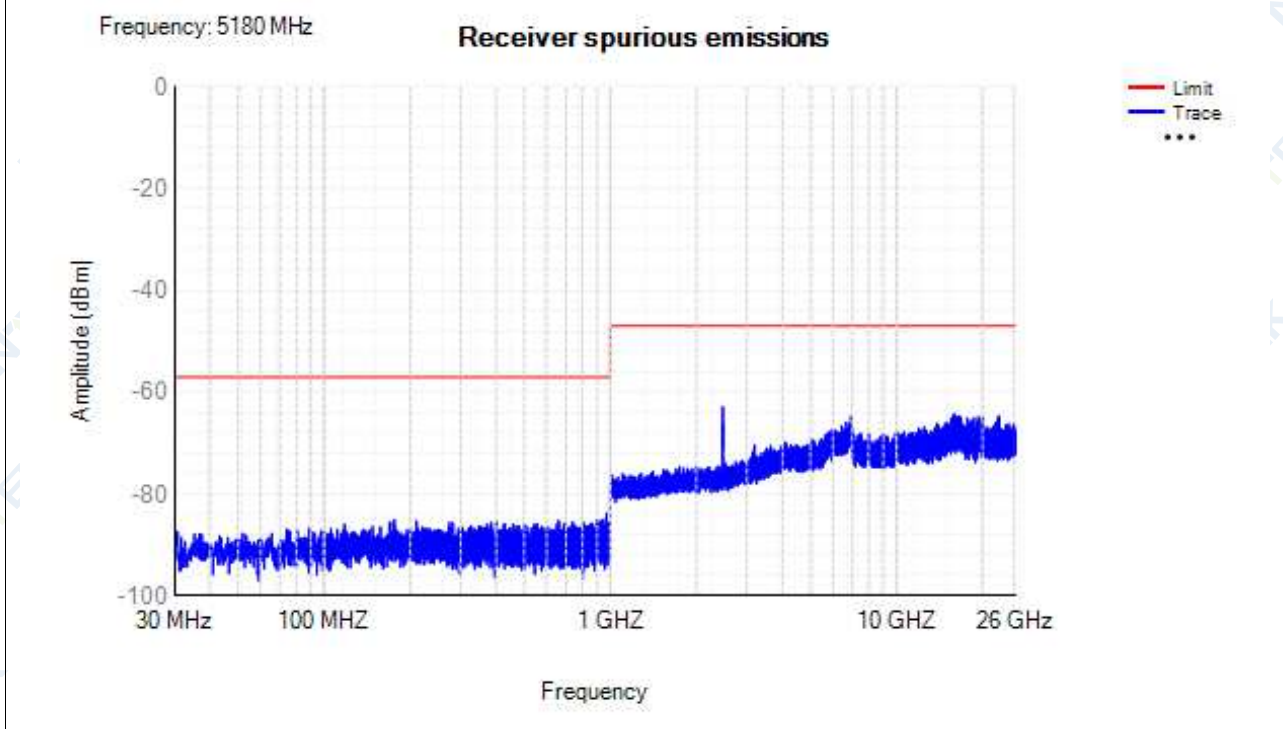


Rx. Spurious NVNT n40 5190MHz Ant1

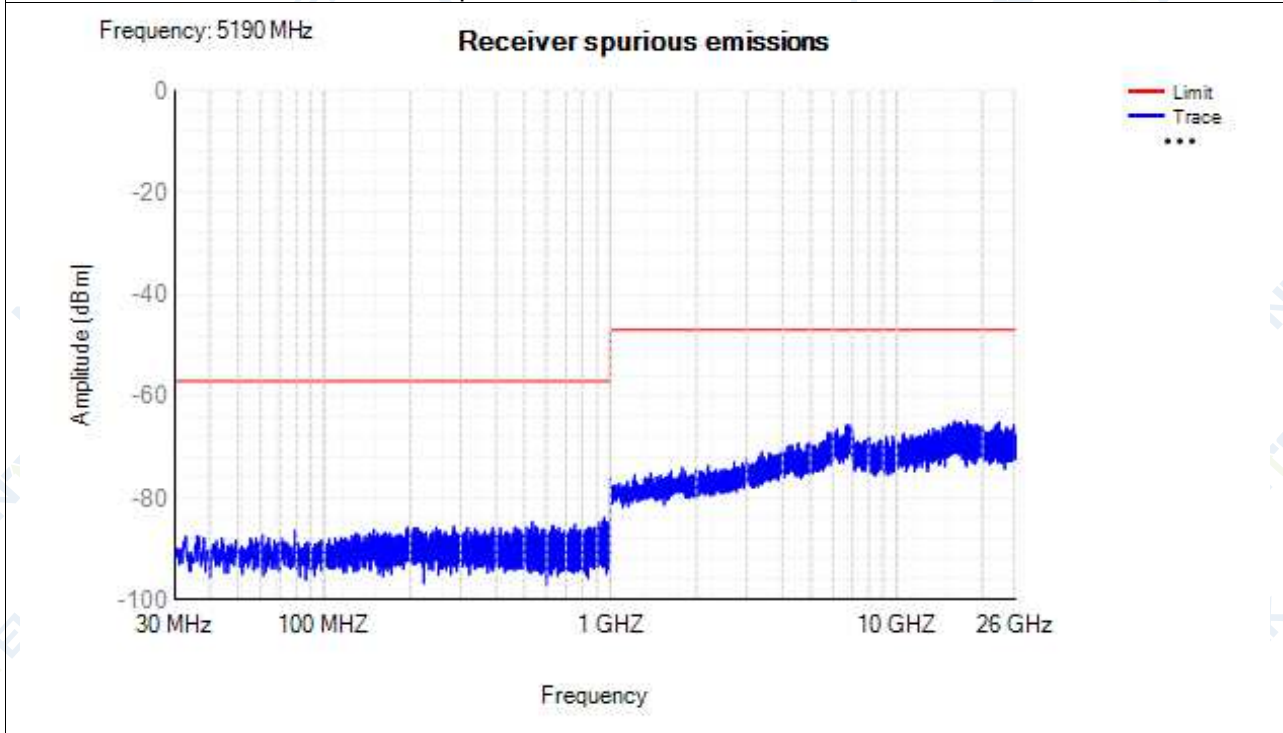


Rx. Spurious NVNT ac20 5180MHz Ant1

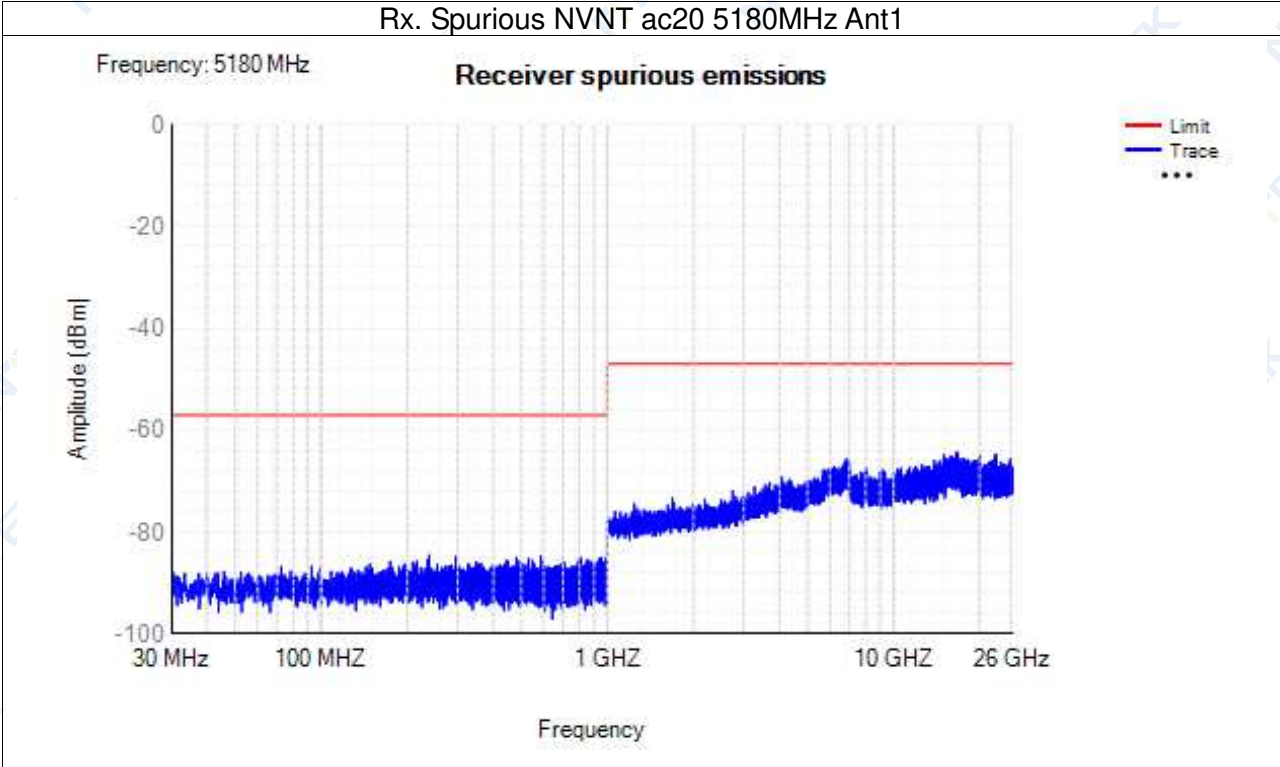

Rx. Spurious NVNT ac40 5190MHz Ant1

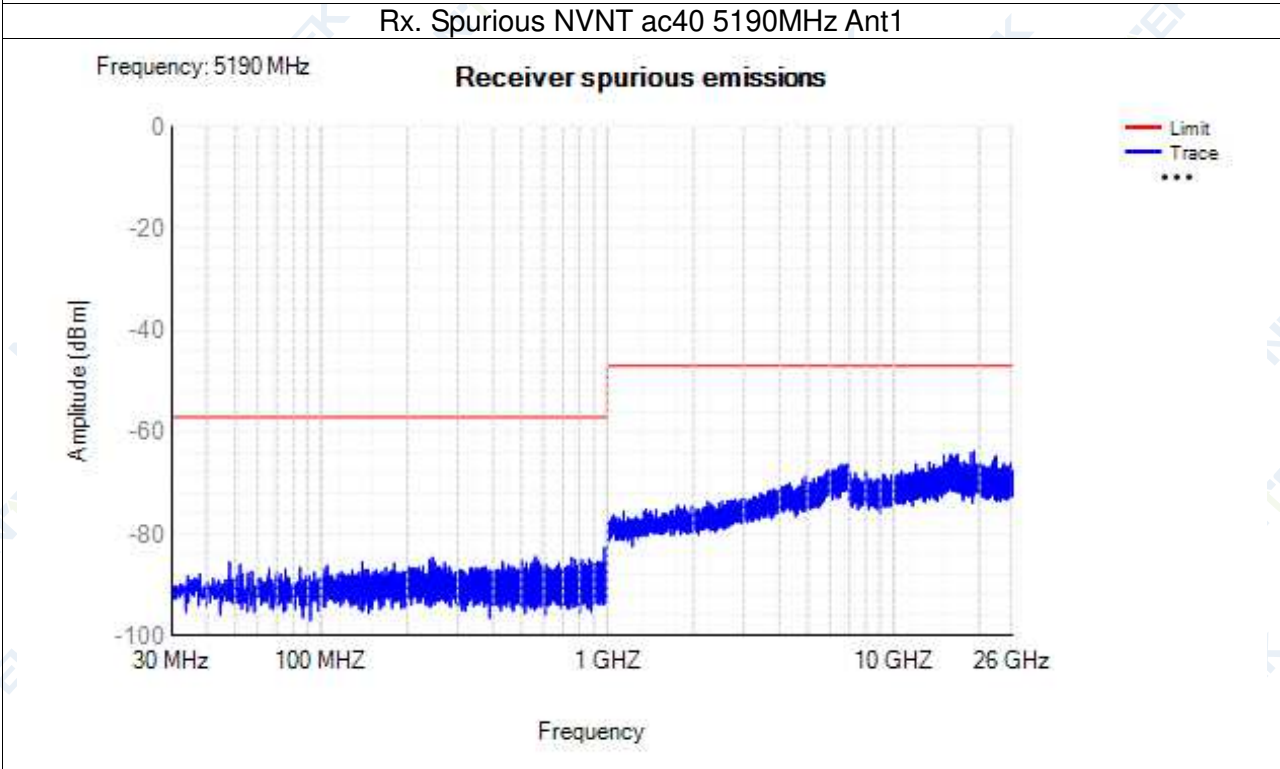


Rx. Spurious NVNT ac80 5210MHz Ant1

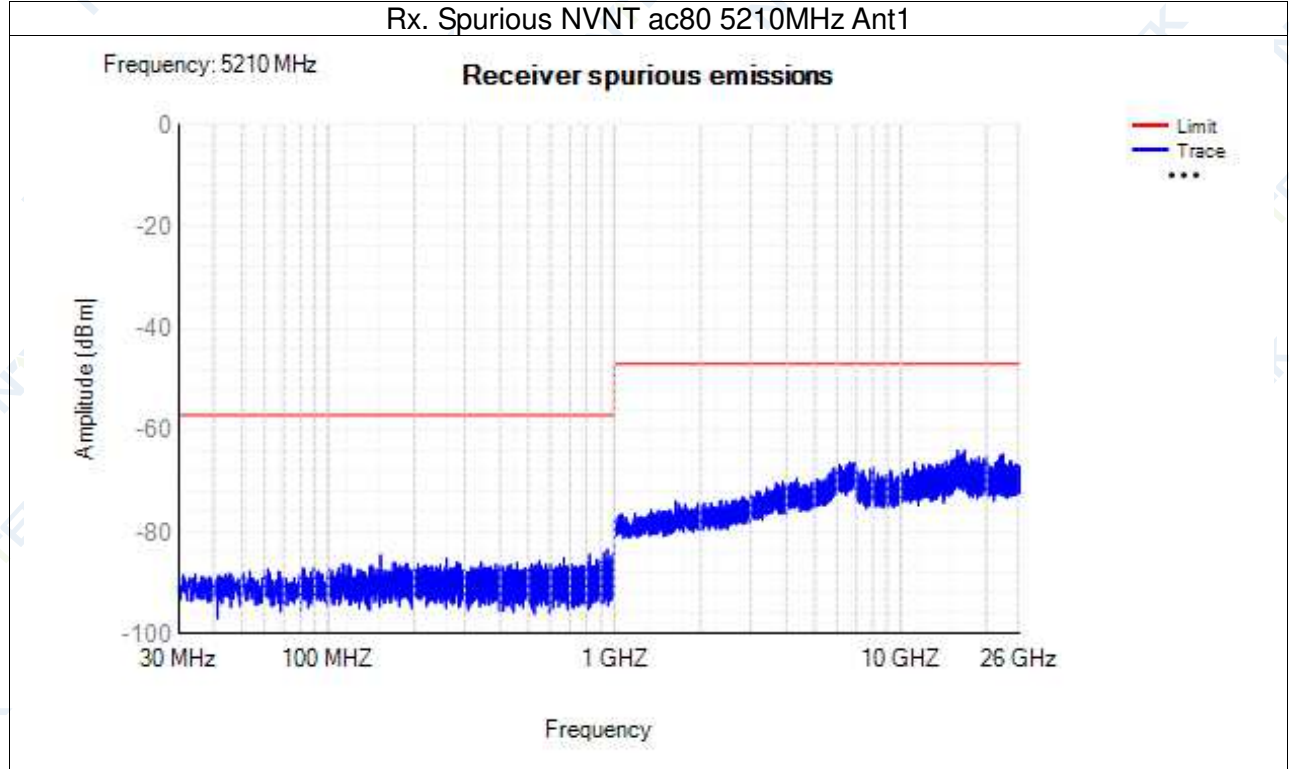

13.7 Adaptivity

Condition	Mode	Frequency (MHz)	Interfer Type	Interfer Level (dBm/MHz)	Short Control (ms)	Limit (ms)	Short Control (n)	Limit (n)	Verdict
NVNT	802.11a	5180	AWGN	-75	1.87	<=2.5	4	<=50	Pass
NVNT	802.11a	5180	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11a	5180	OFDM	-75	0.93	<=2.5	2	<=50	Pass
NVNT	802.11ac80	5210	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5210	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5210	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5290	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5290	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5290	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5530	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5530	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11ac80	5530	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11n(HT40)	5190	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11n(HT40)	5190	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	802.11n(HT40)	5190	OFDM	-75	0	<=2.5	0	<=50	Pass


Adaptivity NVNT 802.11a 5180MHz AWGN

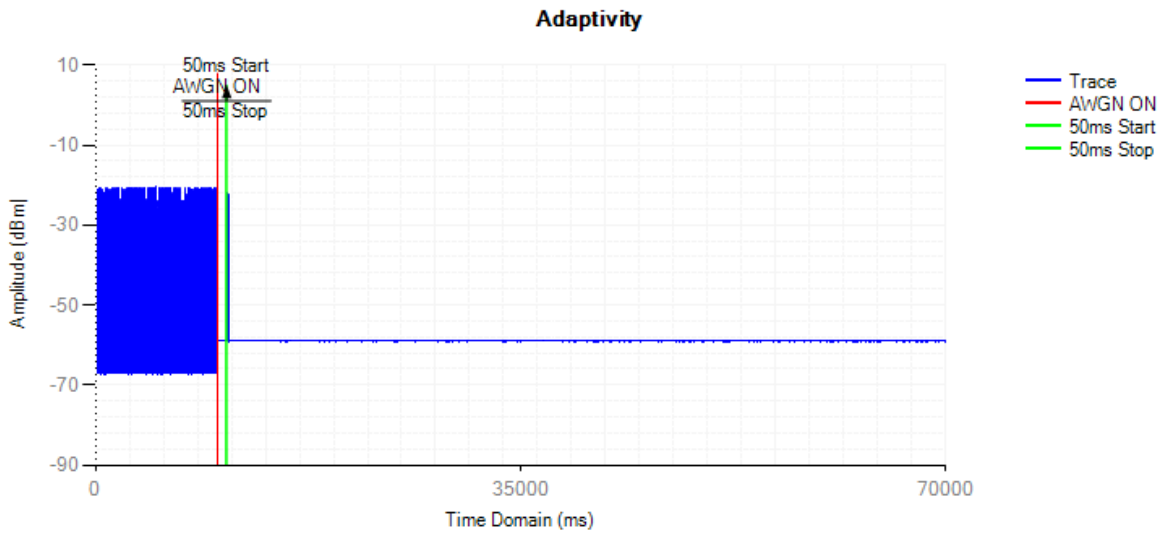




### Control Signal NVNT 802.11a 5180MHz AWGN

#### Short Control Signal

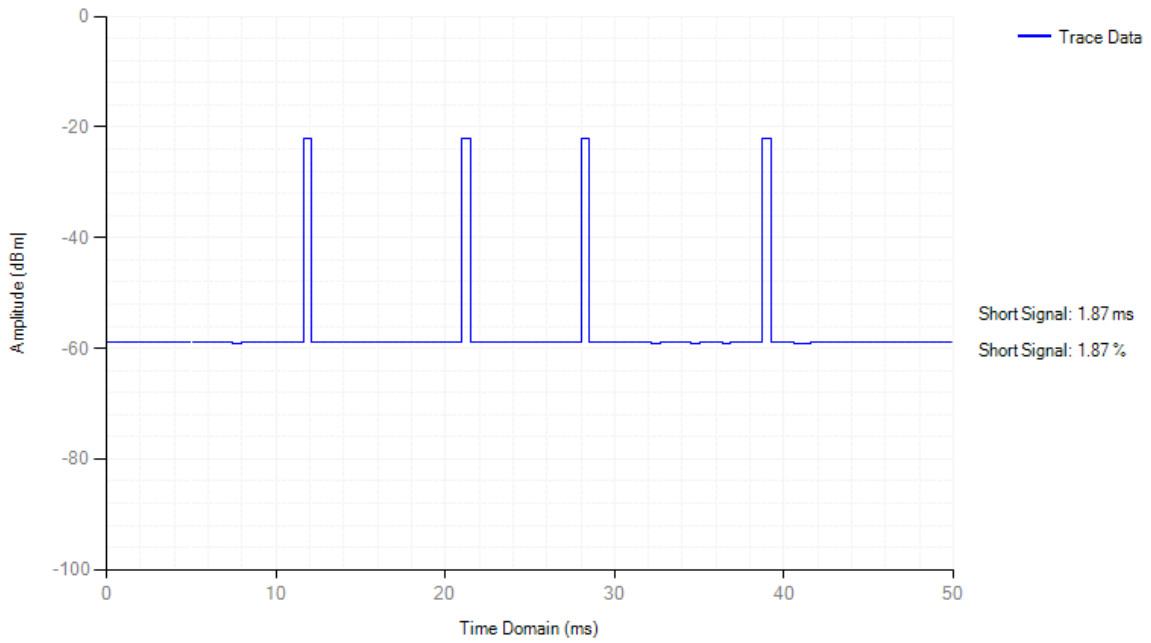


### Adaptivity NVNT 802.11a 5180MHz LTE

#### Adaptivity

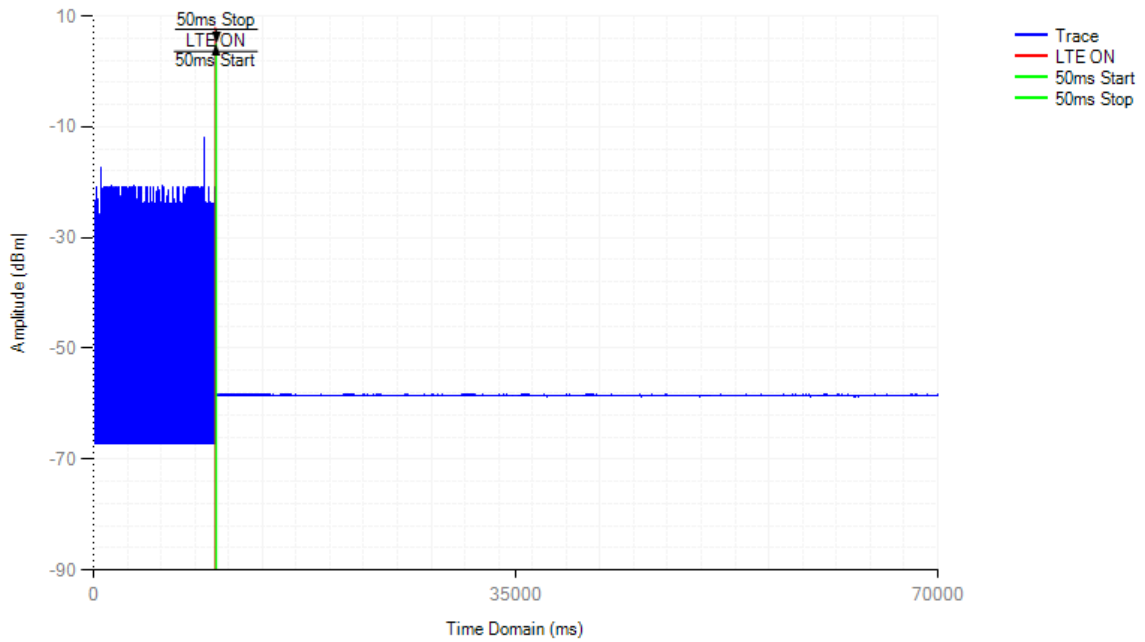


### Control Signal NVNT 802.11a 5180MHz LTE

#### Short Control Signal

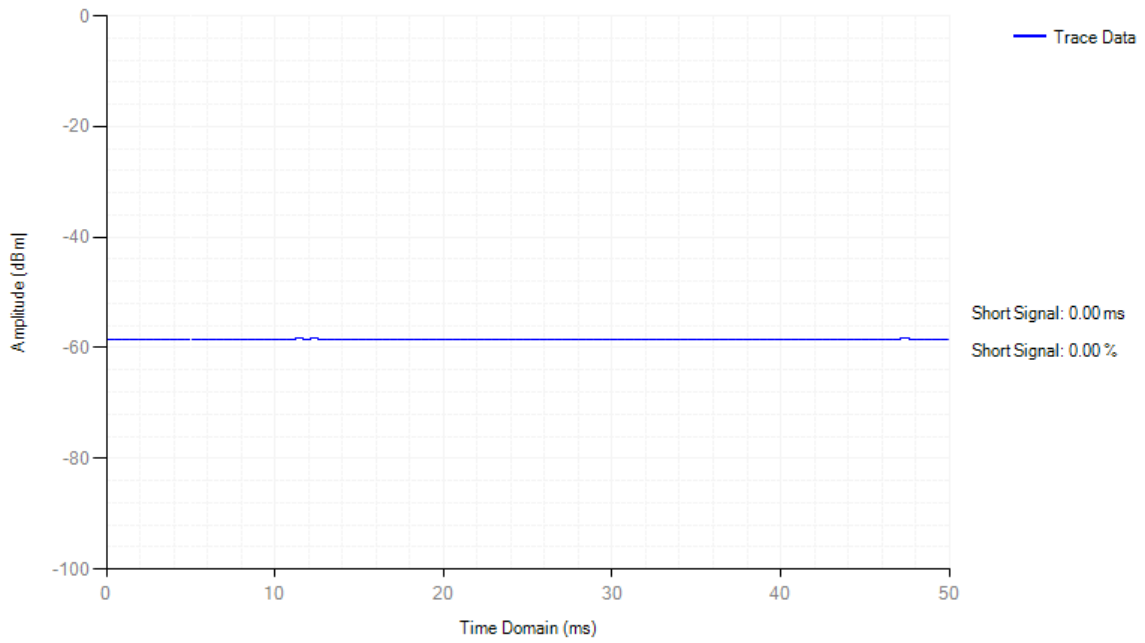


### Adaptivity NVNT 802.11a 5180MHz OFDM

#### Adaptivity

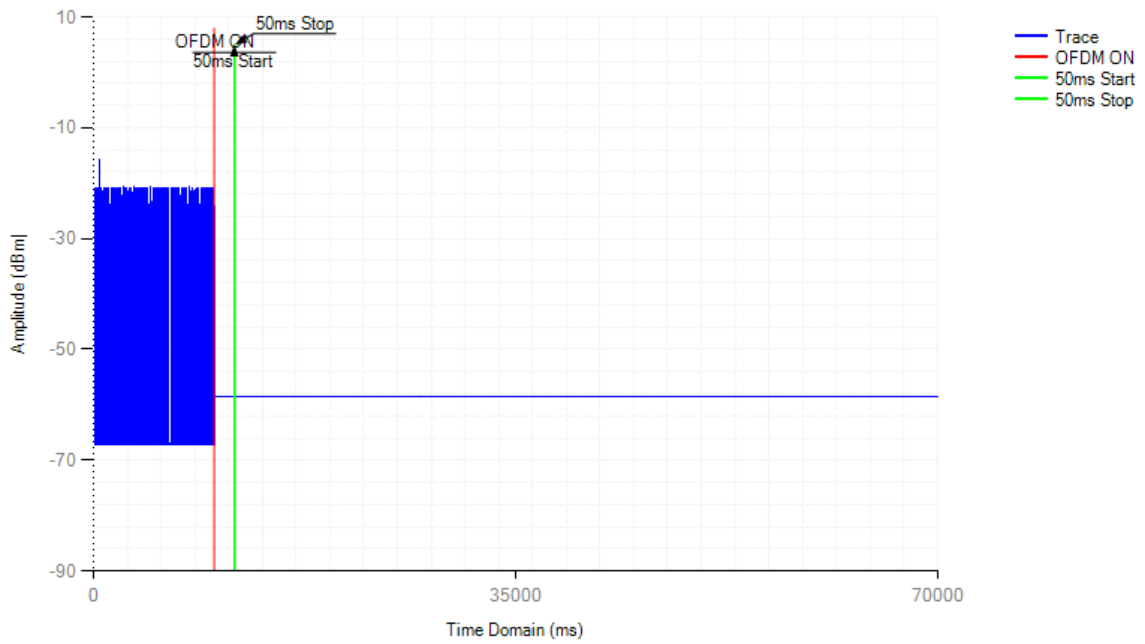


### Control Signal NVNT 802.11a 5180MHz OFDM

#### Short Control Signal

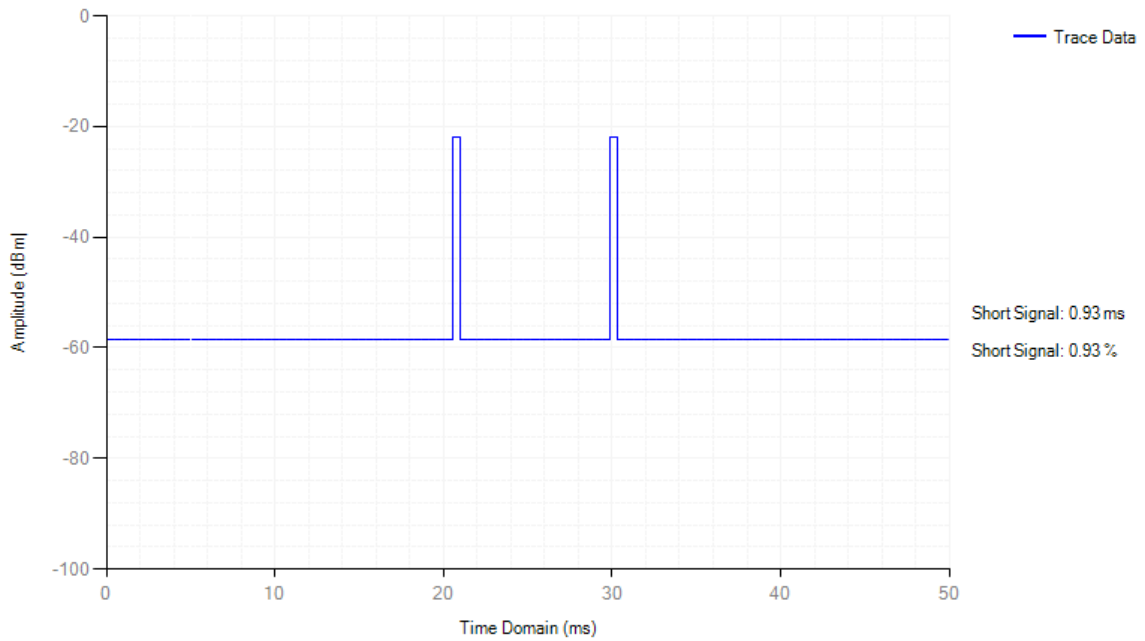


### Adaptivity NVNT 802.11ac80 5210MHz AWGN

#### Adaptivity

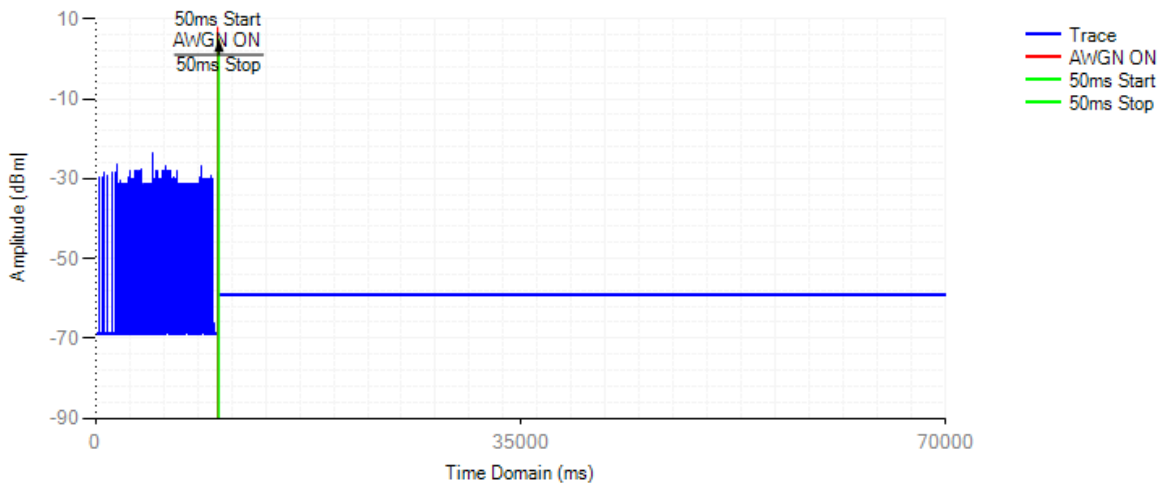


### Control Signal NVNT 802.11ac80 5210MHz AWGN

#### Short Control Signal

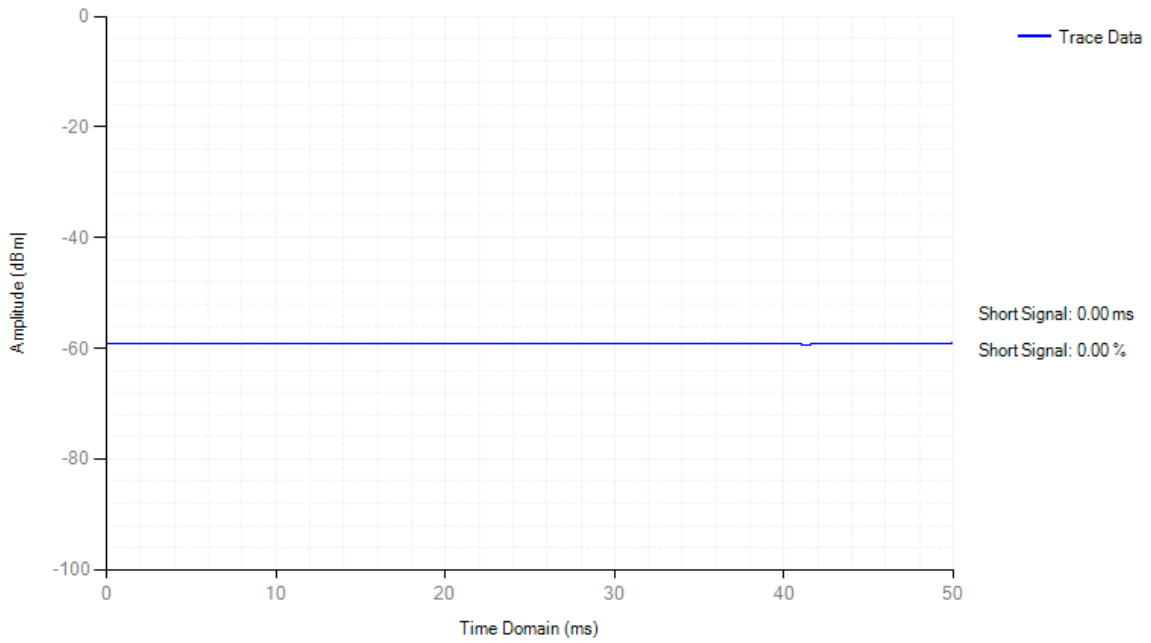


### Adaptivity NVNT 802.11ac80 5210MHz LTE

#### Adaptivity

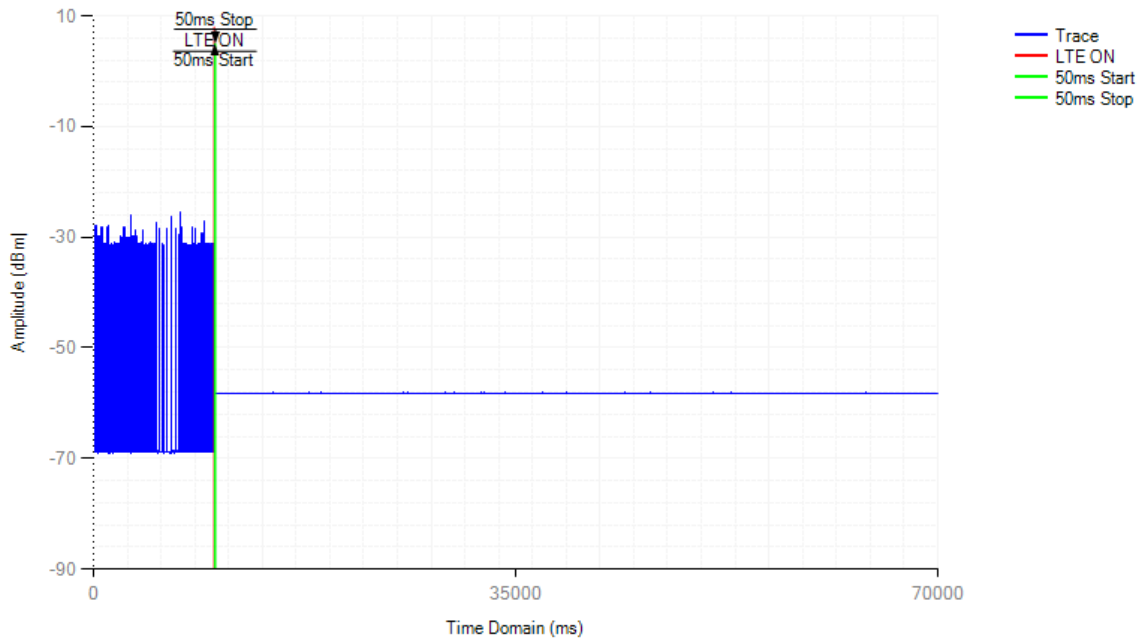


### Control Signal NVNT 802.11ac80 5210MHz LTE

#### Short Control Signal

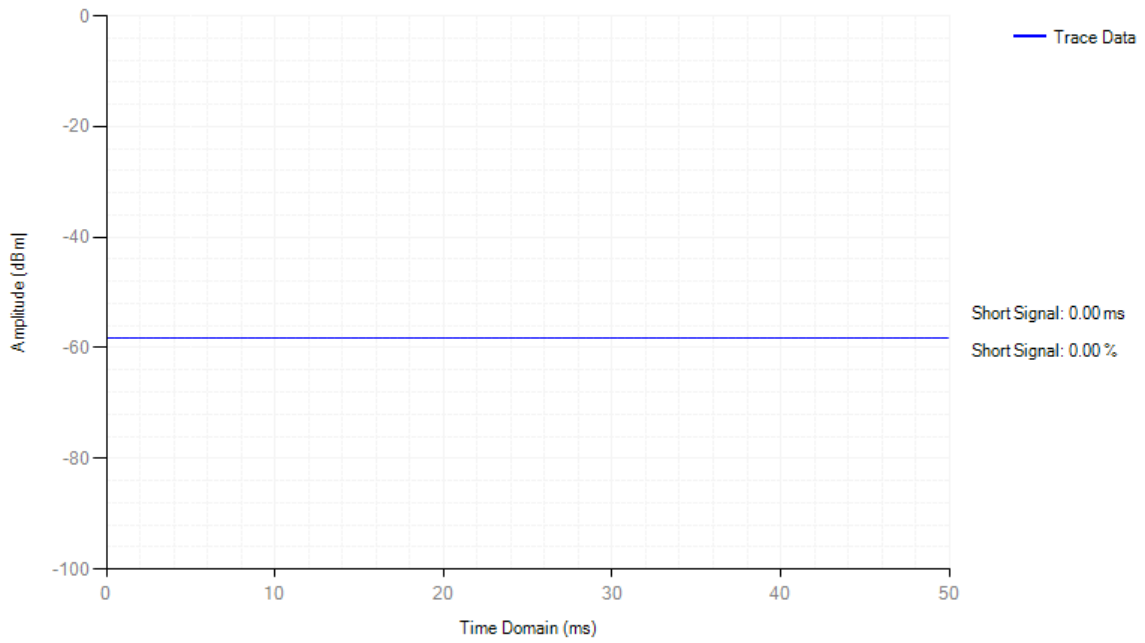


### Adaptivity NVNT 802.11ac80 5210MHz OFDM

#### Adaptivity

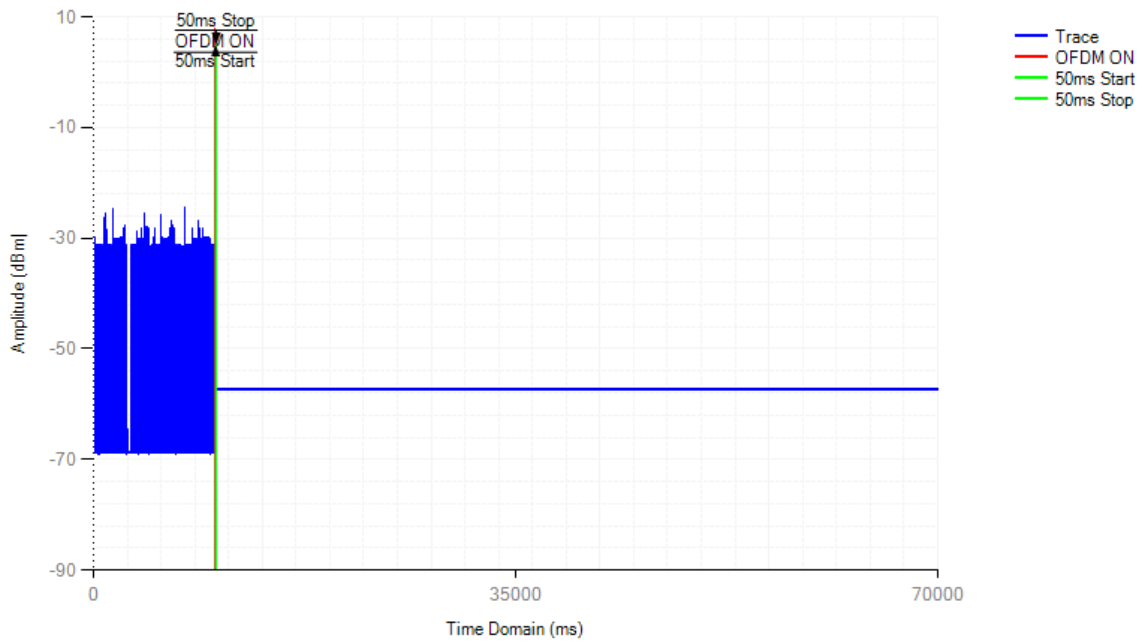


### Control Signal NVNT 802.11ac80 5210MHz OFDM

#### Short Control Signal

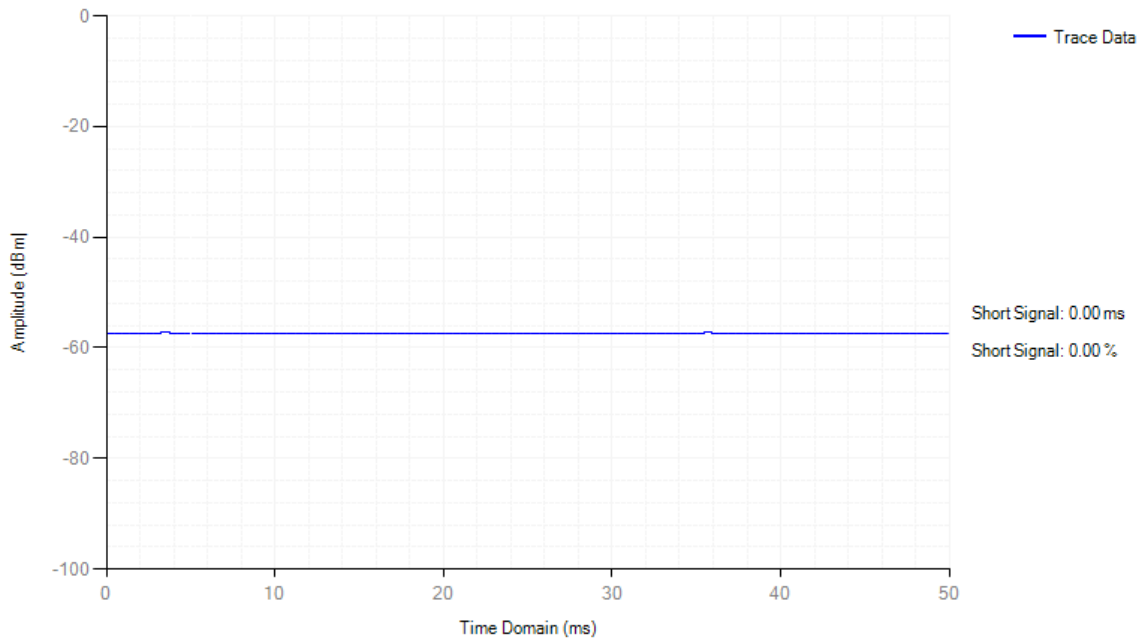


### Adaptivity NVNT 802.11ac80 5290MHz AWGN

#### Adaptivity

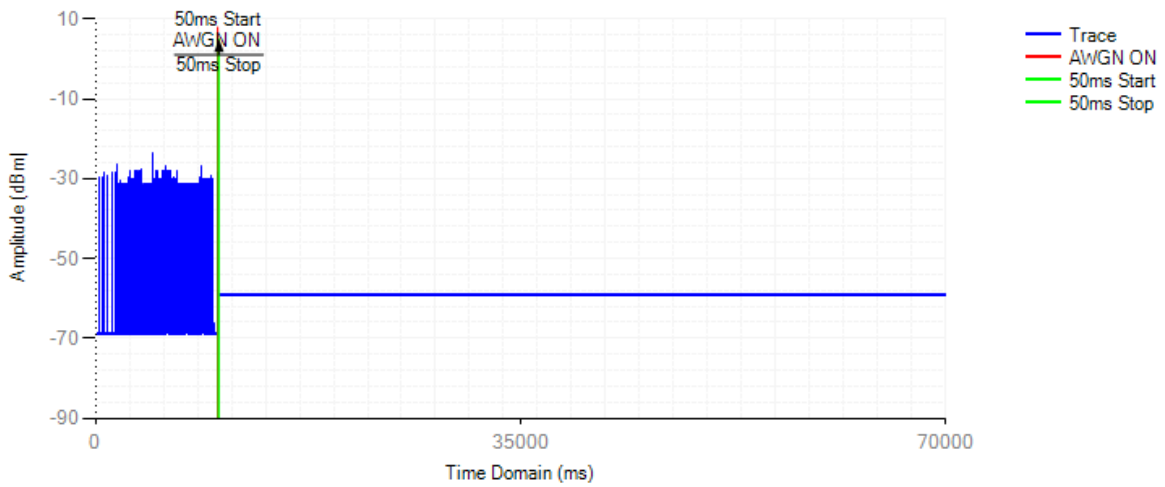


### Control Signal NVNT 802.11ac80 5290MHz AWGN

#### Short Control Signal

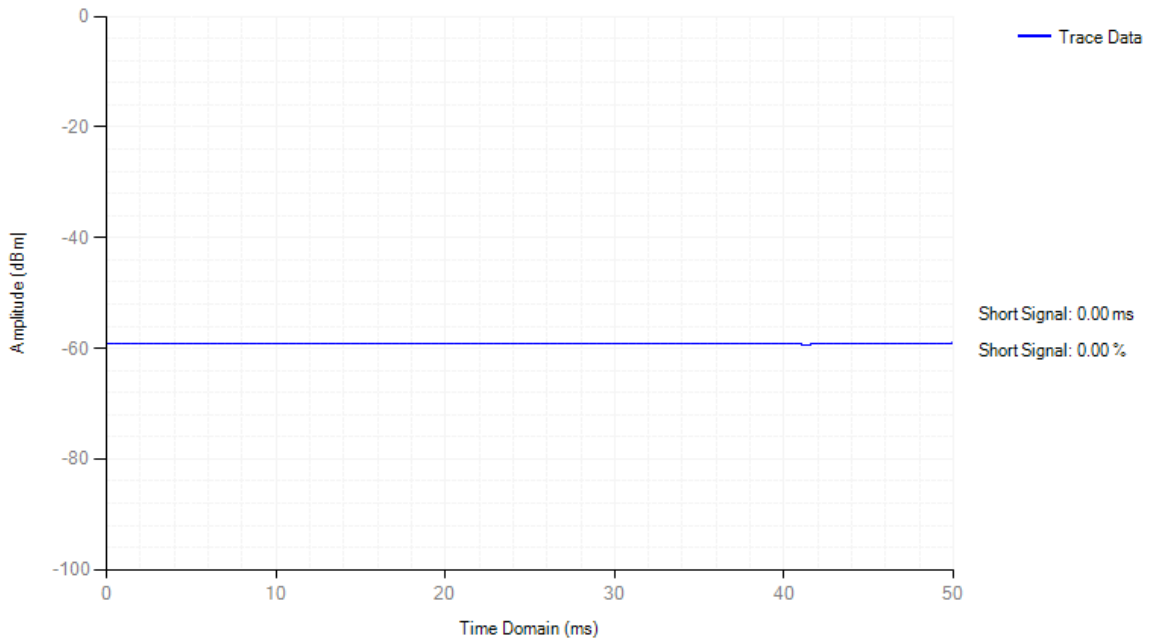


### Adaptivity NVNT 802.11ac80 5290MHz LTE

#### Adaptivity

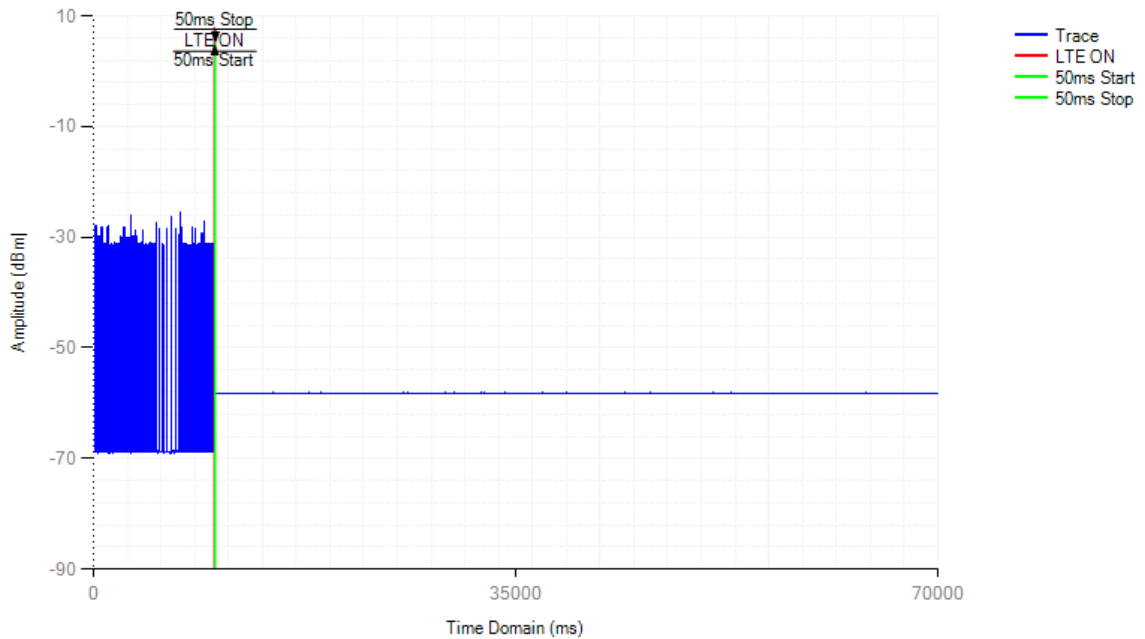


### Control Signal NVNT 802.11ac80 5290MHz LTE

#### Short Control Signal

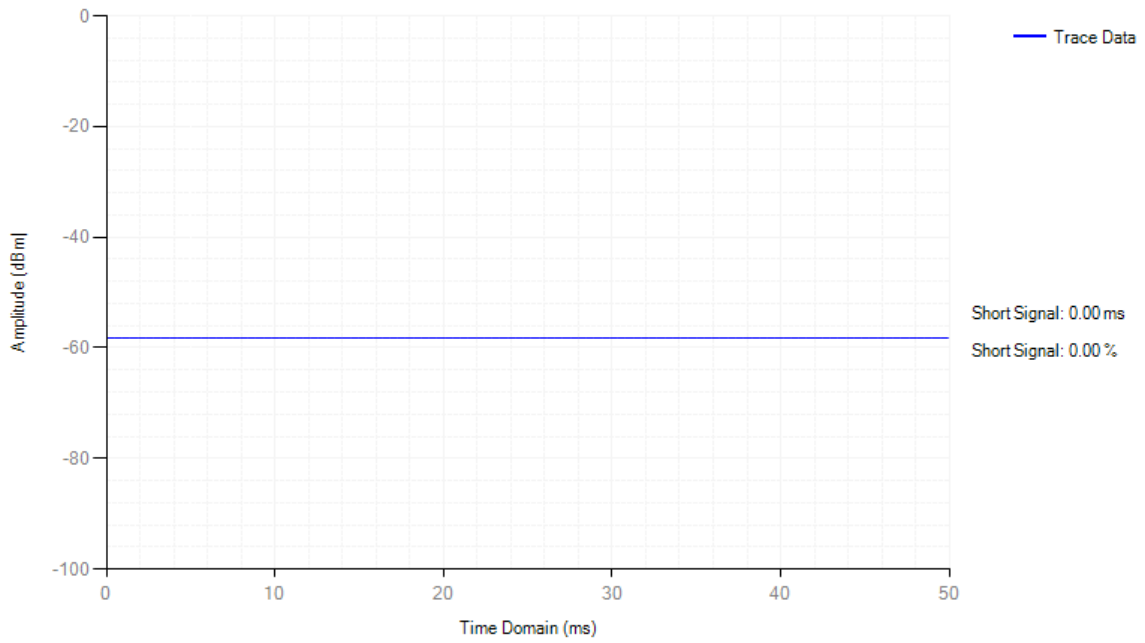

### Adaptivity NVNT 802.11ac80 5290MHz OFDM


#### Adaptivity

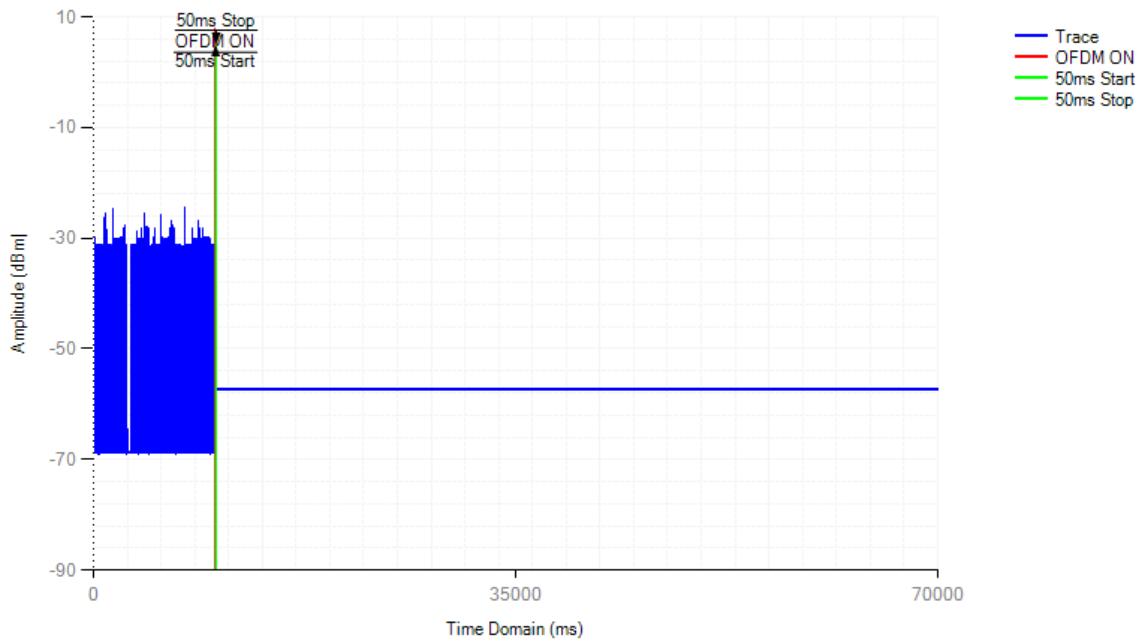




### Control Signal NVNT 802.11ac80 5290MHz OFDM

#### Short Control Signal

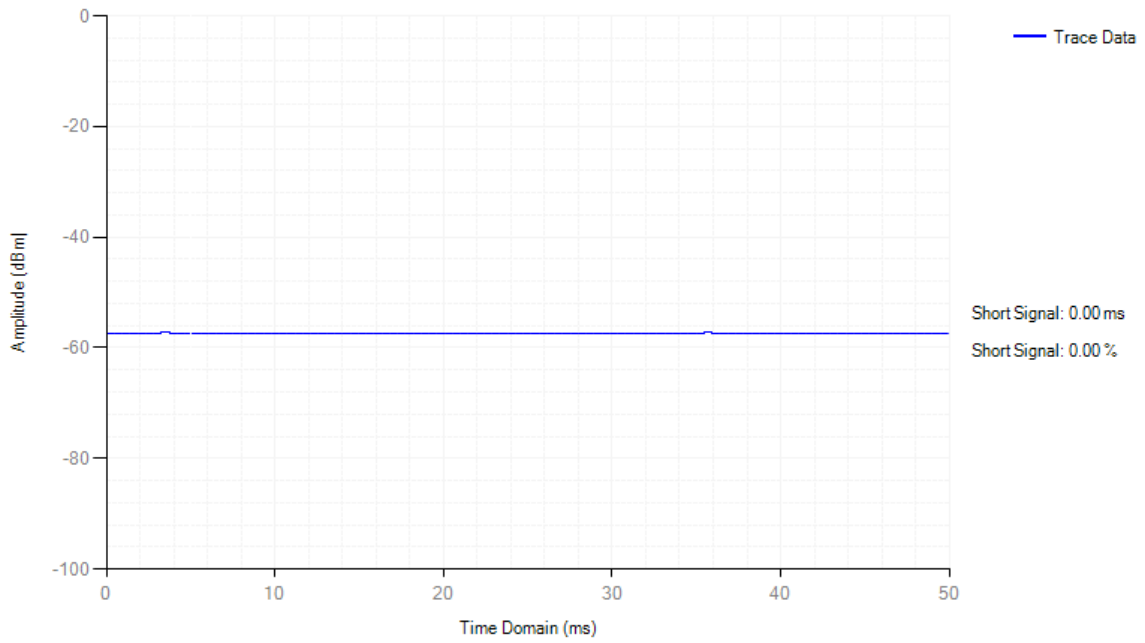


### Adaptivity NVNT 802.11ac80 5530MHz AWGN

#### Adaptivity

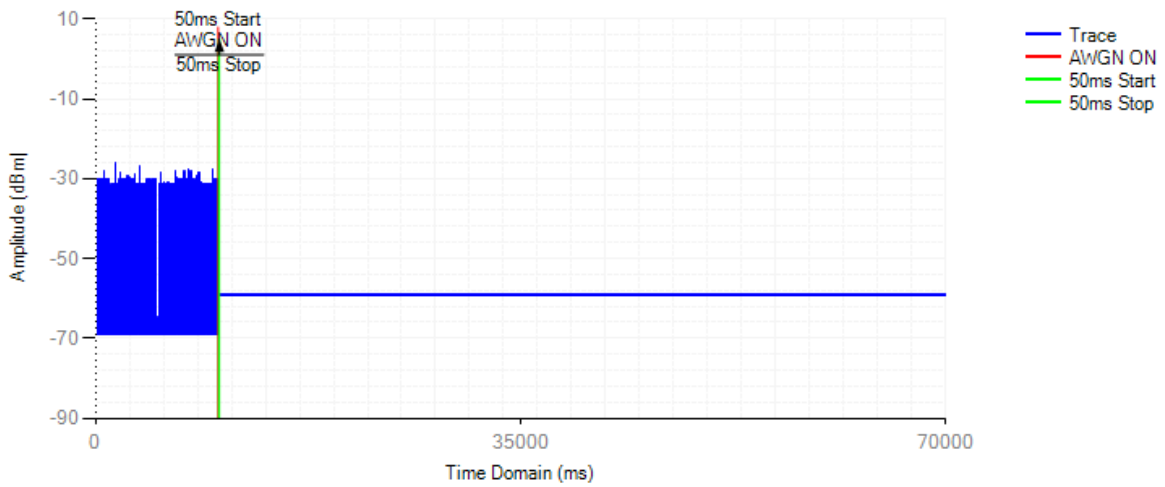


### Control Signal NVNT 802.11ac80 5530MHz AWGN

#### Short Control Signal

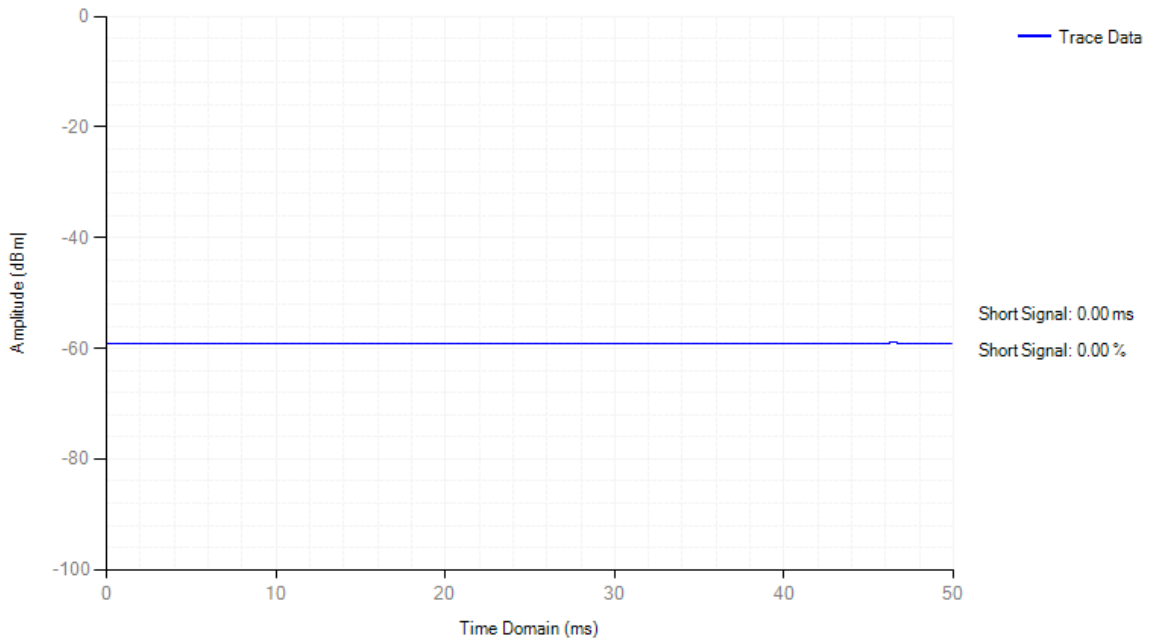


### Adaptivity NVNT 802.11ac80 5530MHz LTE

#### Adaptivity

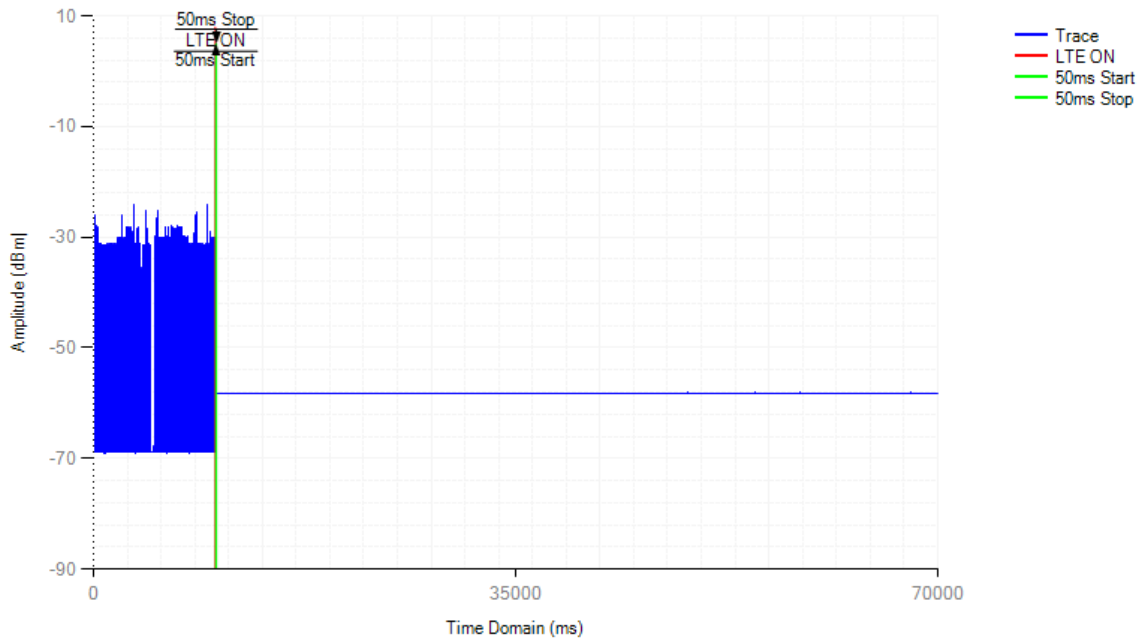


### Control Signal NVNT 802.11ac80 5530MHz LTE

#### Short Control Signal

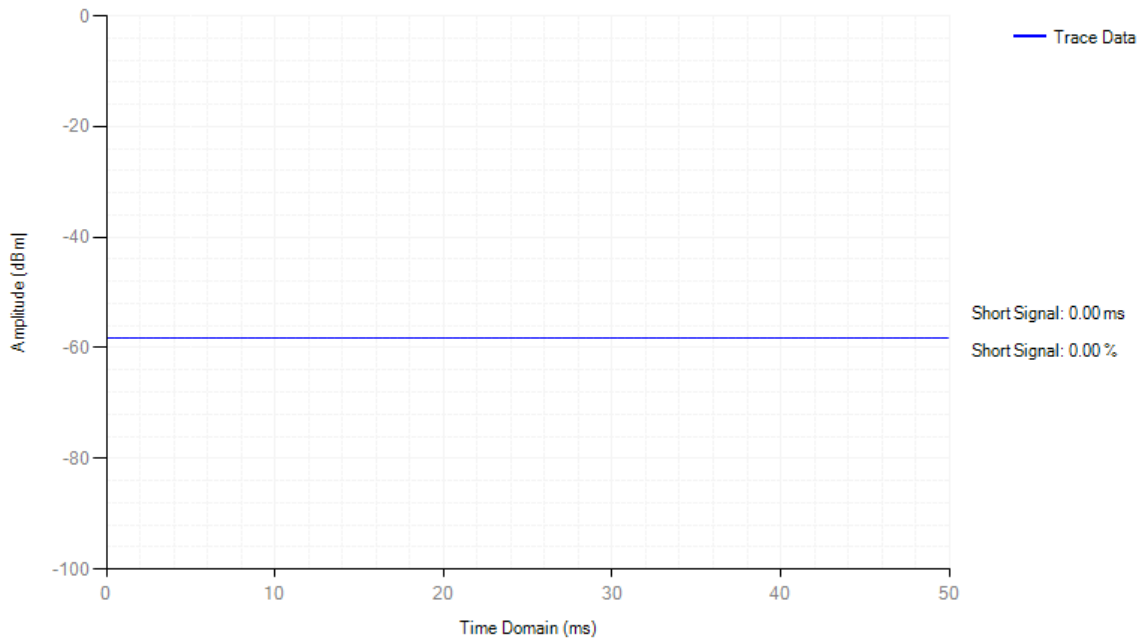


### Adaptivity NVNT 802.11ac80 5530MHz OFDM

#### Adaptivity

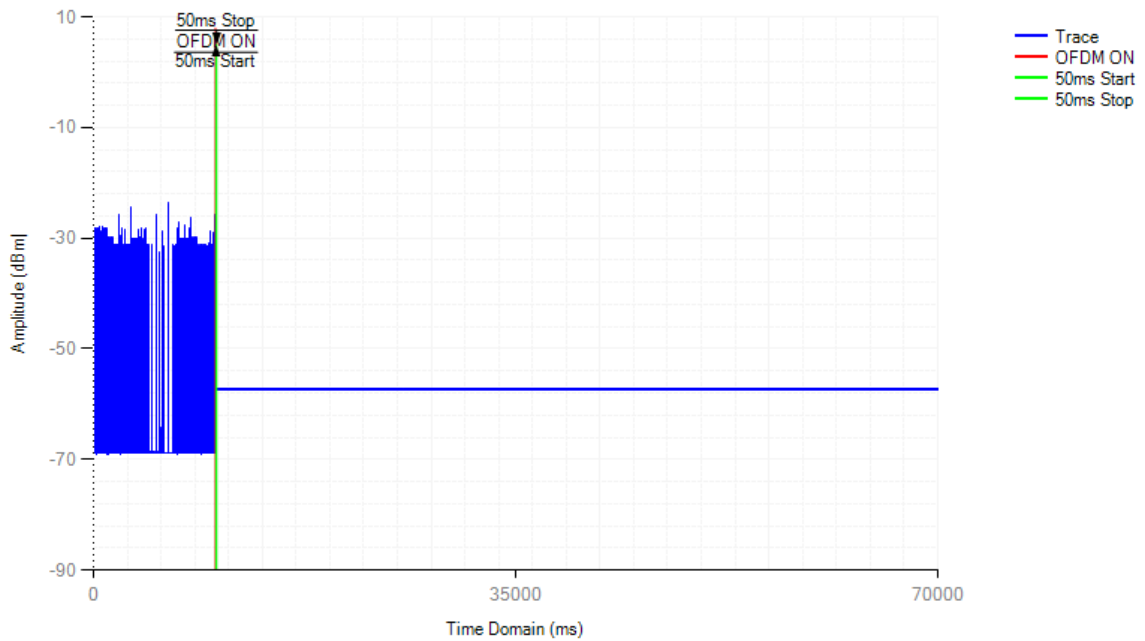


### Control Signal NVNT 802.11ac80 5530MHz OFDM

#### Short Control Signal

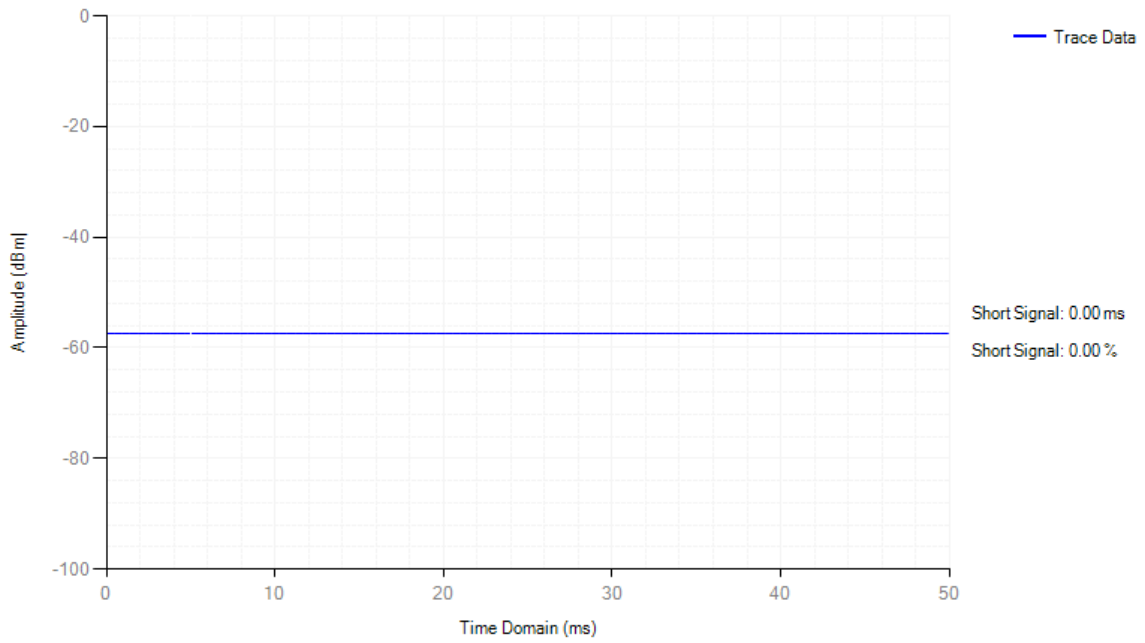


### Adaptivity NVNT 802.11n(HT40) 5190MHz AWGN

#### Adaptivity

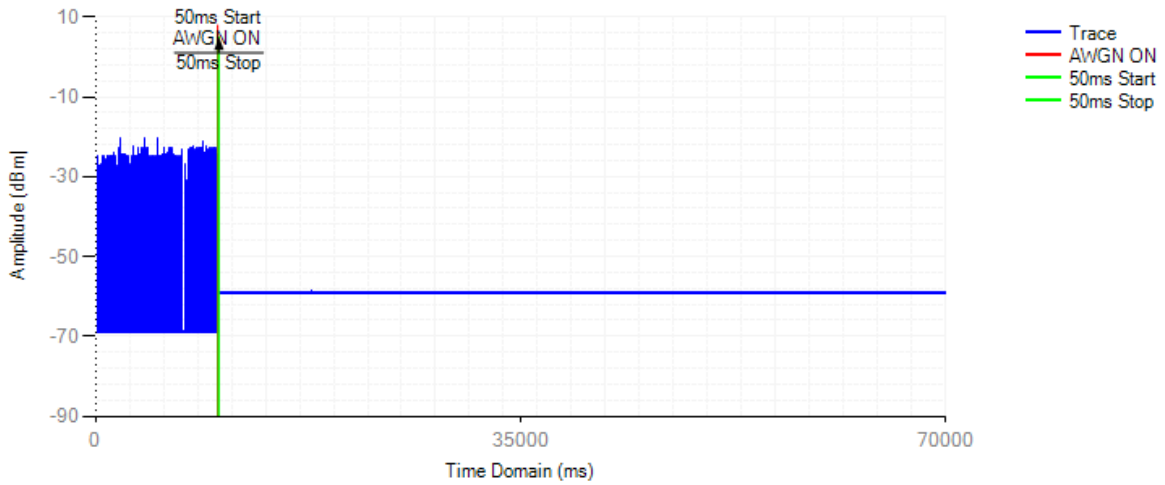


### Control Signal NVNT 802.11n(HT40) 5190MHz AWGN

#### Short Control Signal

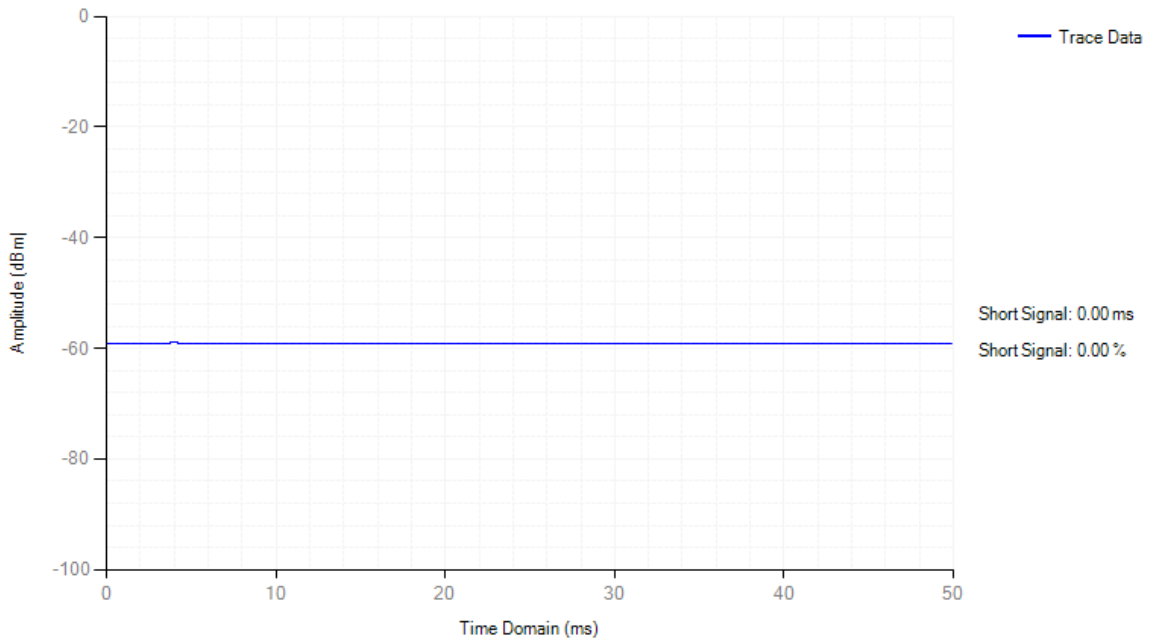


### Adaptivity NVNT 802.11n(HT40) 5190MHz LTE

#### Adaptivity

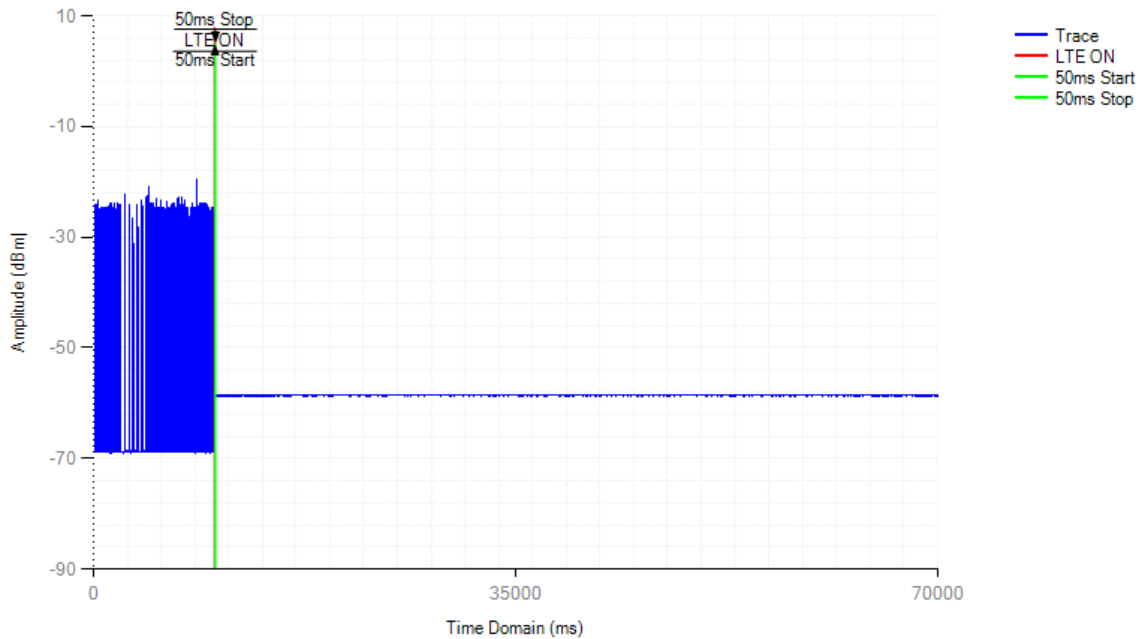


### Control Signal NVNT 802.11n(HT40) 5190MHz LTE

#### Short Control Signal

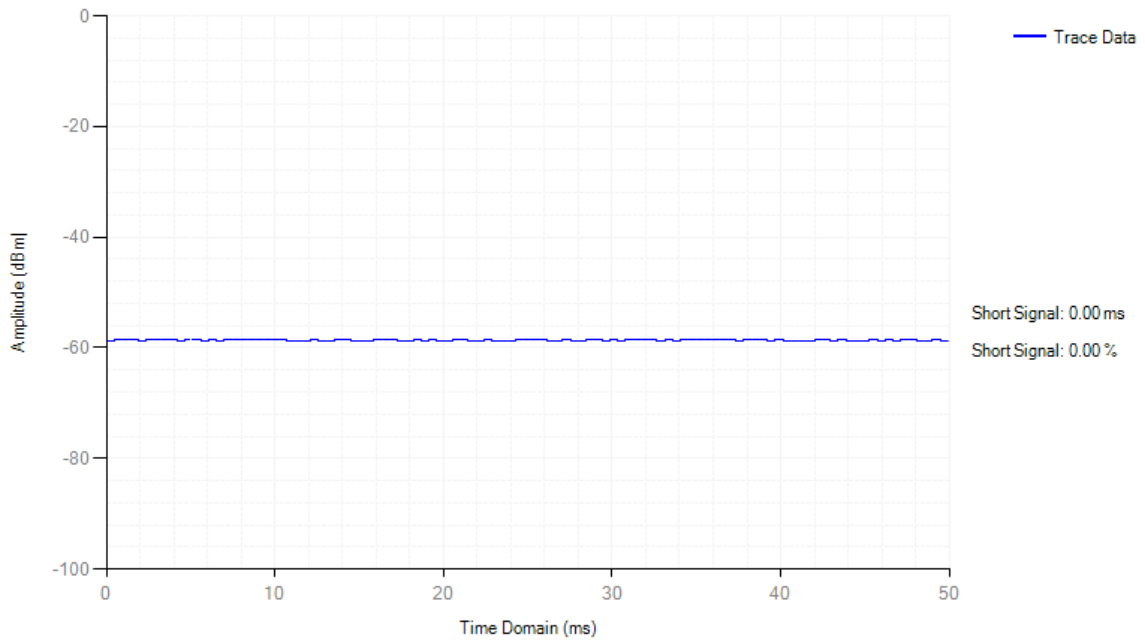


### Adaptivity NVNT 802.11n(HT40) 5190MHz OFDM

#### Adaptivity

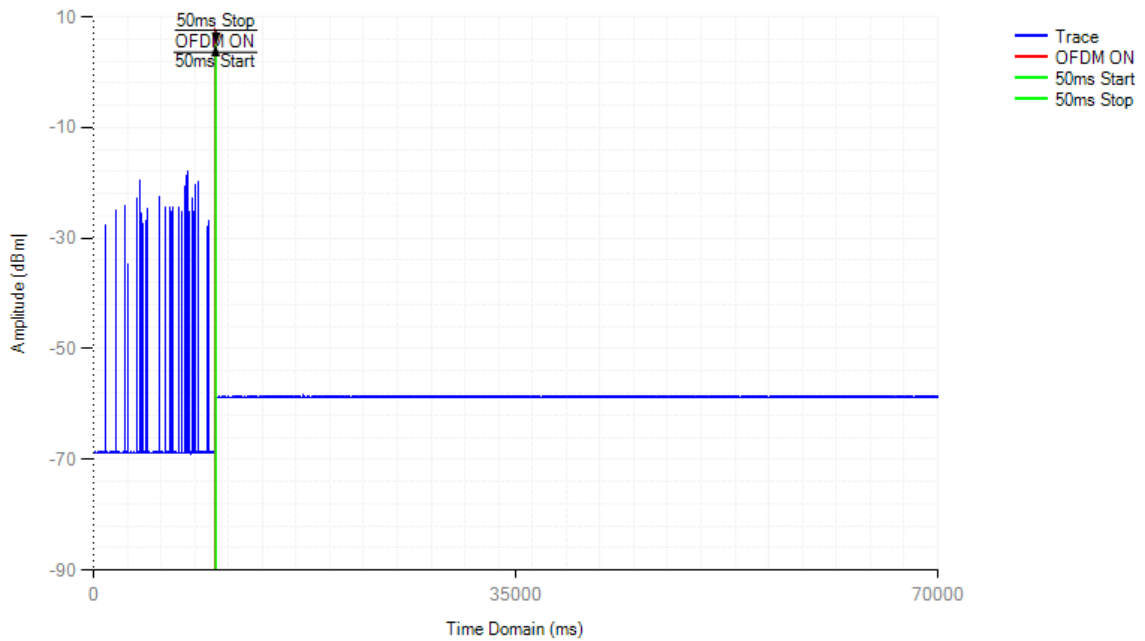

Control Signal NVNT 802.11n(HT40) 5190MHz OFDM

Short Control Signal

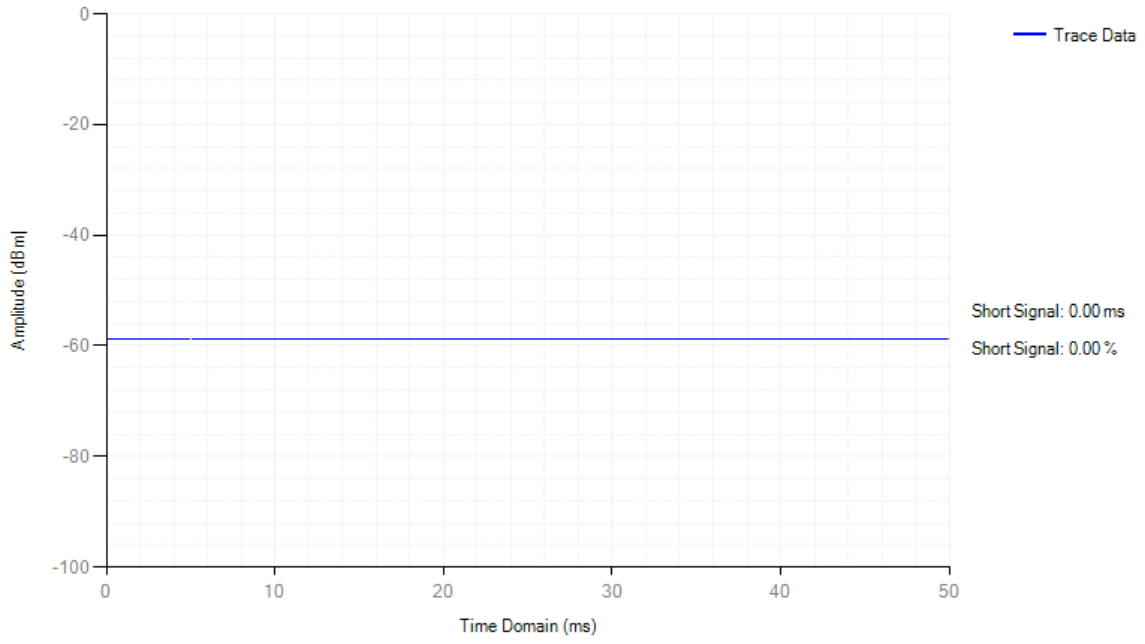


13.8 Adaptivity COT Channel Occupancy Time

Condition	Mode	Frequency (MHz)	Priority Class	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NVNT	802.11a	5180	1	0.838	<=6	0.043	>0.027	Pass
NVNT	802.11ac80	5210	3	0.41	<=4	0.033	>0.027	Pass
NVNT	802.11ac80	5290	3	0.41	<=4	0.033	>0.027	Pass
NVNT	802.11ac80	5530	2	0.41	<=6	0.035	>0.027	Pass
NVNT	802.11n(HT40)	5190	2	0.168	<=6	0.035	>0.027	Pass


COT NVNT 802.11a 5180MHz

Channel Occupation Time

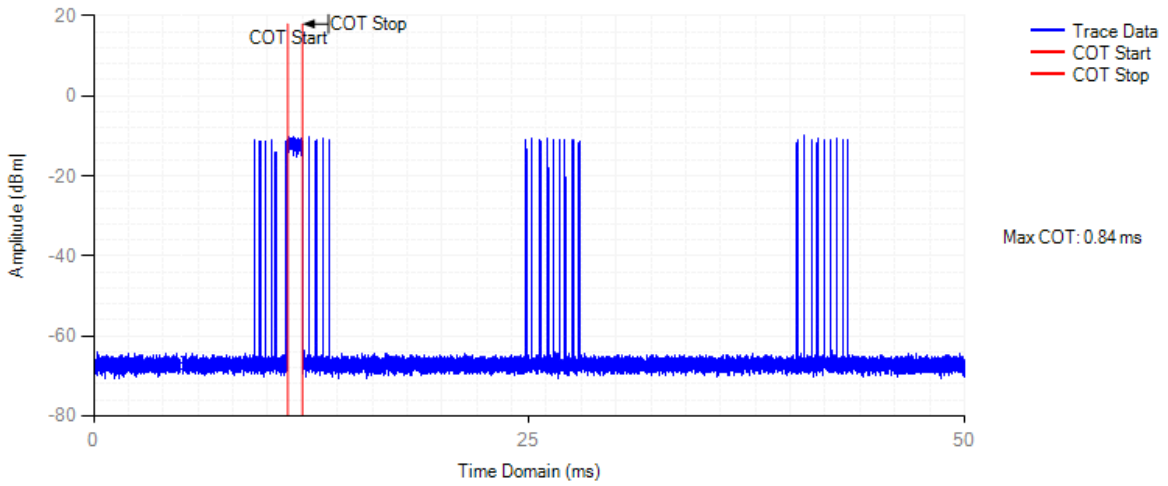

Idle NVNT 802.11a 5180MHz


Channel Occupation Time

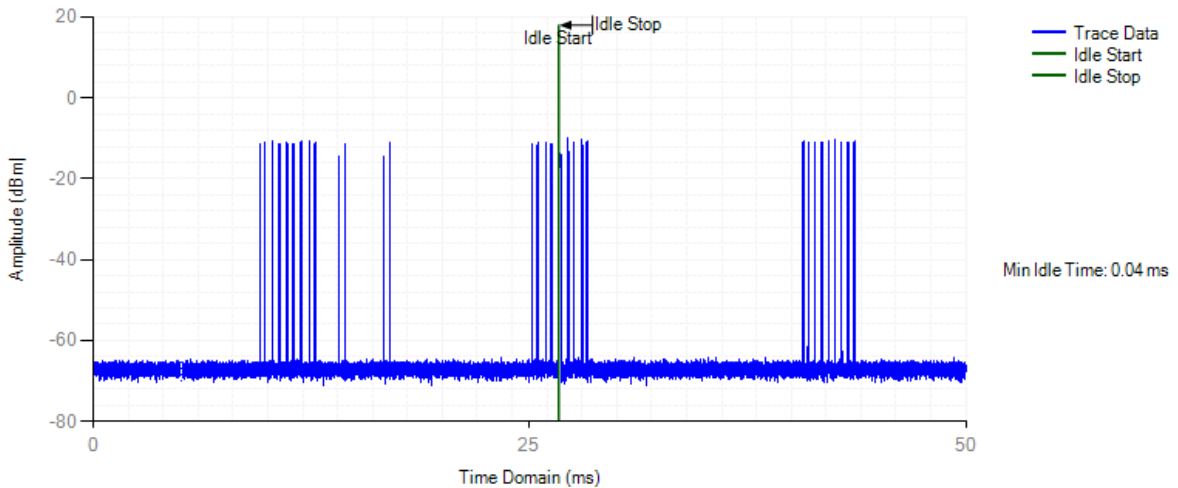




### COT NVNT 802.11ac80 5210MHz

#### Channel Occupation Time

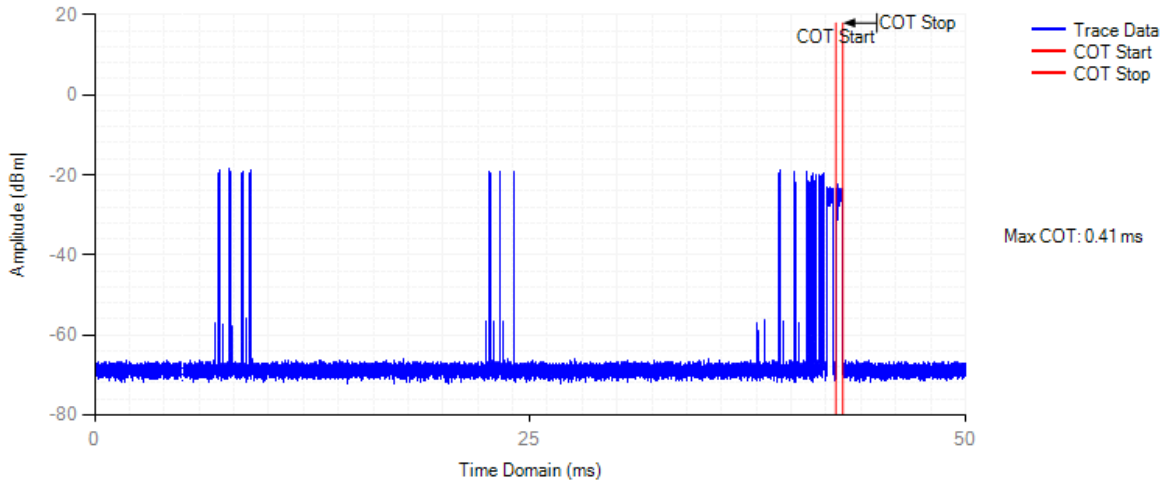


### Idle NVNT 802.11ac80 5210MHz

#### Channel Occupation Time

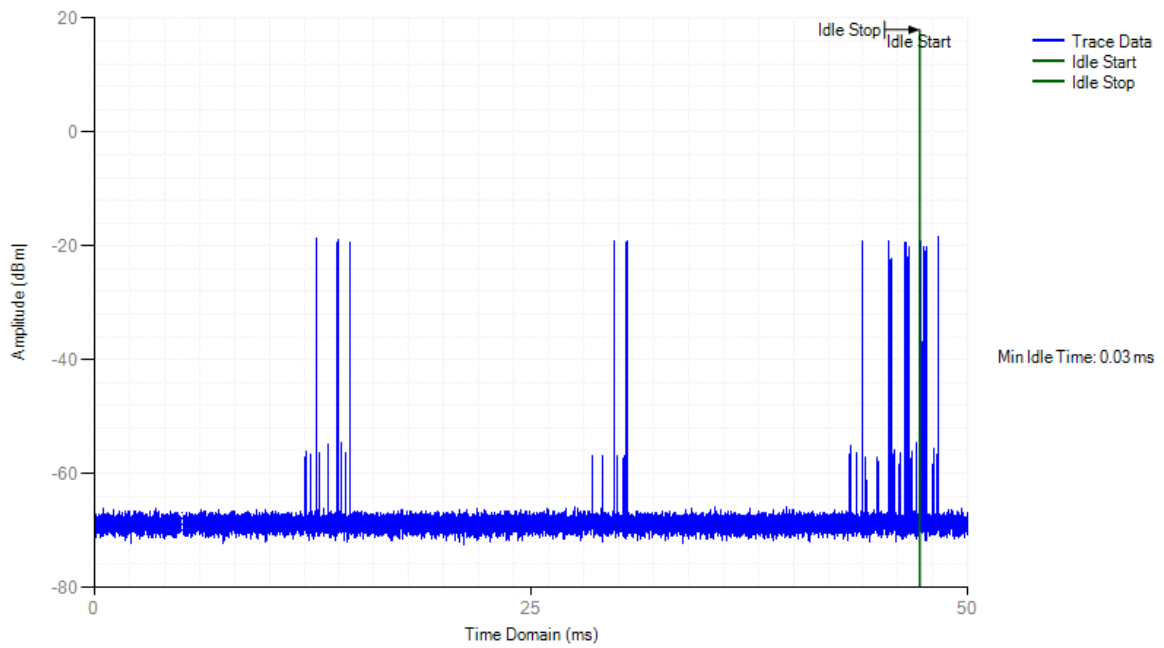


### COT NVNT 802.11ac80 5290MHz

#### Channel Occupation Time

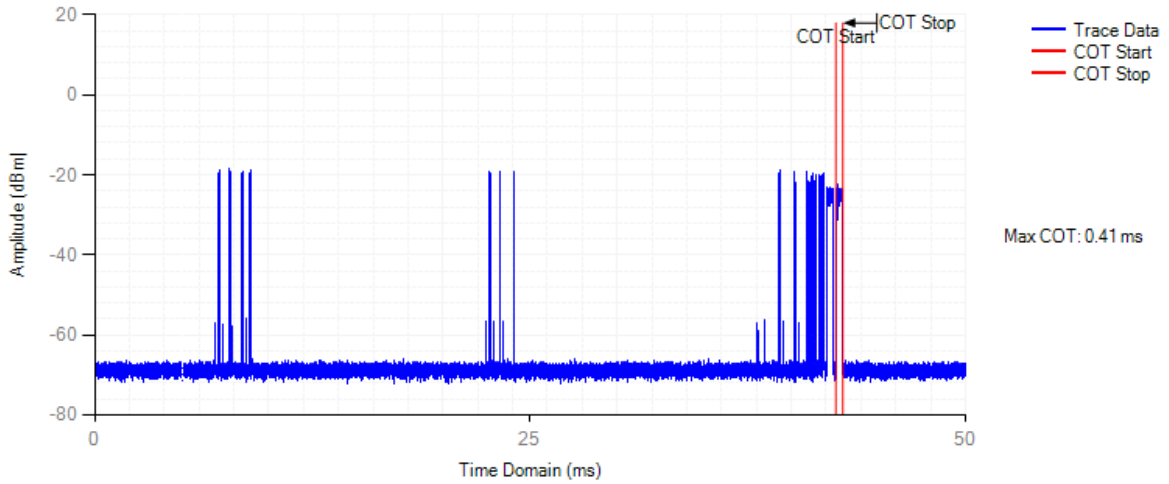


### Idle NVNT 802.11ac80 5290MHz

#### Channel Occupation Time

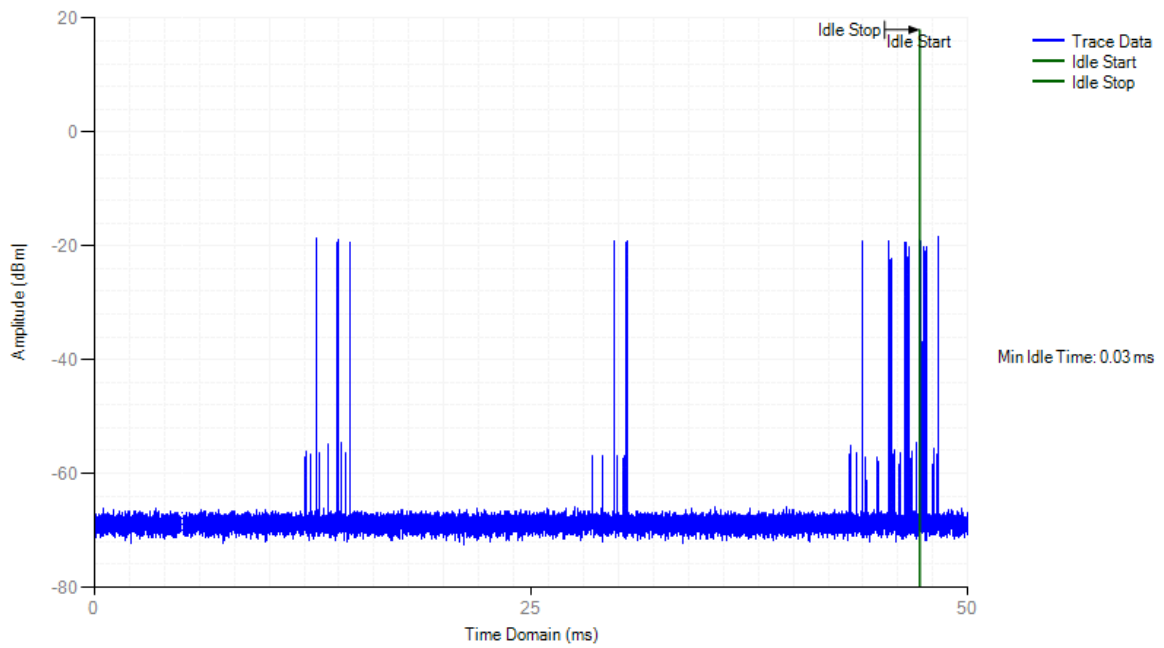


### COT NVNT 802.11ac80 5530MHz

#### Channel Occupation Time

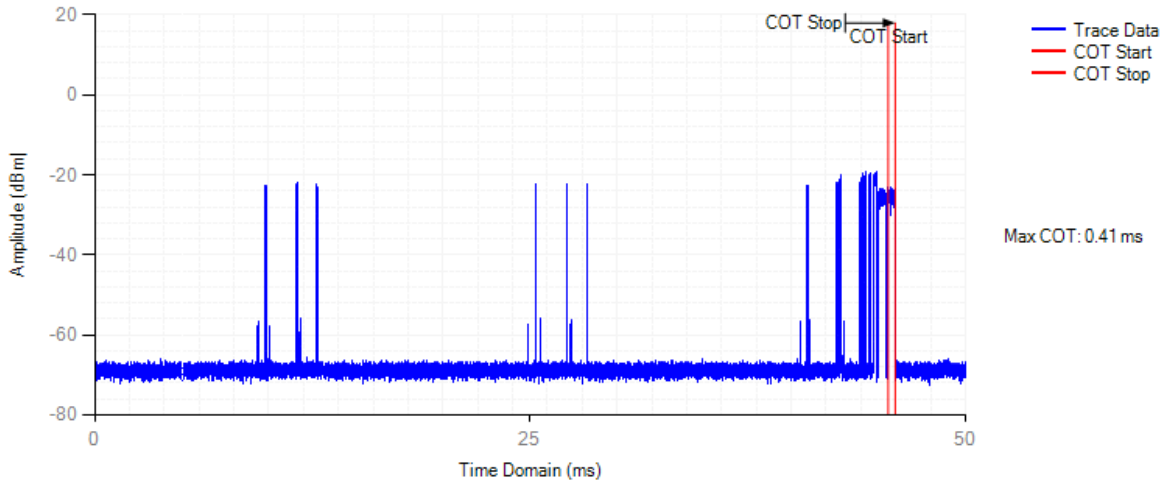


### Idle NVNT 802.11ac80 5530MHz

#### Channel Occupation Time

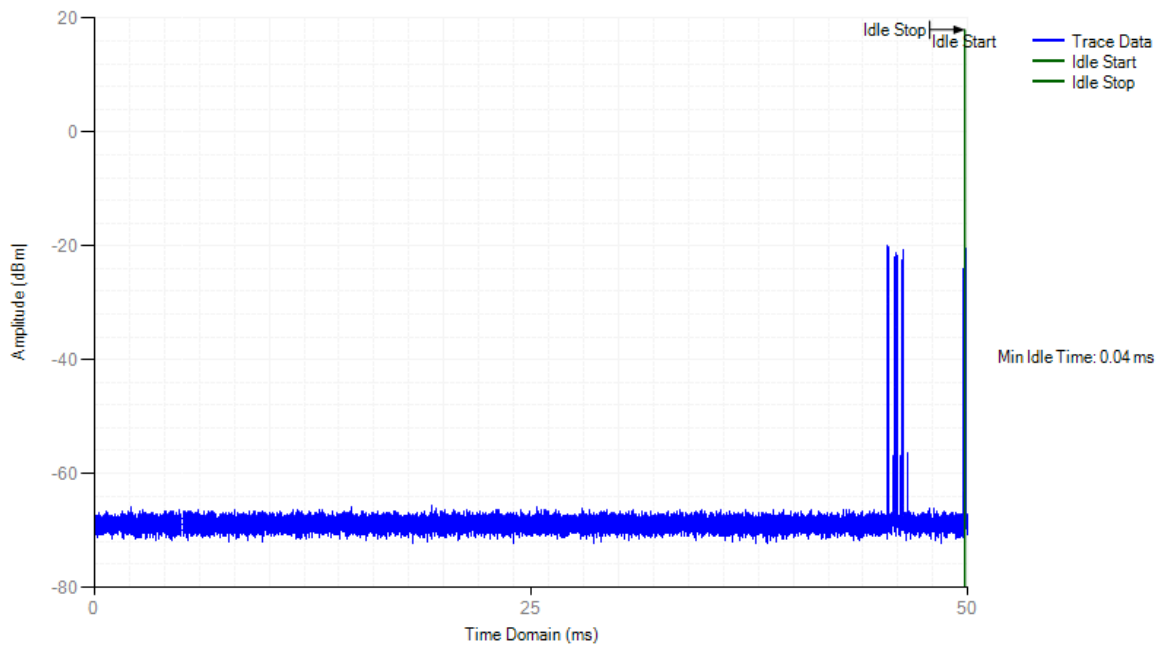


### COT NVNT 802.11n(HT40) 5190MHz

#### Channel Occupation Time

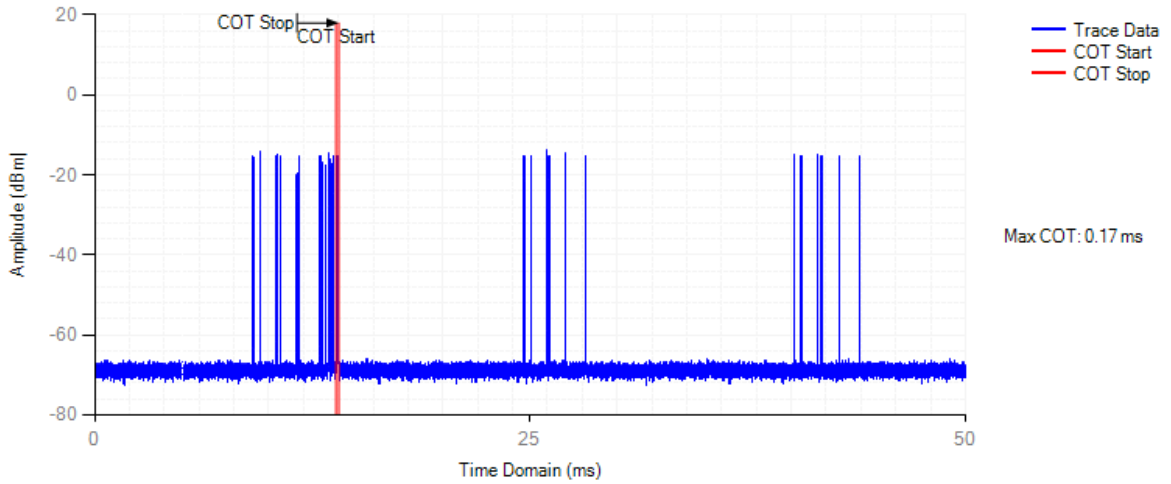

### Idle NVNT 802.11n(HT40) 5190MHz

#### Channel Occupation Time

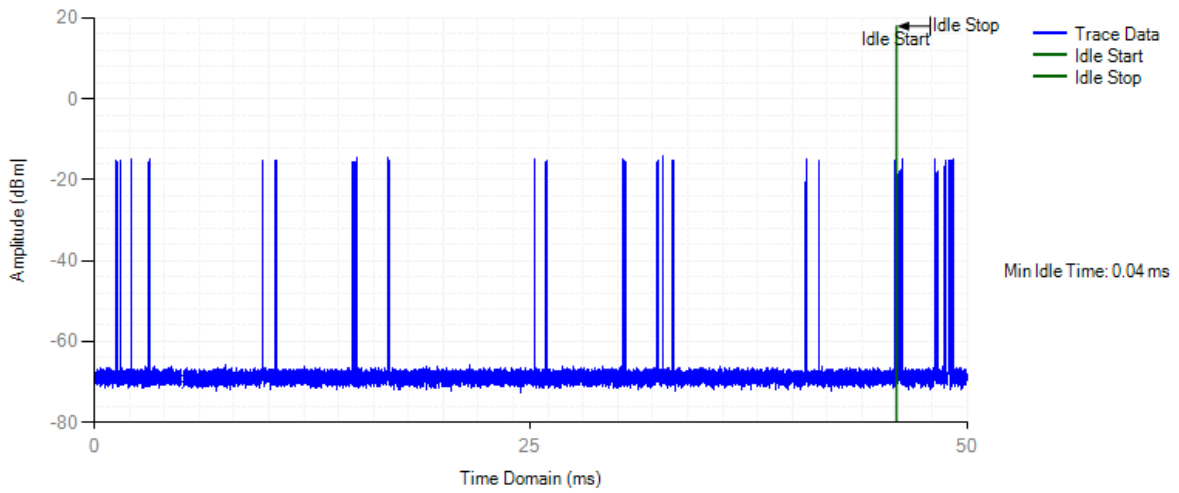


**13.9 Adaptivity COT Idle Period Probability**


Condition	Mode	Frequency (MHz)	Priority Class	Bn	H(Bn)	Pn (%)	Limit (%)	Verdict
NVNT	802.11a	5180	1	0	371	3.7	5	Pass
NVNT	802.11a	5180	1	1	1	3.71	12	Pass
NVNT	802.11a	5180	1	2	3	3.74	18.25	Pass
NVNT	802.11a	5180	1	3	3	3.77	24.5	Pass
NVNT	802.11a	5180	1	4	0	3.77	30.75	Pass
NVNT	802.11a	5180	1	5	0	3.77	37	Pass
NVNT	802.11a	5180	1	6	3	3.8	43.25	Pass
NVNT	802.11a	5180	1	7	0	3.8	49.5	Pass
NVNT	802.11a	5180	1	8	0	3.8	55.75	Pass
NVNT	802.11a	5180	1	9	0	3.8	62	Pass
NVNT	802.11a	5180	1	10	0	3.8	68.25	Pass
NVNT	802.11a	5180	1	11	1	3.81	74.5	Pass
NVNT	802.11a	5180	1	12	0	3.81	80.75	Pass
NVNT	802.11a	5180	1	13	0	3.81	87	Pass
NVNT	802.11a	5180	1	14	1	3.82	93.25	Pass
NVNT	802.11a	5180	1	15	1	3.83	99.5	Pass
NVNT	802.11a	5180	1	16	9640	100	100	Pass
NVNT	802.11ac80	5210	3	0	1008	3.24	5	Pass
NVNT	802.11ac80	5210	3	1	0	10.07	18	Pass
NVNT	802.11ac80	5210	3	2	20	10.27	30.5	Pass
NVNT	802.11ac80	5210	3	3	10	10.37	43	Pass
NVNT	802.11ac80	5210	3	4	13	10.5	55.5	Pass
NVNT	802.11ac80	5210	3	5	9	10.59	68	Pass
NVNT	802.11ac80	5210	3	6	3	10.62	80.5	Pass
NVNT	802.11ac80	5210	3	7	1	10.63	100	Pass
NVNT	802.11ac80	5210	3	8	8941	100	100	Pass
NVNT	802.11ac80	5290	3	0	1008	3.24	5	Pass
NVNT	802.11ac80	5290	3	1	0	10.07	18	Pass
NVNT	802.11ac80	5290	3	2	20	10.27	30.5	Pass
NVNT	802.11ac80	5290	3	3	10	10.37	43	Pass
NVNT	802.11ac80	5290	3	4	13	10.5	55.5	Pass
NVNT	802.11ac80	5290	3	5	9	10.59	68	Pass
NVNT	802.11ac80	5290	3	6	3	10.62	80.5	Pass
NVNT	802.11ac80	5290	3	7	1	10.63	100	Pass
NVNT	802.11ac80	5290	3	8	8941	100	100	Pass
NVNT	802.11ac80	5530	2	0	1103	3.11	5	Pass
NVNT	802.11ac80	5530	2	1	23	11.26	12	Pass
NVNT	802.11ac80	5530	2	2	12	11.38	18.25	Pass
NVNT	802.11ac80	5530	2	3	13	11.51	24.5	Pass
NVNT	802.11ac80	5530	2	4	5	11.56	30.75	Pass
NVNT	802.11ac80	5530	2	5	6	11.62	37	Pass
NVNT	802.11ac80	5530	2	6	36	11.98	43.25	Pass
NVNT	802.11ac80	5530	2	7	34	12.32	49.5	Pass
NVNT	802.11ac80	5530	2	8	40	12.72	55.75	Pass
NVNT	802.11ac80	5530	2	9	29	13.01	62	Pass
NVNT	802.11ac80	5530	2	10	27	13.28	68.25	Pass
NVNT	802.11ac80	5530	2	11	32	13.6	74.5	Pass
NVNT	802.11ac80	5530	2	12	20	13.8	80.75	Pass
NVNT	802.11ac80	5530	2	13	23	14.03	87	Pass
NVNT	802.11ac80	5530	2	14	1	14.04	93.25	Pass
NVNT	802.11ac80	5530	2	15	1	14.05	99.5	Pass

NVNT	802.11ac80	5530	2	16	8596	100	100	Pass
NVNT	802.11n(HT40)	5190	2	0	458	4.58	5	Pass
NVNT	802.11n(HT40)	5190	2	1	6	4.64	12	Pass
NVNT	802.11n(HT40)	5190	2	2	5	4.69	18.25	Pass
NVNT	802.11n(HT40)	5190	2	3	6	4.75	24.5	Pass
NVNT	802.11n(HT40)	5190	2	4	0	4.75	30.75	Pass
NVNT	802.11n(HT40)	5190	2	5	3	4.78	37	Pass
NVNT	802.11n(HT40)	5190	2	6	197	6.75	43.25	Pass
NVNT	802.11n(HT40)	5190	2	7	155	8.3	49.5	Pass
NVNT	802.11n(HT40)	5190	2	8	142	9.72	55.75	Pass
NVNT	802.11n(HT40)	5190	2	9	180	11.52	62	Pass
NVNT	802.11n(HT40)	5190	2	10	160	13.11	68.25	Pass
NVNT	802.11n(HT40)	5190	2	11	180	14.91	74.5	Pass
NVNT	802.11n(HT40)	5190	2	12	128	16.19	80.75	Pass
NVNT	802.11n(HT40)	5190	2	13	161	17.8	87	Pass
NVNT	802.11n(HT40)	5190	2	14	158	19.38	93.25	Pass
NVNT	802.11n(HT40)	5190	2	15	135	20.73	99.5	Pass
NVNT	802.11n(HT40)	5190	2	16	7930	100	100	Pass


Idle Period Probability NVNT 802.11a 5180MHz

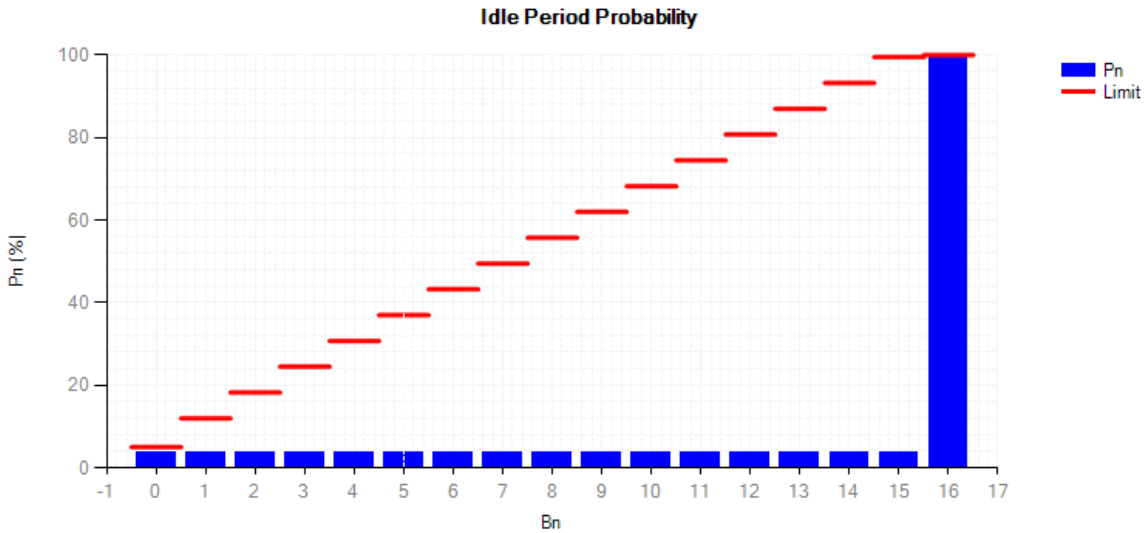


Idle Period Probability NVNT 802.11ac80 5210MHz

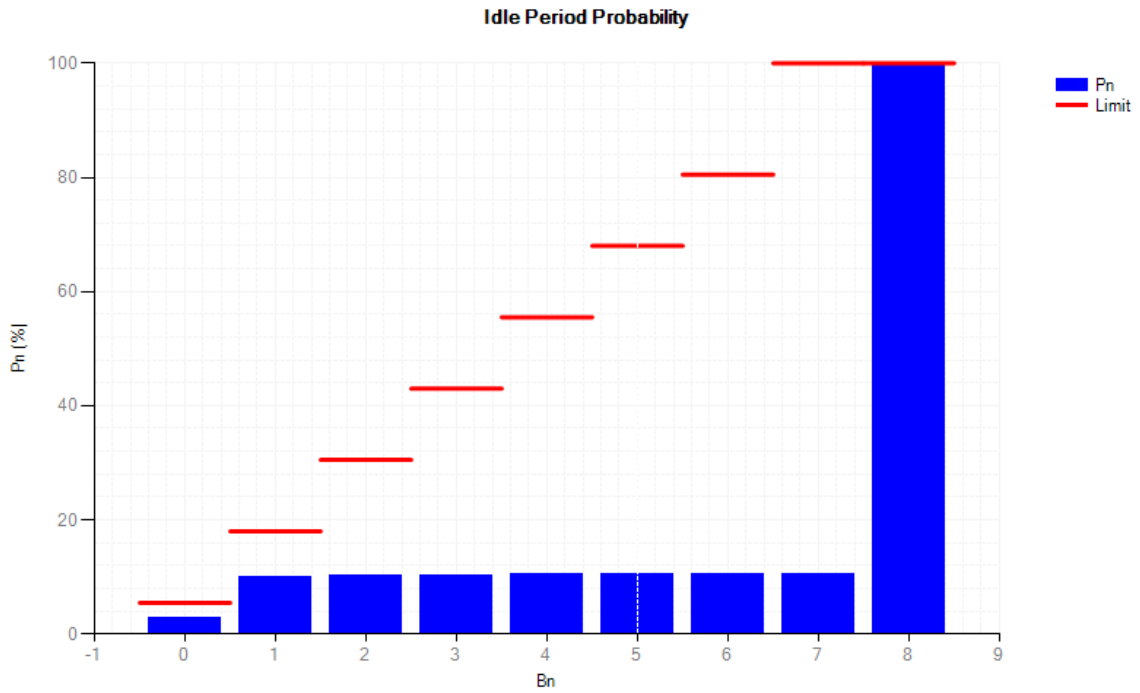


Idle Period Probability NVNT 802.11ac80 5290MHz

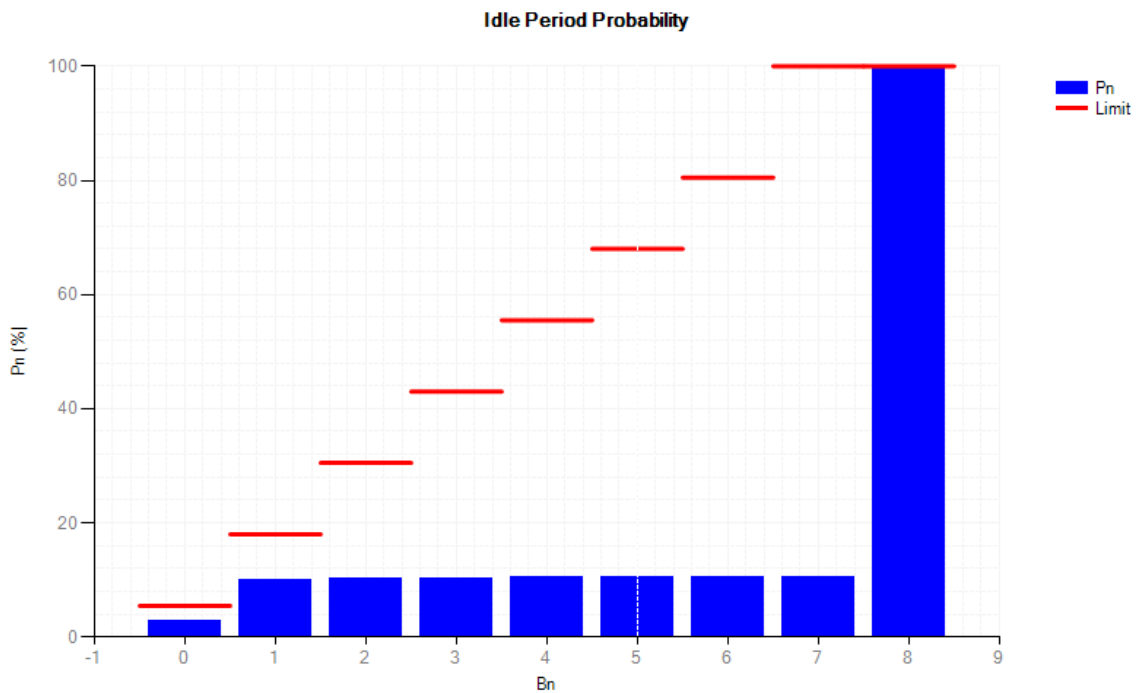

Idle Period Probability NVNT 802.11ac80 5530MHz

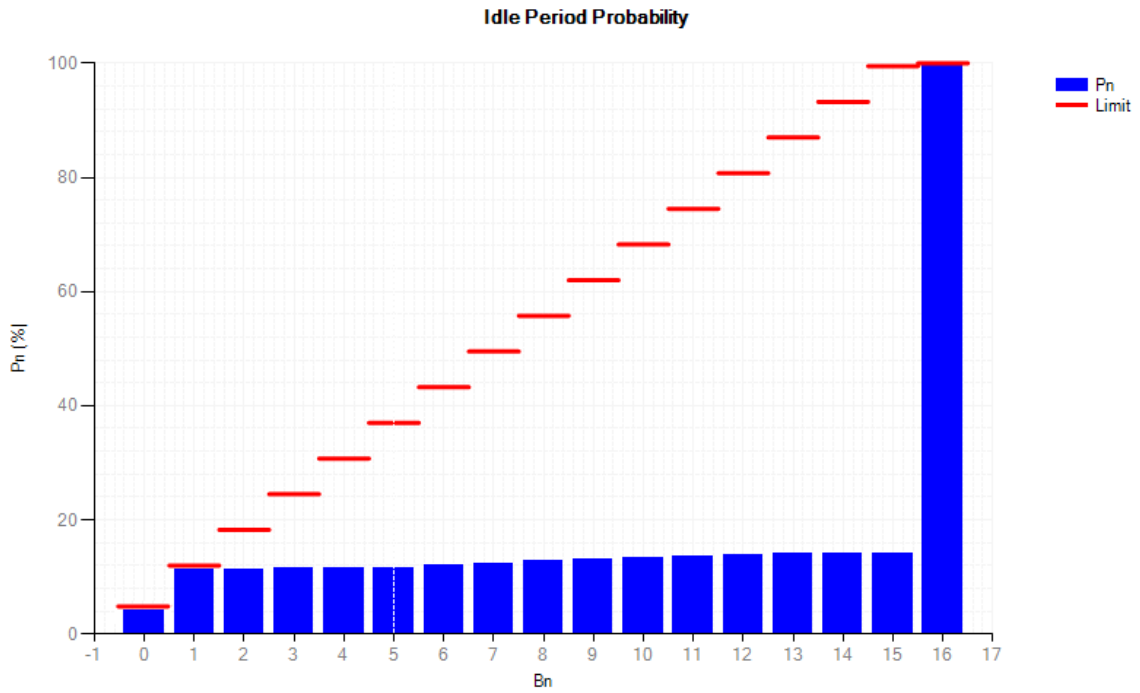


Idle Period Probability NVNT 802.11n(HT40) 5190MHz

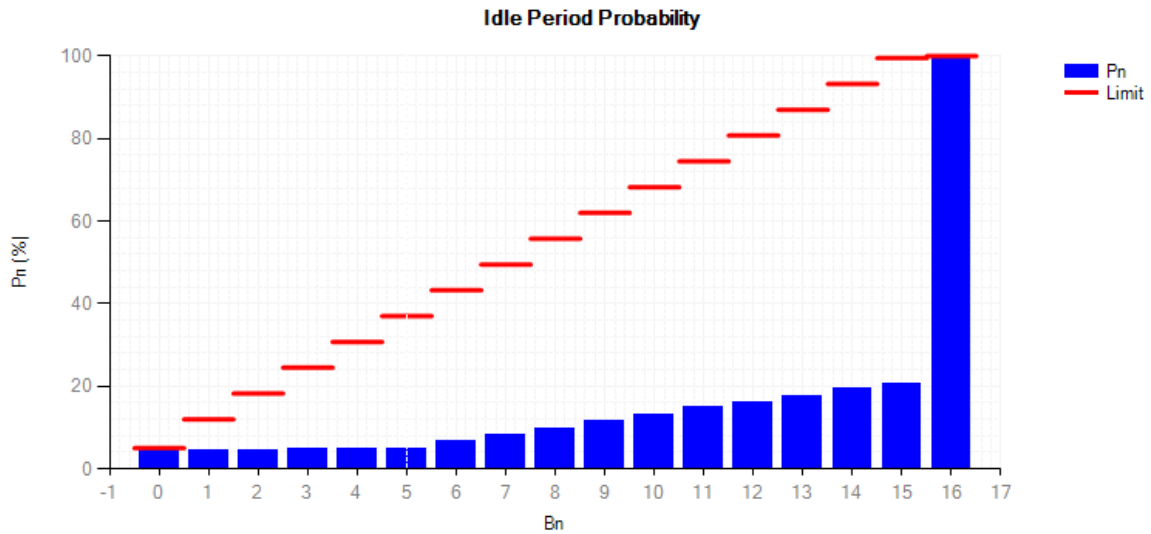



**14. EUT TEST PHOTO**

**SPURIOUS EMISSIONS MEASUREMENT PHOTOS**

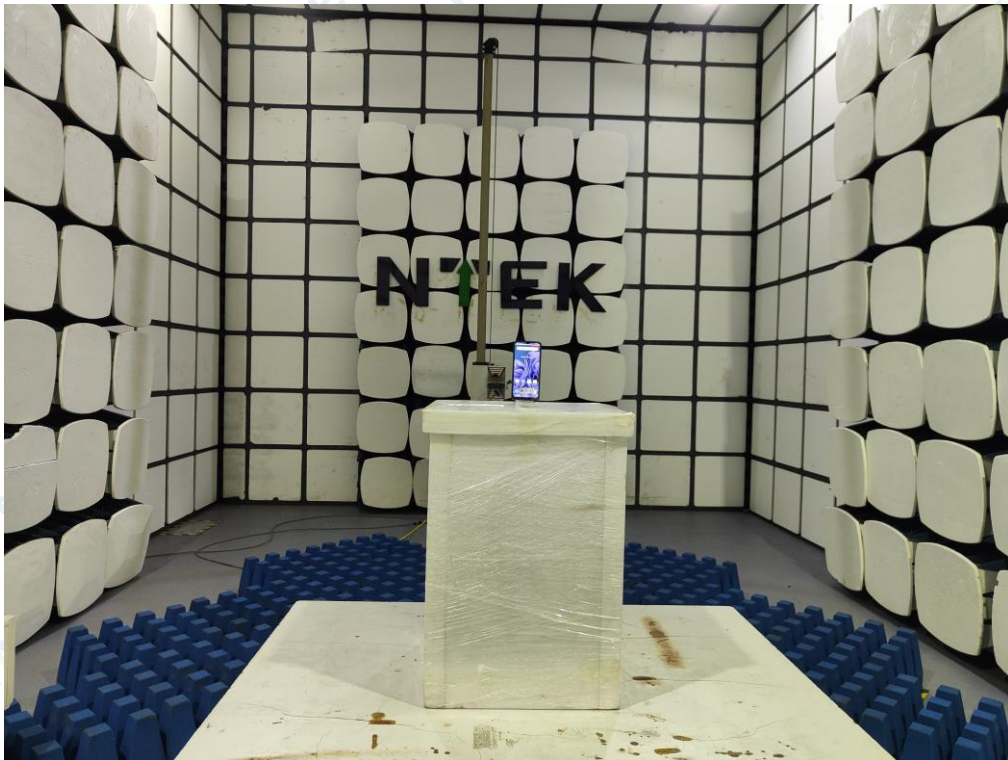

END OF REPORT