



RADIO TEST REPORT

ETSI EN 301 908-1 V13.1.1 (2019-11)

ETSI EN 301 908-13 V13.1.1 (2019-11)

Product : Mobile Phone

Trade Mark : Blackview, OSCAL

Model Name : BV5300 Pro

Family Model : S70 Pro

Report No. : STR230317002008E

Prepared for

DOKE COMMUNICATION (HK) LIMITED
RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI
HK CHINA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : DOKE COMMUNICATION (HK) LIMITED
Address : RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK CHINA
Manufacturer's Name : Shenzhen DOKE Electronic Co., Ltd
Address : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China.

Product description

Product name : Mobile Phone
Trademark : Blackview, OSCAL
Model Name : BV5300 Pro
Family Model : S70 Pro

Standards : ETSI EN 301 908-1 V13.1.1 (2019-11)
ETSI EN 301 908-13 V13.1.1 (2019-11)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the article 3.2 of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number : T230317002R002

Date of Test

Date (s) of performance of tests : Mar 17, 2023 ~ Mar 29, 2023

Date of Issue : Mar 29, 2023

Test Result : Pass

Testing Engineer : Mukzi Lee (Mukzi Lee)

Authorized Signatory : Alex (Alex Li)

Table of Contents **Page**

1.SUMMARY OF TEST RESULTS.....	5
1.1 TEST FACILITY.....	6
1.2 MEASUREMENT UNCERTAINTY	6
2.GENERAL INFORMATION.....	7
2.1 GENERAL DESCRIPTION OF EUT.....	7
2.2 LIST OF TEST EQUIPMENTS	8
2.3 TEST ENVIRONMENT/CONDITIONS	9
2.4 TEST MODE.....	10
2.5 TEST SETUP.....	14
3. SUMMARY OF THE REPORT	15
3.1 TERMS IN THE COLUMN “VERDICT” FOR THE TEST RESULTS LIST OF THISSECTION:	15
D.1. RADIATED SPURIOUS EMISSIONS.	21
D.2. CONTROL AND MONITORING FUNCTIONS (UE)	144
D.3. OUT-OF-SYNCHRONIZATION HANDLING OF OUTPUT POWER	145
PHOTOGRAPHS OF THE TEST SETUP.....	148

1.SUMMARY OF TEST RESULTS

Leading Reference Documents For Testing:

No.	Identity	Document Title
1	ETSI EN 301 908-1	IMT cellular networks; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU; Part 1: Introduction and common requirements
2	ETSI EN 301908-13	IMT cellular networks; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU; Part 13: Evolved Universal Terrestrial Radio Access (E-UTRA) User Equipment (UE)

Specific Reference Documents For Testing:

No.	Identity	Document Title
3	3GPP TS 36.521-1	3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification Radio transmission and reception Part 1: Conformance Testing
4	3GPP TS 36.521-2	3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Implementation Conformance Statement (ICS)

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.
 Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China
 FCC Registered No.: 463705 IC Registered No.:9270A-1
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2.GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone
Trade Mark	Blackview, OSCAL
Model Name	BV5300 Pro
Family Model:	S70 Pro
Model Difference:	All the model are the same circuit and RF module,except the trademark and battery lable is different.
Frequency Bands:	E-UTRA FDD I, III, VII, VIII, XX, XXVIII E-UTRA TDD XL
Frequency Bands:	FDD Band I: Uplink: 1920 MHz to 1980MHz Downlink: 2110 MHz to 2170 MHz FDD Band III: Uplink:1710 MHz to 1785 MHz Downlink: 1805 MHz to 1880 MHz FDD Band VII: Uplink: 2500 MHz to 2570 MHz Downlink: 2620 MHz to 2690 MHz FDD Band VIII: Uplink: 880MHz to 915 MHz Downlink: 925 MHz to 960 MHz FDD Band XX: Uplink: 832 MHz to 862 MHz Downlink: 791 MHz to 821 MHz FDD Band XXVIII: Uplink: 703 MHz to 748MHz Downlink: 758 MHz to 803 MHz TDD Band XL: Uplink & Downlink: 2300 MHz to 2400 MHz
Power Class:	E-UTRA :3
Modulation Mode:	QPSK, 16QAM
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Adapter	Model: QZ-01000EA00 Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A (10.0W)
Battery	DC 3.85V, 6580mAh, 25.333Wh
Rating	DC 3.85V from battery or DC 5V from adapter
Antenna:	PIFA Antenna
Antenna Gain:	B1: 0.43dBi; B3: 0.15dBi; B7:1.05dBi; B8: -2.1dBi; B20: -2.2dBi; B28: -3.12dBi; B40: 0.75dBi
Hardware Version	TE105_MAIN_PCB_V1.1
Software Version	BV5300 Pro_EEA_TE105_V1.0, S70 Pro_EEA_TE105_V1.0

2.2 LIST OF TEST EQUIPMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.01	2023.03.31	1 year
2	Test Receiver	R&S	ESPI7	101318	2022.04.06	2023.04.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Spectrum Analyzer	Agilent	N9020A	MY46471732	2022.04.01	2023.03.31	1 year
6	Horn Antenna	EM	EM-AH-20180	2011071402	2022.03.31	2023.03.30	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.11.07	2023.11.06	1 year
8	Amplifier	EMC	EMC051835S E	980246	2022.06.17	2023.06.16	1 year
9	Loop Antenna	ARA	PLA-2030/B	1029	2022.03.31	2023.03.30	1 year
10	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2022.06.17	2023.06.16	1 year
11	LTE Wireless Communications Test Set	R&S	CMW500	1100.008.02	2022.06.16	2023.06.15	1 year
12	Power Splitter	Mini-Circuits	ZN2PD-63-S+	SF025101428	2020.04..07	2023.04.06	3 year
13	Wireless Communication Test	Anritsu	MT8821C	6262192315	2022.11.08	2023.11.07	1 year
14	Power Meter	DARE	RPR3006W	15I00041SNO8 4	2022.06.16	2023.06.15	1 year
15	ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2022.04.01	2023.03.31	1 year
16	Spectrum Analyzer	R&S	FSV40	101417	2022.06.16	2023.06.15	1 year

2.3 TEST ENVIRONMENT/CONDITIONS

Normal Temperature (NT):	15 ... 35 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Details of Power Supply:	DC 3.87V
Extreme Temperature:	Low Temperature (LT) = -10°C High Temperature (HT) = 40°C
Extreme Voltage of the EUT (Declared by manufacturer):	Normal Voltage (NV) = DC 3.85V Low Voltage (LV) = DC 3.27V High Voltage (HV) = DC 4.43V

Note: The High Voltage DC 4.43V and Low Voltage DC 3.27V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. The High temperature and Low temperature was declared by manufacturer.

2.4 TEST MODE

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS36.521-1 V11.4.0 specification. The EUT supports power Class 3. Power control set to All bits up. A summary of these settings are illustrated below:

Test Mode	Band Width	Modulation Mode	Test Channel
LTE FDD Band I mode	5MHz	QPSK/ 16QAM	Ch 18025
			Ch 18300
			Ch 18575
	10MHz	QPSK/ 16QAM	Ch 18050
			Ch 18300
			Ch 18550
	20MHz	QPSK/ 16QAM	Ch 18100
			Ch 18300
			Ch 18500
LTE FDD Band III mode	1.4MHz	QPSK/ 16QAM	Ch 19207
			Ch 19575
			Ch 19943
	5MHz	QPSK/ 16QAM	Ch 19225
			Ch 19575
			Ch 19925
	10MHz	QPSK/ 16QAM	Ch 19250
			Ch 19575
			Ch 19900
	20MHz	QPSK/ 16QAM	Ch 19300
			Ch 19575
			Ch 19825
LTE FDD Band VII mode	5MHz	QPSK/ 16QAM	Ch 20775
			Ch 21100
			Ch 21425
	10MHz	QPSK/ 16QAM	Ch 20800
			Ch 21100
			Ch 21400
	20MHz	QPSK/ 16QAM	Ch 20850
			Ch 21100
			Ch 21350
LTE FDD Band VIII mode	1.4MHz	QPSK/ 16QAM	Ch 21457
			Ch 21625
			Ch 21793
	5MHz	QPSK/ 16QAM	Ch 21475
			Ch 21625
			Ch 21775
	10MHz	QPSK/ 16QAM	Ch 21500
			Ch 21625
			Ch 21750

LTE FDD Band XX mode	5MHz	QPSK/ 16QAM	Ch 24175
			Ch 24300
			Ch 24425
	10MHz	QPSK/ 16QAM	Ch 24200
			Ch 24300
			Ch 24400
	20MHz	QPSK/ 16QAM	Ch 24250
			Ch 24300
			Ch 24350
LTE FDD Band XXVIII Mode	3MHz	QPSK/ 16QAM	Ch 27225
			Ch 27375
			Ch 27645
	5MHz	QPSK/ 16QAM	Ch 27235
			Ch 27385
			Ch 27635
	10MHz	QPSK/ 16QAM	Ch 27260
			Ch 27410
			Ch 27610
	20MHz	QPSK/ 16QAM	Ch 27310
			Ch 27460
			Ch 27560
TDD Band XL Mode	5MHz	QPSK/ 16QAM	Ch 38675
			Ch 39150
			Ch 39625
	10MHz	QPSK/ 16QAM	Ch 38700
			Ch 39150
			Ch 39600
	20MHz	QPSK/ 16QAM	Ch 38750
			Ch 39150
			Ch 39550


Table 2

Test standard	test items	FDD Band I	FDD Band III	FDD Band VII	FDD Band VIII
		test Band Width			
ETSI EN 301908-1 4.2.2	Radiated emission (UE)	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz, 10 MHz
ETSI EN 301908-13 4.2.2	Transmitter Maximum Output Power	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz, 10 MHz
ETSI EN 301908-13 4.2.3	Transmitter Spectrum Emission Mask	5MHz,10MHz, 20 MHz	1.4MHz, 5MHz,10MHz, 20 MHz	5MHz,10MHz, ,20 MHz	1.4MHz,5MHz, 10 MHz
ETSI EN 301908-13 4.2.4	Transmitter Spurious Emissions	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz,10 MHz
ETSI EN 301908-13 4.2.5	Transmitter Minimum Output Power	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz,5MHz, 0 MHz
ETSI EN 301908-13 4.2.6	Receiver Adjacent Channel Selectivity (ACS)	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz,10 MHz
ETSI EN 301908-13 4.2.7	Receiver Blocking Characteristics	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz,10 MHz
ETSI EN 301908-13 4.2.8	Receiver Spurious Response	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz,10 MHz
ETSI EN 301908-13 4.2.9	Receiver Intermodulation Characteristics	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz, 5MHz,10 MHz
ETSI EN 301908-13 4.2.10	Receiver Spurious Emissions	20 MHz	20 MHz	20 MHz	10 MHz
ETSI EN 301908-13 4.2.11	Transmitter Adjacent Channel Leakage Power Ratio	5MHz,10MHz, ,20 MHz	1.4MHz, 5MHz,10MHz, 20 MHz	5MHz,10MHz, ,20 MHz	1.4MHz,5MHz, 10 MHz
ETSI EN 301908-13 4.2.12	Receiver Reference Sensitivity Level	5MHz,20 MHz	1.4MHz, 5MHz, 20 MHz	5MHz,20 MHz	1.4MHz,10 MHz

Test standard	test items	FDD Band XX	TDD Band XL	FDD Band XXVIII
		test Band Width		
ETSI EN 301908-1 4.2.2	Radiated emission (UE)	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.2	Transmitter Maximum Output Power	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.3	Transmitter Spectrum Emission Mask	5MHz,10MHz, ,20 MHz	5MHz,10MHz, 20 MHz	3MHz,5MHz,10MHz,20 MHz
ETSI EN 301908-13 4.2.4	Transmitter Spurious Emissions	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.5	Transmitter Minimum Output Power	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.6	Receiver Adjacent Channel Selectivity (ACS)	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.7	Receiver Blocking Characteristics	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.8	Receiver Spurious Response	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.9	Receiver Intermodulation Characteristics	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz
ETSI EN 301908-13 4.2.10	Receiver Spurious Emissions	20 MHz	20 MHz	20 MHz
ETSI EN 301908-13 4.2.11	Transmitter Adjacent Channel Leakage Power Ratio	5MHz,10MHz, ,20 MHz	5MHz,10MHz, 20 MHz	3MHz,5MHz,10MHz,20 MHz
ETSI EN 301908-13 4.2.12	Receiver Reference Sensitivity Level	5MHz,20 MHz	5MHz,20 MHz	3MHz,5MHz,20 MHz

2.5 TEST SETUP


1. Radiated Spurious Emission Test Setup

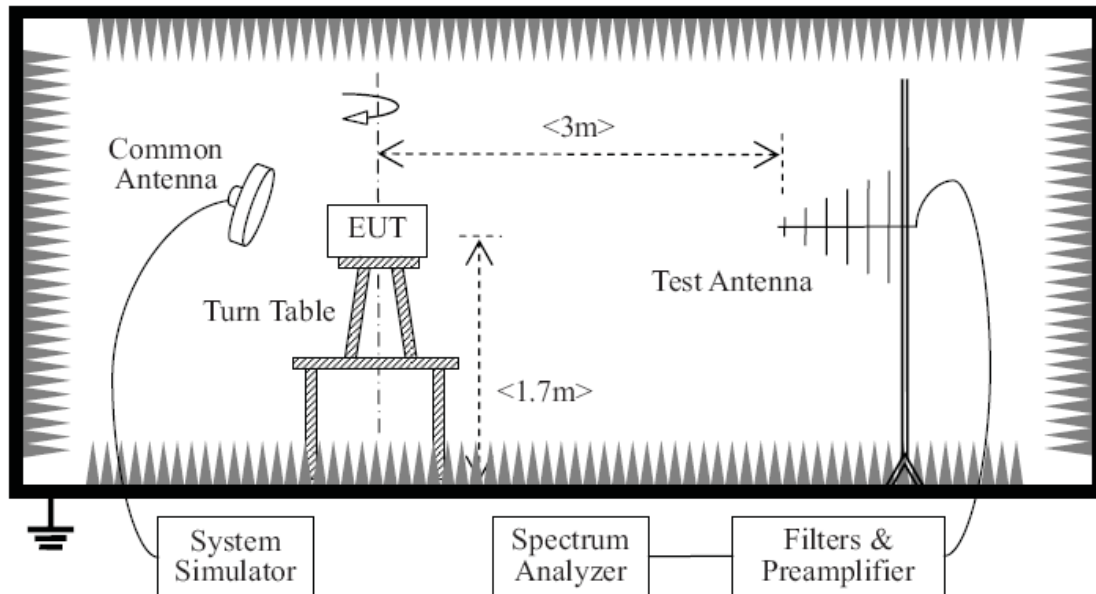

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. LTE FDD band Power Control Level = 3), and only the test result of the maximum output power was recorded.

2. Conducted Test

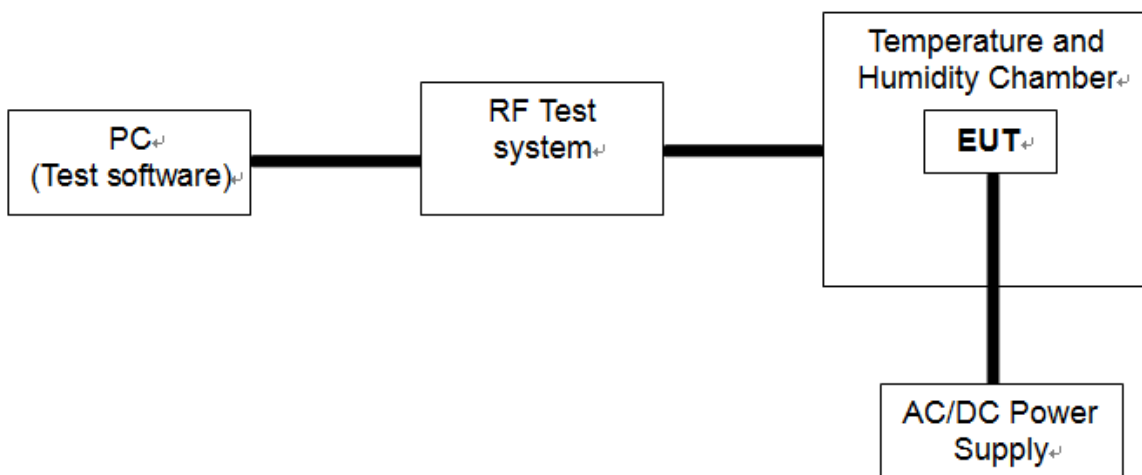

3. SUMMARY OF THE REPORT

3.1 TERMS IN THE COLUMN “VERDICT” FOR THE TEST RESULTS LIST OF THIS SECTION:

Verdict	Description
PASS	EUT passed this test case
FAIL	EUT failed this test case
Decl.	“Declaration”: NTEK has received documents from the applicant and/or manufacturer which show conformity to the applied standards for this test case.
N/A	Test case not applicable for the EUT, please see the column “Note” for detailed

Table 1 EN Requirements Table (Ref. ETSI EN 301 908-1 Annex D)

Testcase in ETSI EN 301908-1	Description	Condition	Test Band	Sample	Result	Test Data
4.2.2	Radiated emission (UE)	NTC	FDD Band I	A01	PASS	Ref. ETSI EN 301 908-1 Annex D)
			FDD Band III			
			FDD Band VII			
			FDD Band VIII			
			FDD Band XX			
			FDD Band XXVIII			
TDD Band XL						

Table 2 EN Requirements Table

The test data please refer to the APPENDIX A & APPENDIX B & APPENDIX C

Testcase in ETSI EN 301908-13	Testcase in 3GPP TS 36.521	Description	Condition	Test Band	Sample	Result	Test Data
4.2.2	6.2.2	Transmitter Maximum Output Power	NT / NV	FDD Band I	A01	PASS	Appendix A - LTE - Normal
			LT / LV	FDD Band III	A01	PASS	Appendix B - LTE - Extreme
			LT / HV	FDD Band VII	A01	PASS	Appendix B - LTE - Extreme
			HT / LV	FDD Band VIII	A01	PASS	Appendix B - LTE - Extreme
			HT / HV	FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix B - LTE - Extreme
4.2.5	6.3.2	Transmitter Minimum Output Power	NT / NV	FDD Band I	A01	PASS	Appendix A - LTE - Normal
			LT / LV	FDD Band III	A01	PASS	Appendix B - LTE - Extreme
			LT / HV	FDD Band VII	A01	PASS	Appendix B - LTE - Extreme
			HT / LV	FDD Band VIII	A01	PASS	Appendix B - LTE - Extreme
			HT / HV	FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix B - LTE - Extreme
4.2.3	6.6.2.1	Transmitter Spectrum Emission Mask	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal
4.2.4	6.6.3.1	Transmitter Spurious Emissions	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal

4.2.6	7.5	Receiver Adjacent Channel Selectivity (ACS)	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal
-------	-----	--	-----	--	-----	------	---------------------------

Testcase in ETSI EN 301908-13	Testcase in 3GPP TS 36.521	Description	Condition	Test Band			Test Data
					Sample	Result	
4.2.11	6.6.2.3	Transmitter Adjacent Channel Leakage Power Ratio	NT / NV	FDD Band I	A01	PASS	Appendix A - LTE - Normal
			LT / LV	FDD Band III	A01	PASS	Appendix B - LTE - Extreme
			LT / HV	FDD Band VII	A01	PASS	Appendix B - LTE - Extreme
			HT / LV	FDD Band VIII	A01	PASS	Appendix B - LTE - Extreme
			HT / HV	FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix B - LTE - Extreme
4.2.7	7.6.1	Receiver Blocking Characteristics (In band)	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal
4.2.7	7.6.2	Receiver Blocking Characteristics (Out band)	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix C - LTE - Blocking
4.2.7	7.6.3	Receiver Blocking Characteristics (Narrow band)	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix C - LTE - Blocking
4.2.8	7.7	Receiver Spurious Response	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	N/A	N/A ^(Note 1)

4.2.9	7.8	Receiver Intermodulation Characteristics	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal
4.2.10	7.9	Receiver Spurious Emissions	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal
4.2.12	7.3	Receiver Reference Sensitivity Level	NTC	FDD Band I FDD Band III FDD Band VII FDD Band VIII FDD Band XX FDD Band XXVIII TDD Band XL	A01	PASS	Appendix A - LTE - Normal

Note 1: Receiver Spurious Response is just for the out-of-band blocking limit is not met.

APPENDIX D——TEST DATA FOR SPURIOUS EMISSIONS

D.1. RADIATED SPURIOUS EMISSIONS.

The laboratory has completed all tests for normal and extreme voltage conditions and LTE+WIFI mode. This report shows only the worst test data.

Band 1 CH L 5M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
34.773	-58.04	2.42	-55.62	-36	-19.62	PASS
84.218	-56.85	3.96	-52.89	-36	-16.89	PASS
224.823	-52.87	9.40	-43.47	-36	-7.47	PASS
524.218	-55.19	1.75	-53.44	-36	-17.44	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level - Limit

Band 1 CH L 5M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1225.074	-57.54	10.54	-47.00	-30	-17.00	PASS
3379.933	-62.32	10.53	-51.79	-30	-21.79	PASS
4746.697	-53.20	11.47	-41.73	-30	-11.73	PASS
6680.514	-53.55	14.37	-39.18	-30	-9.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.153	-57.53	3.87	-53.66	-36	-17.66	PASS
90.892	-52.32	9.97	-42.35	-36	-6.35	PASS
175.745	-56.34	4.18	-52.16	-36	-16.16	PASS
591.188	-51.21	1.85	-49.36	-36	-13.36	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1140.366	-53.97	16.42	-37.55	-30	-7.55	PASS
3394.294	-60.62	14.17	-46.45	-30	-16.45	PASS
4216.040	-58.50	18.69	-39.81	-30	-9.81	PASS
6107.294	-56.02	11.28	-44.74	-30	-14.74	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.714	-56.61	5.74	-50.87	-36	-14.87	PASS
84.100	-58.87	1.95	-56.92	-36	-20.92	PASS
115.542	-50.70	6.40	-44.30	-36	-8.30	PASS
567.713	-52.56	2.10	-50.46	-36	-14.46	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1569.852	-53.82	17.36	-36.46	-30	-6.46	PASS
2684.325	-58.42	18.19	-40.23	-30	-10.23	PASS
5553.932	-53.52	12.03	-41.49	-30	-11.49	PASS
6758.491	-60.57	17.83	-42.74	-30	-12.74	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.005	-58.11	1.26	-56.85	-36	-20.85	PASS
80.940	-54.42	1.62	-52.80	-36	-16.80	PASS
335.594	-51.36	6.56	-44.80	-36	-8.80	PASS
573.677	-55.02	5.61	-49.41	-36	-13.41	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1147.258	-62.72	11.12	-51.60	-30	-21.60	PASS
3820.744	-58.36	16.79	-41.57	-30	-11.57	PASS
5674.461	-61.99	18.32	-43.67	-30	-13.67	PASS
8349.664	-61.62	18.57	-43.05	-30	-13.05	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.645	-50.06	8.70	-41.36	-36	-5.36	PASS
86.559	-51.26	2.08	-49.18	-36	-13.18	PASS
171.142	-50.85	1.29	-49.56	-36	-13.56	PASS
654.204	-56.25	7.35	-48.90	-36	-12.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1265.165	-58.07	18.74	-39.33	-30	-9.33	PASS
3312.646	-54.63	10.19	-44.44	-30	-14.44	PASS
5739.110	-54.71	12.91	-41.80	-30	-11.80	PASS
7357.620	-62.94	10.42	-52.52	-30	-22.52	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.632	-59.12	2.85	-56.27	-36	-20.27	PASS
86.401	-53.28	8.67	-44.61	-36	-8.61	PASS
187.831	-56.71	4.67	-52.04	-36	-16.04	PASS
618.654	-58.61	2.14	-56.47	-36	-20.47	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1553.416	-54.75	10.23	-44.52	-30	-14.52	PASS
3106.604	-55.15	12.91	-42.24	-30	-12.24	PASS
4834.303	-62.78	12.49	-50.29	-30	-20.29	PASS
9662.669	-53.47	14.05	-39.42	-30	-9.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.500	-52.77	4.01	-48.76	-36	-12.76	PASS
72.480	-59.29	4.24	-55.05	-36	-19.05	PASS
135.688	-53.59	2.85	-50.74	-36	-14.74	PASS
533.731	-54.89	1.88	-53.01	-36	-17.01	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1360.693	-57.88	10.98	-46.90	-30	-16.90	PASS
3530.809	-62.14	18.14	-44.00	-30	-14.00	PASS
5392.551	-55.44	14.17	-41.27	-30	-11.27	PASS
7358.041	-53.81	11.89	-41.92	-30	-11.92	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.195	-57.43	6.40	-51.03	-36	-15.03	PASS
91.405	-58.67	6.46	-52.21	-36	-16.21	PASS
287.569	-53.19	8.70	-44.49	-36	-8.49	PASS
682.056	-52.10	2.44	-49.66	-36	-13.66	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1500.192	-62.68	12.48	-50.20	-30	-20.20	PASS
2887.981	-54.75	15.38	-39.37	-30	-9.37	PASS
5692.189	-54.03	15.83	-38.20	-30	-8.20	PASS
6636.741	-55.74	11.33	-44.41	-30	-14.41	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.645	-59.58	3.03	-56.55	-36	-20.55	PASS
96.867	-55.33	8.54	-46.79	-36	-10.79	PASS
179.051	-53.40	5.92	-47.48	-36	-11.48	PASS
529.787	-57.10	1.24	-55.86	-36	-19.86	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1194.383	-59.10	14.36	-44.74	-30	-14.74	PASS
3213.381	-58.54	10.21	-48.33	-30	-18.33	PASS
4214.052	-61.07	15.18	-45.89	-30	-15.89	PASS
8509.636	-54.86	13.84	-41.02	-30	-11.02	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
42.087	-58.06	8.37	-49.69	-36	-13.69	PASS
63.929	-51.99	2.29	-49.70	-36	-13.70	PASS
298.663	-52.90	2.61	-50.29	-36	-14.29	PASS
572.665	-52.14	3.60	-48.54	-36	-12.54	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1150.855	-55.35	10.77	-44.58	-30	-14.58	PASS
2578.383	-55.11	10.44	-44.67	-30	-14.67	PASS
4040.925	-62.31	11.53	-50.78	-30	-20.78	PASS
8772.453	-59.06	16.73	-42.33	-30	-12.33	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.633	-51.97	7.10	-44.87	-36	-8.87	PASS
95.489	-55.52	2.07	-53.45	-36	-17.45	PASS
108.738	-58.91	3.04	-55.87	-36	-19.87	PASS
594.863	-55.59	2.41	-53.18	-36	-17.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1389.748	-53.36	17.84	-35.52	-30	-5.52	PASS
3637.454	-53.18	15.51	-37.67	-30	-7.67	PASS
5511.634	-58.59	10.58	-48.01	-30	-18.01	PASS
6236.830	-60.61	16.40	-44.21	-30	-14.21	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.019	-59.17	8.77	-50.40	-36	-14.40	PASS
67.945	-51.57	5.29	-46.28	-36	-10.28	PASS
114.764	-50.11	8.19	-41.92	-36	-5.92	PASS
547.729	-50.18	4.53	-45.65	-36	-9.65	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1192.558	-62.98	13.26	-49.72	-30	-19.72	PASS
3485.891	-53.49	10.20	-43.29	-30	-13.29	PASS
4672.906	-61.06	10.84	-50.22	-30	-20.22	PASS
8338.880	-58.19	13.95	-44.24	-30	-14.24	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 3 CH L 1.4M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
39.826	-51.38	2.34	-49.04	-36	-13.04	PASS
94.854	-50.22	1.67	-48.55	-36	-12.55	PASS
222.641	-57.10	9.28	-47.82	-36	-11.82	PASS
688.069	-52.61	6.49	-46.12	-36	-10.12	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 1.4M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1150.433	-55.51	12.61	-42.90	-30	-12.90	PASS
4190.125	-57.24	12.89	-44.35	-30	-14.35	PASS
4040.804	-62.19	14.13	-48.06	-30	-18.06	PASS
7854.502	-60.00	17.58	-42.42	-30	-12.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.907	-57.29	1.47	-55.82	-36	-19.82	PASS
98.917	-56.06	7.66	-48.40	-36	-12.40	PASS
277.772	-50.23	6.82	-43.41	-36	-7.41	PASS
602.438	-52.54	5.83	-46.71	-36	-10.71	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1458.376	-59.90	14.64	-45.26	-30	-15.26	PASS
2810.658	-59.40	10.38	-49.02	-30	-19.02	PASS
5721.898	-59.08	15.70	-43.38	-30	-13.38	PASS
9641.003	-56.39	12.89	-43.50	-30	-13.50	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 1.4M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.497	-53.77	4.38	-49.39	-36	-13.39	PASS
75.089	-58.55	8.18	-50.37	-36	-14.37	PASS
356.237	-54.56	1.83	-52.73	-36	-16.73	PASS
612.832	-57.58	1.01	-56.57	-36	-20.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 1.4M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1332.447	-61.13	10.69	-50.44	-30	-20.44	PASS
2818.219	-55.85	14.50	-41.35	-30	-11.35	PASS
4225.050	-57.00	18.61	-38.39	-30	-8.39	PASS
7184.663	-55.81	14.39	-41.42	-30	-11.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.950	-57.20	1.74	-55.46	-36	-19.46	PASS
81.813	-50.76	9.89	-40.87	-36	-4.87	PASS
113.565	-59.07	3.57	-55.50	-36	-19.50	PASS
537.455	-53.07	2.30	-50.77	-36	-14.77	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1312.711	-54.05	12.99	-41.06	-30	-11.06	PASS
3062.759	-56.72	18.56	-38.16	-30	-8.16	PASS
4076.018	-56.87	18.82	-38.05	-30	-8.05	PASS
6382.929	-58.56	15.43	-43.13	-30	-13.13	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 1.4M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.540	-56.79	7.04	-49.75	-36	-13.75	PASS
56.658	-54.04	8.55	-45.49	-36	-9.49	PASS
248.152	-55.19	7.11	-48.08	-36	-12.08	PASS
571.818	-58.56	8.34	-50.22	-36	-14.22	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 1.4M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1245.412	-54.93	16.19	-38.74	-30	-8.74	PASS
2208.707	-55.23	17.75	-37.48	-30	-7.48	PASS
5006.663	-60.28	15.67	-44.61	-30	-14.61	PASS
9593.185	-61.59	11.28	-50.31	-30	-20.31	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.084	-51.53	9.73	-41.80	-36	-5.80	PASS
76.804	-56.33	6.78	-49.55	-36	-13.55	PASS
250.488	-53.53	8.27	-45.26	-36	-9.26	PASS
616.037	-54.92	5.50	-49.42	-36	-13.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1648.582	-54.95	15.42	-39.53	-30	-9.53	PASS
3951.218	-60.76	14.12	-46.64	-30	-16.64	PASS
5586.728	-60.28	16.65	-43.63	-30	-13.63	PASS
6779.613	-59.86	17.29	-42.57	-30	-12.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 3 CH L 5M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
44.973	-59.40	1.53	-57.87	-36	-21.87	PASS
52.817	-58.92	3.23	-55.69	-36	-19.69	PASS
195.918	-52.36	2.44	-49.92	-36	-13.92	PASS
517.268	-51.25	5.49	-45.76	-36	-9.76	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 5M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1192.757	-58.31	13.06	-45.25	-30	-15.25	PASS
2816.402	-62.73	13.53	-49.20	-30	-19.20	PASS
5105.183	-58.92	12.18	-46.74	-30	-16.74	PASS
6727.610	-62.68	17.89	-44.79	-30	-14.79	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.594	-50.74	8.14	-42.60	-36	-6.60	PASS
89.663	-55.92	8.55	-47.37	-36	-11.37	PASS
152.635	-58.35	7.86	-50.49	-36	-14.49	PASS
579.748	-54.23	7.14	-47.09	-36	-11.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1309.992	-53.60	12.48	-41.12	-30	-11.12	PASS
3394.721	-53.61	17.82	-35.79	-30	-5.79	PASS
4197.572	-58.87	10.53	-48.34	-30	-18.34	PASS
7381.109	-58.49	13.72	-44.77	-30	-14.77	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.875	-57.97	2.74	-55.23	-36	-19.23	PASS
55.617	-50.59	5.29	-45.30	-36	-9.30	PASS
344.903	-53.07	5.05	-48.02	-36	-12.02	PASS
603.993	-51.70	1.99	-49.71	-36	-13.71	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1451.652	-61.70	16.55	-45.15	-30	-15.15	PASS
2321.293	-58.82	13.16	-45.66	-30	-15.66	PASS
5427.426	-55.51	15.77	-39.74	-30	-9.74	PASS
8766.400	-57.97	11.63	-46.34	-30	-16.34	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.623	-53.98	7.21	-46.77	-36	-10.77	PASS
78.084	-57.30	7.15	-50.15	-36	-14.15	PASS
206.151	-51.81	7.76	-44.05	-36	-8.05	PASS
509.405	-54.24	4.27	-49.97	-36	-13.97	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1371.811	-55.78	11.70	-44.08	-30	-14.08	PASS
2305.115	-54.25	16.20	-38.05	-30	-8.05	PASS
5452.298	-58.63	16.24	-42.39	-30	-12.39	PASS
7656.600	-54.52	12.76	-41.76	-30	-11.76	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.264	-52.44	9.92	-42.52	-36	-6.52	PASS
70.356	-59.78	4.53	-55.25	-36	-19.25	PASS
174.601	-52.64	6.88	-45.76	-36	-9.76	PASS
692.034	-56.10	1.48	-54.62	-36	-18.62	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1101.588	-59.31	12.38	-46.93	-30	-16.93	PASS
3209.479	-60.84	12.52	-48.32	-30	-18.32	PASS
5878.505	-57.27	10.13	-47.14	-30	-17.14	PASS
7873.367	-54.59	15.96	-38.63	-30	-8.63	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.956	-55.98	9.90	-46.08	-36	-10.08	PASS
82.815	-51.36	6.67	-44.69	-36	-8.69	PASS
106.643	-59.69	3.25	-56.44	-36	-20.44	PASS
556.128	-57.44	7.22	-50.22	-36	-14.22	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1439.132	-56.01	13.08	-42.93	-30	-12.93	PASS
3413.237	-61.87	10.74	-51.13	-30	-21.13	PASS
5494.273	-62.61	13.26	-49.35	-30	-19.35	PASS
8868.611	-62.69	11.42	-51.27	-30	-21.27	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst

Band 3 CH L 20M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
41.784	-53.92	4.05	-49.87	-36	-13.87	PASS
94.784	-50.94	8.65	-42.29	-36	-6.29	PASS
173.904	-56.95	6.33	-50.62	-36	-14.62	PASS
571.598	-59.76	3.56	-56.20	-36	-20.20	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 20M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1199.444	-61.11	14.38	-46.73	-30	-16.73	PASS
3453.543	-58.76	13.18	-45.58	-30	-15.58	PASS
5838.447	-57.38	12.06	-45.32	-30	-15.32	PASS
9643.562	-55.55	18.84	-36.71	-30	-6.71	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.295	-57.83	5.25	-52.58	-36	-16.58	PASS
62.650	-54.49	6.19	-48.30	-36	-12.30	PASS
357.587	-58.80	6.16	-52.64	-36	-16.64	PASS
617.060	-58.32	6.29	-52.03	-36	-16.03	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1203.637	-59.30	12.48	-46.82	-30	-16.82	PASS
4099.388	-61.27	17.13	-44.14	-30	-14.14	PASS
5519.116	-59.16	14.42	-44.74	-30	-14.74	PASS
9252.752	-57.37	17.76	-39.61	-30	-9.61	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.936	-51.12	8.48	-42.64	-36	-6.64	PASS
57.427	-53.41	5.86	-47.55	-36	-11.55	PASS
206.815	-54.43	6.25	-48.18	-36	-12.18	PASS
550.442	-56.92	5.75	-51.17	-36	-15.17	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1367.088	-62.18	11.15	-51.03	-30	-21.03	PASS
2814.463	-55.77	13.00	-42.77	-30	-12.77	PASS
4119.588	-57.41	16.35	-41.06	-30	-11.06	PASS
6300.590	-58.24	15.39	-42.85	-30	-12.85	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.326	-52.66	9.09	-43.57	-36	-7.57	PASS
98.757	-59.93	8.06	-51.87	-36	-15.87	PASS
191.203	-53.63	9.85	-43.78	-36	-7.78	PASS
561.602	-51.73	9.97	-41.76	-36	-5.76	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1400.826	-56.62	11.55	-45.07	-30	-15.07	PASS
3444.718	-55.40	18.97	-36.43	-30	-6.43	PASS
5343.022	-63.00	18.78	-44.22	-30	-14.22	PASS
7858.164	-54.92	18.40	-36.52	-30	-6.52	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.530	-59.44	9.05	-50.39	-36	-14.39	PASS
84.126	-55.77	8.28	-47.49	-36	-11.49	PASS
229.388	-56.80	8.84	-47.96	-36	-11.96	PASS
546.937	-54.13	9.53	-44.60	-36	-8.60	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1582.116	-53.53	16.72	-36.81	-30	-6.81	PASS
3699.753	-59.06	14.84	-44.22	-30	-14.22	PASS
4411.514	-56.92	10.21	-46.71	-30	-16.71	PASS
7174.119	-60.63	12.13	-48.50	-30	-18.50	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.486	-58.53	7.75	-50.78	-36	-14.78	PASS
71.950	-57.47	9.09	-48.38	-36	-12.38	PASS
223.951	-56.49	1.33	-55.16	-36	-19.16	PASS
603.690	-52.59	5.50	-47.09	-36	-11.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1475.745	-58.86	15.27	-43.59	-30	-13.59	PASS
3421.143	-55.40	13.75	-41.65	-30	-11.65	PASS
4859.984	-59.18	14.48	-44.70	-30	-14.70	PASS
8879.488	-62.23	16.82	-45.41	-30	-15.41	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.514	-54.99	7.97	-47.02	-36	-11.02	PASS
52.000	-59.59	5.66	-53.93	-36	-17.93	PASS
299.011	-54.12	6.43	-47.69	-36	-11.69	PASS
627.527	-56.20	9.24	-46.96	-36	-10.96	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1556.335	-57.82	10.19	-47.63	-30	-17.63	PASS
4163.141	-61.57	15.06	-46.51	-30	-16.51	PASS
5269.494	-57.32	15.18	-42.14	-30	-12.14	PASS
8433.323	-61.62	16.62	-45.00	-30	-15.00	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.453	-59.29	6.49	-52.80	-36	-16.80	PASS
59.363	-51.99	5.12	-46.87	-36	-10.87	PASS
255.735	-53.00	4.90	-48.10	-36	-12.10	PASS
610.219	-59.03	9.88	-49.15	-36	-13.15	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1511.708	-60.51	15.95	-44.56	-30	-14.56	PASS
3176.926	-54.87	13.93	-40.94	-30	-10.94	PASS
4077.224	-54.39	14.87	-39.52	-30	-9.52	PASS
7465.251	-60.01	10.13	-49.88	-30	-19.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.840	-56.68	8.74	-47.94	-36	-11.94	PASS
83.683	-50.04	2.09	-47.95	-36	-11.95	PASS
342.543	-51.44	3.29	-48.15	-36	-12.15	PASS
588.139	-52.90	1.03	-51.87	-36	-15.87	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1255.722	-61.85	16.93	-44.92	-30	-14.92	PASS
2573.110	-61.97	17.18	-44.79	-30	-14.79	PASS
5012.186	-55.52	14.83	-40.69	-30	-10.69	PASS
7938.076	-58.93	17.07	-41.86	-30	-11.86	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.405	-51.39	9.87	-41.52	-36	-5.52	PASS
77.745	-57.49	7.38	-50.11	-36	-14.11	PASS
391.185	-53.97	1.03	-52.94	-36	-16.94	PASS
556.078	-53.79	8.02	-45.77	-36	-9.77	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1434.752	-58.52	10.74	-47.78	-30	-17.78	PASS
3145.990	-62.60	10.58	-52.02	-30	-22.02	PASS
4133.435	-57.11	18.95	-38.16	-30	-8.16	PASS
6309.770	-55.43	12.85	-42.58	-30	-12.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 7 CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.208	-56.40	4.94	-51.46	-36	-15.46	PASS
91.108	-55.90	3.57	-52.33	-36	-16.33	PASS
381.765	-54.28	8.34	-45.94	-36	-9.94	PASS
625.480	-52.18	7.82	-44.36	-36	-8.36	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1402.590	-61.99	14.17	-47.82	-30	-17.82	PASS
3611.650	-59.51	13.15	-46.36	-30	-16.36	PASS
4975.828	-53.17	12.20	-40.97	-30	-10.97	PASS
8347.176	-61.15	13.99	-47.16	-30	-17.16	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.464	-50.20	5.15	-45.05	-36	-9.05	PASS
84.998	-50.16	6.40	-43.76	-36	-7.76	PASS
222.355	-53.90	6.90	-47.00	-36	-11.00	PASS
622.058	-57.37	6.90	-50.47	-36	-14.47	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1448.459	-55.01	16.65	-38.36	-30	-8.36	PASS
2783.636	-61.68	15.02	-46.66	-30	-16.66	PASS
4318.508	-55.50	17.70	-37.80	-30	-7.80	PASS
9703.779	-60.49	18.57	-41.92	-30	-11.92	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 7 CH L 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.468	-51.99	7.36	-44.63	-36	-8.63	PASS
72.248	-55.85	2.77	-53.08	-36	-17.08	PASS
344.710	-59.85	7.64	-52.21	-36	-16.21	PASS
652.826	-52.99	7.60	-45.39	-36	-9.39	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1473.814	-61.08	15.00	-46.08	-30	-16.08	PASS
2313.662	-58.43	17.95	-40.48	-30	-10.48	PASS
4463.685	-53.09	13.03	-40.06	-30	-10.06	PASS
7476.980	-56.75	11.82	-44.93	-30	-14.93	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.342	-50.26	5.43	-44.83	-36	-8.83	PASS
93.796	-54.89	1.61	-53.28	-36	-17.28	PASS
367.673	-56.20	4.85	-51.35	-36	-15.35	PASS
590.739	-59.57	9.39	-50.18	-36	-14.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1327.090	-60.92	13.33	-47.59	-30	-17.59	PASS
2527.531	-57.81	11.44	-46.37	-30	-16.37	PASS
4192.581	-58.94	14.90	-44.04	-30	-14.04	PASS
9205.312	-56.60	11.02	-45.58	-30	-15.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
33.114	-54.54	4.40	-50.14	-36	-14.14	PASS
86.831	-52.24	1.38	-50.86	-36	-14.86	PASS
210.791	-51.49	4.29	-47.20	-36	-11.20	PASS
526.610	-55.33	3.71	-51.62	-36	-15.62	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1452.905	-55.88	14.92	-40.96	-30	-10.96	PASS
2451.633	-57.86	12.08	-45.78	-30	-15.78	PASS
4495.120	-55.58	11.96	-43.62	-30	-13.62	PASS
8637.838	-53.55	13.45	-40.10	-30	-10.10	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
42.571	-56.96	5.93	-51.03	-36	-15.03	PASS
64.786	-55.29	7.44	-47.85	-36	-11.85	PASS
245.736	-59.96	8.26	-51.70	-36	-15.70	PASS
687.711	-56.46	4.69	-51.77	-36	-15.77	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1625.800	-56.91	16.63	-40.28	-30	-10.28	PASS
2574.606	-59.21	10.74	-48.47	-30	-18.47	PASS
4559.681	-58.37	14.23	-44.14	-30	-14.14	PASS
7494.816	-60.72	12.00	-48.72	-30	-18.72	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.248	-57.22	1.08	-56.14	-36	-20.14	PASS
85.114	-51.42	5.92	-45.50	-36	-9.50	PASS
360.538	-51.05	2.64	-48.41	-36	-12.41	PASS
632.559	-50.28	2.57	-47.71	-36	-11.71	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1483.786	-55.27	17.41	-37.86	-30	-7.86	PASS
2537.381	-62.79	13.08	-49.71	-30	-19.71	PASS
4765.941	-62.92	16.25	-46.67	-30	-16.67	PASS
9044.333	-60.99	15.81	-45.18	-30	-15.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.784	-59.95	6.49	-53.46	-36	-17.46	PASS
53.245	-59.65	8.24	-51.41	-36	-15.41	PASS
356.064	-54.11	5.31	-48.80	-36	-12.80	PASS
524.072	-57.12	4.31	-52.81	-36	-16.81	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1393.426	-59.17	12.45	-46.72	-30	-16.72	PASS
2300.420	-60.60	14.08	-46.52	-30	-16.52	PASS
4959.204	-61.12	15.46	-45.66	-30	-15.66	PASS
8988.224	-53.30	14.85	-38.45	-30	-8.45	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 1.4M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.452	-59.86	4.87	-54.99	-36	-18.99	PASS
53.990	-52.65	6.87	-45.78	-36	-9.78	PASS
173.795	-56.66	5.69	-50.97	-36	-14.97	PASS
544.759	-56.10	5.73	-50.37	-36	-14.37	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 1.4M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1282.284	-60.82	14.74	-46.08	-30	-16.08	PASS
3818.156	-61.95	12.18	-49.77	-30	-19.77	PASS
5929.084	-55.27	10.82	-44.45	-30	-14.45	PASS
8533.454	-61.11	12.78	-48.33	-30	-18.33	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.056	-53.38	1.89	-51.49	-36	-15.49	PASS
88.234	-58.64	6.85	-51.79	-36	-15.79	PASS
260.086	-59.00	5.46	-53.54	-36	-17.54	PASS
677.406	-56.87	3.25	-53.62	-36	-17.62	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1573.858	-61.62	16.78	-44.84	-30	-14.84	PASS
4157.298	-57.34	16.68	-40.66	-30	-10.66	PASS
5597.443	-59.06	12.11	-46.95	-30	-16.95	PASS
9595.756	-55.27	10.49	-44.78	-30	-14.78	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 1.4M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.000	-53.22	3.86	-49.36	-36	-13.36	PASS
55.114	-58.15	8.33	-49.82	-36	-13.82	PASS
328.617	-53.68	3.25	-50.43	-36	-14.43	PASS
576.193	-53.51	2.26	-51.25	-36	-15.25	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 1.4M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1413.410	-55.46	15.29	-40.17	-30	-10.17	PASS
3682.066	-61.52	14.12	-47.40	-30	-17.40	PASS
5137.625	-62.52	10.90	-51.62	-30	-21.62	PASS
8931.316	-54.99	10.23	-44.76	-30	-14.76	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.204	-55.73	3.92	-51.81	-36	-15.81	PASS
80.653	-55.99	5.56	-50.43	-36	-14.43	PASS
371.073	-51.15	9.20	-41.95	-36	-5.95	PASS
540.501	-51.73	1.98	-49.75	-36	-13.75	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1172.079	-62.89	16.85	-46.04	-30	-16.04	PASS
2437.285	-57.57	13.53	-44.04	-30	-14.04	PASS
5206.562	-55.20	16.64	-38.56	-30	-8.56	PASS
7010.267	-55.71	15.89	-39.82	-30	-9.82	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 1.4M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.103	-59.96	4.68	-55.28	-36	-19.28	PASS
51.364	-58.61	1.32	-57.29	-36	-21.29	PASS
379.246	-51.71	6.33	-45.38	-36	-9.38	PASS
664.402	-54.47	5.97	-48.50	-36	-12.50	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 1.4M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1631.438	-61.35	17.88	-43.47	-30	-13.47	PASS
2351.047	-57.96	10.83	-47.13	-30	-17.13	PASS
5043.389	-59.07	15.58	-43.49	-30	-13.49	PASS
6071.853	-57.35	17.10	-40.25	-30	-10.25	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 1.4M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.715	-59.53	3.00	-56.53	-36	-20.53	PASS
67.099	-54.49	7.54	-46.95	-36	-10.95	PASS
135.493	-59.35	9.80	-49.55	-36	-13.55	PASS
617.396	-53.29	9.22	-44.07	-36	-8.07	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 1.4M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1285.582	-55.07	16.24	-38.83	-30	-8.83	PASS
3621.558	-57.11	10.91	-46.20	-30	-16.20	PASS
5370.937	-61.25	11.74	-49.51	-30	-19.51	PASS
7190.475	-55.96	16.72	-39.24	-30	-9.24	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.642	-56.70	7.89	-48.81	-36	-12.81	PASS
96.947	-52.72	6.22	-46.50	-36	-10.50	PASS
272.661	-52.36	2.10	-50.26	-36	-14.26	PASS
538.711	-50.78	1.22	-49.56	-36	-13.56	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 10M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1634.326	-58.76	14.79	-43.97	-30	-13.97	PASS
2693.645	-59.40	11.75	-47.65	-30	-17.65	PASS
4067.293	-61.85	10.13	-51.72	-30	-21.72	PASS
8768.628	-57.15	10.24	-46.91	-30	-16.91	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 10M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.499	-50.69	6.27	-44.42	-36	-8.42	PASS
68.240	-55.88	7.31	-48.57	-36	-12.57	PASS
306.552	-55.34	1.97	-53.37	-36	-17.37	PASS
590.963	-57.96	9.62	-48.34	-36	-12.34	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1219.916	-53.30	11.85	-41.45	-30	-11.45	PASS
2540.256	-59.71	15.65	-44.06	-30	-14.06	PASS
4201.788	-62.15	16.79	-45.36	-30	-15.36	PASS
6094.493	-53.65	14.87	-38.78	-30	-8.78	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.798	-53.82	9.44	-44.38	-36	-8.38	PASS
64.144	-58.53	1.51	-57.02	-36	-21.02	PASS
261.597	-54.77	9.52	-45.25	-36	-9.25	PASS
521.794	-50.91	7.61	-43.30	-36	-7.30	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 10M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1288.455	-56.58	16.16	-40.42	-30	-10.42	PASS
3005.343	-58.57	15.72	-42.85	-30	-12.85	PASS
5061.903	-55.49	16.46	-39.03	-30	-9.03	PASS
8416.064	-55.86	18.96	-36.90	-30	-6.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 10M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.224	-54.55	4.27	-50.28	-36	-14.28	PASS
88.382	-52.09	2.09	-50.00	-36	-14.00	PASS
216.491	-59.22	4.63	-54.59	-36	-18.59	PASS
595.439	-57.99	5.42	-52.57	-36	-16.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1513.461	-53.28	17.58	-35.70	-30	-5.70	PASS
2692.814	-61.98	13.63	-48.35	-30	-18.35	PASS
4367.693	-58.95	15.39	-43.56	-30	-13.56	PASS
8080.714	-54.81	14.16	-40.65	-30	-10.65	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.254	-54.99	8.21	-46.78	-36	-10.78	PASS
62.029	-59.30	8.00	-51.30	-36	-15.30	PASS
381.256	-59.70	9.50	-50.20	-36	-14.20	PASS
665.262	-54.93	7.55	-47.38	-36	-11.38	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1291.286	-58.92	13.65	-45.27	-30	-15.27	PASS
2381.117	-56.88	10.25	-46.63	-30	-16.63	PASS
5365.697	-62.73	17.49	-45.24	-30	-15.24	PASS
7798.772	-61.33	10.63	-50.70	-30	-20.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.444	-55.50	7.42	-48.08	-36	-12.08	PASS
74.617	-55.54	8.51	-47.03	-36	-11.03	PASS
126.443	-55.50	3.32	-52.18	-36	-16.18	PASS
657.622	-59.28	9.88	-49.40	-36	-13.40	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1538.672	-61.60	10.89	-50.71	-30	-20.71	PASS
3457.846	-55.28	17.24	-38.04	-30	-8.04	PASS
4408.008	-57.99	14.52	-43.47	-30	-13.47	PASS
8961.959	-54.41	13.84	-40.57	-30	-10.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.443	-55.03	8.39	-46.64	-36	-10.64	PASS
57.040	-56.06	9.52	-46.54	-36	-10.54	PASS
383.884	-57.97	6.02	-51.95	-36	-15.95	PASS
593.994	-58.16	2.07	-56.09	-36	-20.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1117.933	-58.91	17.17	-41.74	-30	-11.74	PASS
2963.503	-59.14	16.56	-42.58	-30	-12.58	PASS
4004.788	-60.27	14.98	-45.29	-30	-15.29	PASS
6600.471	-60.07	12.48	-47.59	-30	-17.59	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.334	-57.00	2.56	-54.44	-36	-18.44	PASS
67.189	-52.68	2.94	-49.74	-36	-13.74	PASS
274.811	-50.23	2.20	-48.03	-36	-12.03	PASS
580.114	-52.44	3.32	-49.12	-36	-13.12	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1591.244	-55.54	15.35	-40.19	-30	-10.19	PASS
2254.547	-62.80	13.06	-49.74	-30	-19.74	PASS
5413.667	-60.47	13.92	-46.55	-30	-16.55	PASS
6505.974	-58.12	15.61	-42.51	-30	-12.51	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
33.438	-57.67	8.97	-48.70	-36	-12.70	PASS
84.723	-57.98	3.82	-54.16	-36	-18.16	PASS
287.883	-54.67	8.14	-46.53	-36	-10.53	PASS
517.016	-50.20	5.12	-45.08	-36	-9.08	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1504.796	-54.19	10.42	-43.77	-30	-13.77	PASS
2276.242	-54.39	14.89	-39.50	-30	-9.50	PASS
5210.953	-58.14	17.45	-40.69	-30	-10.69	PASS
7004.076	-61.73	13.87	-47.86	-30	-17.86	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.671	-51.23	2.37	-48.86	-36	-12.86	PASS
67.123	-53.70	3.79	-49.91	-36	-13.91	PASS
336.421	-55.15	9.66	-45.49	-36	-9.49	PASS
512.350	-50.53	3.66	-46.87	-36	-10.87	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1195.822	-55.95	10.20	-45.75	-30	-15.75	PASS
2757.917	-62.54	11.76	-50.78	-30	-20.78	PASS
5073.638	-54.63	13.90	-40.73	-30	-10.73	PASS
8029.177	-61.59	11.71	-49.88	-30	-19.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.617	-59.82	8.29	-51.53	-36	-15.53	PASS
51.755	-50.58	5.04	-45.54	-36	-9.54	PASS
381.920	-58.67	3.03	-55.64	-36	-19.64	PASS
504.505	-59.24	6.42	-52.82	-36	-16.82	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1585.287	-58.30	14.55	-43.75	-30	-13.75	PASS
3618.099	-55.78	11.87	-43.91	-30	-13.91	PASS
4988.374	-61.74	18.75	-42.99	-30	-12.99	PASS
6121.078	-61.81	10.54	-51.27	-30	-21.27	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 8 CH L 10M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.349	-57.97	2.79	-55.18	-36	-19.18	PASS
90.301	-58.46	6.50	-51.96	-36	-15.96	PASS
122.724	-50.89	4.32	-46.57	-36	-10.57	PASS
502.671	-53.87	4.72	-49.15	-36	-13.15	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 10M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1312.241	-61.81	16.45	-45.36	-30	-15.36	PASS
3356.054	-60.71	18.23	-42.48	-30	-12.48	PASS
5642.750	-58.84	11.58	-47.26	-30	-17.26	PASS
8024.540	-54.42	17.67	-36.75	-30	-6.75	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 20 CH L 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.856	-55.82	3.49	-52.33	-36	-16.33	PASS
78.443	-50.31	8.06	-42.25	-36	-6.25	PASS
303.806	-56.33	3.34	-52.99	-36	-16.99	PASS
650.817	-53.74	2.24	-51.50	-36	-15.50	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1386.962	-58.91	16.54	-42.37	-30	-12.37	PASS
2543.722	-58.59	10.92	-47.67	-30	-17.67	PASS
5632.546	-55.83	13.10	-42.73	-30	-12.73	PASS
6877.677	-55.48	12.38	-43.10	-30	-13.10	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.317	-53.44	1.15	-52.29	-36	-16.29	PASS
69.757	-59.91	9.69	-50.22	-36	-14.22	PASS
191.619	-55.25	4.88	-50.37	-36	-14.37	PASS
636.140	-51.26	6.57	-44.69	-36	-8.69	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1294.890	-54.71	12.18	-42.53	-30	-12.53	PASS
2412.917	-61.22	14.38	-46.84	-30	-16.84	PASS
5547.955	-54.43	18.80	-35.63	-30	-5.63	PASS
8735.457	-60.26	11.35	-48.91	-30	-18.91	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.463	-59.25	7.91	-51.34	-36	-15.34	PASS
89.414	-59.38	9.99	-49.39	-36	-13.39	PASS
212.493	-51.47	8.63	-42.84	-36	-6.84	PASS
624.718	-53.00	3.41	-49.59	-36	-13.59	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1433.183	-57.90	17.58	-40.32	-30	-10.32	PASS
4172.249	-56.51	11.95	-44.56	-30	-14.56	PASS
5211.948	-58.43	15.73	-42.70	-30	-12.70	PASS
7895.762	-62.84	13.89	-48.95	-30	-18.95	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.170	-51.51	6.75	-44.76	-36	-8.76	PASS
63.675	-56.85	7.80	-49.05	-36	-13.05	PASS
283.121	-50.93	1.99	-48.94	-36	-12.94	PASS
554.738	-51.45	1.97	-49.48	-36	-13.48	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1424.519	-53.09	12.15	-40.94	-30	-10.94	PASS
3503.770	-54.73	18.86	-35.87	-30	-5.87	PASS
4981.931	-56.81	10.00	-46.81	-30	-16.81	PASS
7430.257	-58.15	13.03	-45.12	-30	-15.12	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 20CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.635	-57.81	8.12	-49.69	-36	-13.69	PASS
91.009	-55.95	2.43	-53.52	-36	-17.52	PASS
227.571	-50.77	8.18	-42.59	-36	-6.59	PASS
576.459	-53.12	3.14	-49.98	-36	-13.98	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1397.232	-56.01	16.55	-39.46	-30	-9.46	PASS
3558.964	-55.45	13.92	-41.53	-30	-11.53	PASS
4698.360	-60.54	17.12	-43.42	-30	-13.42	PASS
7912.633	-57.09	10.04	-47.05	-30	-17.05	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.462	-52.07	2.83	-49.24	-36	-13.24	PASS
62.217	-58.76	1.58	-57.18	-36	-21.18	PASS
379.603	-58.82	1.99	-56.83	-36	-20.83	PASS
695.332	-56.76	9.92	-46.84	-36	-10.84	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1139.657	-54.91	11.38	-43.53	-30	-13.53	PASS
2850.728	-53.62	15.86	-37.76	-30	-7.76	PASS
5438.646	-60.37	16.34	-44.03	-30	-14.03	PASS
7829.799	-59.21	16.40	-42.81	-30	-12.81	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 20 CH L 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.760	-59.35	8.76	-50.59	-36	-14.59	PASS
56.890	-51.07	1.11	-49.96	-36	-13.96	PASS
203.164	-51.30	4.80	-46.50	-36	-10.50	PASS
678.613	-55.92	6.89	-49.03	-36	-13.03	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1236.927	-62.97	12.66	-50.31	-30	-20.31	PASS
2855.230	-59.86	12.95	-46.91	-30	-16.91	PASS
5086.581	-53.21	18.58	-34.63	-30	-4.63	PASS
7981.407	-54.62	18.48	-36.14	-30	-6.14	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.349	-52.93	8.94	-43.99	-36	-7.99	PASS
93.586	-52.58	5.10	-47.48	-36	-11.48	PASS
399.381	-58.10	6.81	-51.29	-36	-15.29	PASS
624.311	-51.20	5.98	-45.22	-36	-9.22	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1112.157	-56.26	18.24	-38.02	-30	-8.02	PASS
3167.865	-53.20	15.15	-38.05	-30	-8.05	PASS
5765.710	-58.47	16.94	-41.53	-30	-11.53	PASS
9374.990	-54.00	12.40	-41.60	-30	-11.60	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 20 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.519	-57.16	7.71	-49.45	-36	-13.45	PASS
80.081	-56.01	3.51	-52.50	-36	-16.50	PASS
319.077	-59.10	3.73	-55.37	-36	-19.37	PASS
632.537	-50.31	8.09	-42.22	-36	-6.22	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1251.323	-62.22	14.69	-47.53	-30	-17.53	PASS
3432.263	-55.67	12.00	-43.67	-30	-13.67	PASS
4223.871	-56.25	15.36	-40.89	-30	-10.89	PASS
9040.829	-62.65	14.99	-47.66	-30	-17.66	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.108	-52.96	5.09	-47.87	-36	-11.87	PASS
79.033	-54.01	8.58	-45.43	-36	-9.43	PASS
347.012	-50.39	8.84	-41.55	-36	-5.55	PASS
580.358	-52.60	9.03	-43.57	-36	-7.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1449.380	-61.85	18.38	-43.47	-30	-13.47	PASS
3865.281	-58.89	10.71	-48.18	-30	-18.18	PASS
4534.572	-54.46	17.41	-37.05	-30	-7.05	PASS
7497.488	-59.03	10.52	-48.51	-30	-18.51	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 20 CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.626	-55.42	5.32	-50.10	-36	-14.10	PASS
58.792	-56.68	1.56	-55.12	-36	-19.12	PASS
134.861	-50.57	1.63	-48.94	-36	-12.94	PASS
562.695	-53.08	8.67	-44.41	-36	-8.41	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1434.819	-55.78	15.41	-40.37	-30	-10.37	PASS
2812.124	-56.83	15.46	-41.37	-30	-11.37	PASS
4057.804	-59.90	17.36	-42.54	-30	-12.54	PASS
6771.690	-58.80	11.61	-47.19	-30	-17.19	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.696	-56.19	8.86	-47.33	-36	-11.33	PASS
69.196	-50.25	6.11	-44.14	-36	-8.14	PASS
140.642	-56.57	7.03	-49.54	-36	-13.54	PASS
695.788	-53.88	3.54	-50.34	-36	-14.34	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1494.130	-60.27	12.24	-48.03	-30	-18.03	PASS
3447.421	-54.90	10.56	-44.34	-30	-14.34	PASS
5475.074	-56.64	15.42	-41.22	-30	-11.22	PASS
8096.682	-53.44	18.84	-34.60	-30	-4.60	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH L 5M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
46.947	-58.27	3.21	-55.06	-36	-19.06	PASS
66.075	-57.00	2.64	-54.36	-36	-18.36	PASS
176.266	-51.20	9.22	-41.98	-36	-5.98	PASS
624.069	-51.68	1.33	-50.35	-36	-14.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 5M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1160.959	-57.86	15.03	-42.83	-30	-12.83	PASS
3035.620	-54.76	16.35	-38.41	-30	-8.41	PASS
5052.289	-54.11	15.26	-38.85	-30	-8.85	PASS
8620.868	-61.68	12.17	-49.51	-30	-19.51	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.351	-59.24	6.02	-53.22	-36	-17.22	PASS
66.891	-50.11	9.93	-40.18	-36	-4.18	PASS
338.092	-53.16	9.17	-43.99	-36	-7.99	PASS
661.581	-56.98	1.06	-55.92	-36	-19.92	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1452.789	-54.30	15.39	-38.91	-30	-8.91	PASS
2282.307	-59.41	16.63	-42.78	-30	-12.78	PASS
4509.758	-56.21	10.85	-45.36	-30	-15.36	PASS
8038.542	-56.20	16.32	-39.88	-30	-9.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.285	-55.88	3.61	-52.27	-36	-16.27	PASS
82.384	-50.50	2.20	-48.30	-36	-12.30	PASS
257.769	-59.81	2.59	-57.22	-36	-21.22	PASS
638.514	-53.85	7.98	-45.87	-36	-9.87	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1510.902	-60.56	14.39	-46.17	-30	-16.17	PASS
2811.592	-57.73	17.80	-39.93	-30	-9.93	PASS
4558.095	-58.99	11.00	-47.99	-30	-17.99	PASS
7891.065	-59.09	11.04	-48.05	-30	-18.05	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.509	-59.70	2.59	-57.11	-36	-21.11	PASS
94.379	-56.92	4.53	-52.39	-36	-16.39	PASS
264.886	-57.03	5.46	-51.57	-36	-15.57	PASS
519.625	-51.09	6.30	-44.79	-36	-8.79	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1241.643	-57.69	18.53	-39.16	-30	-9.16	PASS
3186.271	-55.09	18.49	-36.60	-30	-6.60	PASS
5599.484	-58.38	13.78	-44.60	-30	-14.60	PASS
8513.037	-56.86	18.20	-38.66	-30	-8.66	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.315	-53.35	3.95	-49.40	-36	-13.40	PASS
66.236	-54.79	9.92	-44.87	-36	-8.87	PASS
249.508	-56.20	4.45	-51.75	-36	-15.75	PASS
590.966	-54.81	4.12	-50.69	-36	-14.69	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1360.211	-60.18	18.79	-41.39	-30	-11.39	PASS
3347.330	-54.54	13.34	-41.20	-30	-11.20	PASS
5490.475	-54.26	17.90	-36.36	-30	-6.36	PASS
6198.263	-60.86	15.90	-44.96	-30	-14.96	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.113	-59.66	3.21	-56.45	-36	-20.45	PASS
77.565	-52.71	6.28	-46.43	-36	-10.43	PASS
118.080	-59.67	1.24	-58.43	-36	-22.43	PASS
551.976	-53.94	6.76	-47.18	-36	-11.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1627.639	-53.38	12.97	-40.41	-30	-10.41	PASS
3820.831	-57.75	14.58	-43.17	-30	-13.17	PASS
4261.019	-55.43	16.13	-39.30	-30	-9.30	PASS
7721.101	-54.75	18.07	-36.68	-30	-6.68	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH L 20M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
44.545	-59.57	4.24	-55.33	-36	-19.33	PASS
81.869	-53.85	2.62	-51.23	-36	-15.23	PASS
186.245	-55.27	9.70	-45.57	-36	-9.57	PASS
592.828	-57.25	9.78	-47.47	-36	-11.47	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 20M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1244.439	-56.52	16.15	-40.37	-30	-10.37	PASS
2523.682	-62.90	11.92	-50.98	-30	-20.98	PASS
5077.168	-57.06	16.04	-41.02	-30	-11.02	PASS
6242.067	-55.82	14.48	-41.34	-30	-11.34	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.621	-53.69	3.10	-50.59	-36	-14.59	PASS
86.855	-52.42	3.19	-49.23	-36	-13.23	PASS
381.492	-52.70	3.18	-49.52	-36	-13.52	PASS
634.952	-59.90	4.72	-55.18	-36	-19.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1633.028	-55.18	18.77	-36.41	-30	-6.41	PASS
2402.270	-54.94	18.63	-36.31	-30	-6.31	PASS
4148.907	-53.15	12.53	-40.62	-30	-10.62	PASS
7444.088	-55.71	10.55	-45.16	-30	-15.16	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
47.612	-57.49	6.08	-51.41	-36	-15.41	PASS
91.716	-53.27	5.15	-48.12	-36	-12.12	PASS
281.634	-58.19	9.12	-49.07	-36	-13.07	PASS
691.675	-50.04	2.67	-47.37	-36	-11.37	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1271.111	-54.14	18.44	-35.70	-30	-5.70	PASS
2664.345	-56.67	11.75	-44.92	-30	-14.92	PASS
4734.417	-53.46	12.98	-40.48	-30	-10.48	PASS
7666.885	-56.94	11.08	-45.86	-30	-15.86	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.073	-59.49	5.13	-54.36	-36	-18.36	PASS
50.236	-56.05	6.07	-49.98	-36	-13.98	PASS
174.647	-55.75	7.51	-48.24	-36	-12.24	PASS
651.694	-57.76	9.87	-47.89	-36	-11.89	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1458.791	-53.60	11.07	-42.53	-30	-12.53	PASS
2875.236	-61.51	18.06	-43.45	-30	-13.45	PASS
5390.625	-54.91	11.57	-43.34	-30	-13.34	PASS
9457.919	-58.83	12.40	-46.43	-30	-16.43	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.545	-55.74	2.03	-53.71	-36	-17.71	PASS
60.666	-52.10	9.69	-42.41	-36	-6.41	PASS
258.933	-52.57	4.87	-47.70	-36	-11.70	PASS
664.468	-50.02	7.74	-42.28	-36	-6.28	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1536.074	-53.42	16.22	-37.20	-30	-7.20	PASS
2208.437	-60.95	18.69	-42.26	-30	-12.26	PASS
4129.169	-56.60	11.06	-45.54	-30	-15.54	PASS
6717.173	-61.69	17.54	-44.15	-30	-14.15	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.552	-50.33	6.57	-43.76	-36	-7.76	PASS
53.222	-51.28	4.73	-46.55	-36	-10.55	PASS
372.313	-55.63	6.63	-49.00	-36	-13.00	PASS
583.680	-58.51	6.02	-52.49	-36	-16.49	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1570.060	-61.14	18.31	-42.83	-30	-12.83	PASS
3628.652	-62.43	10.20	-52.23	-30	-22.23	PASS
4572.350	-59.61	18.65	-40.96	-30	-10.96	PASS
8234.099	-55.09	15.58	-39.51	-30	-9.51	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.706	-57.23	4.78	-52.45	-36	-16.45	PASS
80.811	-58.17	5.70	-52.47	-36	-16.47	PASS
373.462	-56.67	3.31	-53.36	-36	-17.36	PASS
631.142	-52.04	8.47	-43.57	-36	-7.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1248.126	-53.39	13.88	-39.51	-30	-9.51	PASS
3769.128	-58.99	18.20	-40.79	-30	-10.79	PASS
4891.671	-58.23	12.24	-45.99	-30	-15.99	PASS
7449.957	-62.45	11.18	-51.27	-30	-21.27	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.235	-56.80	7.54	-49.26	-36	-13.26	PASS
82.652	-53.25	8.75	-44.50	-36	-8.50	PASS
240.123	-54.22	9.24	-44.98	-36	-8.98	PASS
667.999	-51.09	3.90	-47.19	-36	-11.19	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1565.407	-61.33	16.32	-45.01	-30	-15.01	PASS
3877.551	-62.21	14.34	-47.87	-30	-17.87	PASS
4220.429	-61.20	10.21	-50.99	-30	-20.99	PASS
7417.224	-59.32	17.42	-41.90	-30	-11.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
42.333	-50.60	6.59	-44.01	-36	-8.01	PASS
66.967	-53.99	6.25	-47.74	-36	-11.74	PASS
259.489	-57.82	6.33	-51.49	-36	-15.49	PASS
535.644	-51.42	9.05	-42.37	-36	-6.37	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1635.671	-55.97	13.26	-42.71	-30	-12.71	PASS
2461.183	-53.08	18.75	-34.33	-30	-4.33	PASS
5114.030	-62.46	17.06	-45.40	-30	-15.40	PASS
6897.772	-61.26	12.36	-48.90	-30	-18.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.106	-55.01	2.93	-52.08	-36	-16.08	PASS
87.279	-51.13	5.32	-45.81	-36	-9.81	PASS
267.243	-51.55	2.04	-49.51	-36	-13.51	PASS
645.295	-59.81	7.32	-52.49	-36	-16.49	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1541.023	-62.51	11.93	-50.58	-30	-20.58	PASS
3705.384	-56.23	13.24	-42.99	-30	-12.99	PASS
4279.205	-54.26	11.19	-43.07	-30	-13.07	PASS
9339.558	-62.23	17.85	-44.38	-30	-14.38	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.443	-57.51	6.89	-50.62	-36	-14.62	PASS
73.782	-56.86	1.19	-55.67	-36	-19.67	PASS
264.438	-58.62	6.82	-51.80	-36	-15.80	PASS
541.460	-55.23	8.13	-47.10	-36	-11.10	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1122.608	-61.35	10.74	-50.61	-30	-20.61	PASS
4025.412	-58.79	17.88	-40.91	-30	-10.91	PASS
4175.284	-57.21	18.87	-38.34	-30	-8.34	PASS
8228.706	-59.55	18.65	-40.90	-30	-10.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 28 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
44.527	-50.66	5.91	-44.75	-36	-8.75	PASS
78.367	-55.95	8.07	-47.88	-36	-11.88	PASS
157.054	-53.05	3.29	-49.76	-36	-13.76	PASS
521.457	-59.49	2.35	-57.14	-36	-21.14	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1209.702	-60.58	17.27	-43.31	-30	-13.31	PASS
3684.791	-62.23	17.33	-44.90	-30	-14.90	PASS
5437.906	-56.75	18.91	-37.84	-30	-7.84	PASS
9662.850	-57.29	17.08	-40.21	-30	-10.21	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 40 CH L 5M QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
47.055	-59.42	4.52	-54.90	-36	-18.90	PASS
72.364	-52.91	5.36	-47.55	-36	-11.55	PASS
112.045	-53.48	2.42	-51.06	-36	-15.06	PASS
679.077	-59.33	2.98	-56.35	-36	-20.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 5M QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1381.107	-53.14	13.37	-39.77	-30	-9.77	PASS
3366.634	-58.82	10.62	-48.20	-30	-18.20	PASS
4431.085	-57.27	18.55	-38.72	-30	-8.72	PASS
7758.777	-57.07	10.15	-46.92	-30	-16.92	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.313	-51.10	1.05	-50.05	-36	-14.05	PASS
89.812	-50.49	3.43	-47.06	-36	-11.06	PASS
225.111	-52.70	8.87	-43.83	-36	-7.83	PASS
509.523	-52.02	3.45	-48.57	-36	-12.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1102.994	-55.92	13.53	-42.39	-30	-12.39	PASS
3404.917	-60.17	13.54	-46.63	-30	-16.63	PASS
4900.939	-56.32	16.27	-40.05	-30	-10.05	PASS
6282.439	-57.01	15.29	-41.72	-30	-11.72	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.730	-50.65	8.45	-42.20	-36	-6.20	PASS
94.204	-58.46	9.97	-48.49	-36	-12.49	PASS
274.921	-50.86	6.44	-44.42	-36	-8.42	PASS
686.396	-56.12	6.98	-49.14	-36	-13.14	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1155.298	-59.56	10.92	-48.64	-30	-18.64	PASS
2332.677	-62.10	17.11	-44.99	-30	-14.99	PASS
5242.072	-61.43	14.50	-46.93	-30	-16.93	PASS
9798.378	-60.70	17.39	-43.31	-30	-13.31	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.800	-54.11	3.35	-50.76	-36	-14.76	PASS
79.868	-50.99	2.91	-48.08	-36	-12.08	PASS
157.828	-58.16	7.96	-50.20	-36	-14.20	PASS
691.400	-59.88	3.98	-55.90	-36	-19.90	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1373.536	-53.69	18.36	-35.33	-30	-5.33	PASS
3240.372	-54.84	13.91	-40.93	-30	-10.93	PASS
5675.948	-58.02	16.44	-41.58	-30	-11.58	PASS
7917.777	-56.68	11.00	-45.68	-30	-15.68	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 40CH H 5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
42.797	-54.85	5.76	-49.09	-36	-13.09	PASS
85.693	-59.83	1.41	-58.42	-36	-22.42	PASS
399.897	-50.48	4.34	-46.14	-36	-10.14	PASS
575.668	-53.72	1.36	-52.36	-36	-16.36	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1106.449	-58.99	17.93	-41.06	-30	-11.06	PASS
3598.486	-59.53	14.75	-44.78	-30	-14.78	PASS
4731.894	-56.76	12.49	-44.27	-30	-14.27	PASS
7044.215	-56.33	18.82	-37.51	-30	-7.51	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.836	-51.28	2.25	-49.03	-36	-13.03	PASS
85.267	-55.60	9.87	-45.73	-36	-9.73	PASS
238.316	-53.26	6.17	-47.09	-36	-11.09	PASS
632.853	-50.42	3.24	-47.18	-36	-11.18	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1460.896	-56.14	18.79	-37.35	-30	-7.35	PASS
3283.389	-54.93	10.44	-44.49	-30	-14.49	PASS
5335.422	-59.39	16.08	-43.31	-30	-13.31	PASS
8110.129	-54.19	13.74	-40.45	-30	-10.45	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 40 CH L 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.331	-55.83	7.41	-48.42	-36	-12.42	PASS
62.129	-58.55	1.98	-56.57	-36	-20.57	PASS
180.449	-50.44	4.11	-46.33	-36	-10.33	PASS
590.859	-59.68	2.10	-57.58	-36	-21.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1403.377	-61.50	10.60	-50.90	-30	-20.90	PASS
2450.000	-54.16	12.78	-41.38	-30	-11.38	PASS
5000.375	-58.04	12.48	-45.56	-30	-15.56	PASS
9096.890	-57.33	12.49	-44.84	-30	-14.84	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
42.475	-50.30	9.86	-40.44	-36	-4.44	PASS
95.596	-56.27	4.42	-51.85	-36	-15.85	PASS
141.546	-52.87	8.26	-44.61	-36	-8.61	PASS
619.263	-58.43	3.87	-54.56	-36	-18.56	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1208.056	-53.86	18.52	-35.34	-30	-5.34	PASS
2300.507	-61.60	11.28	-50.32	-30	-20.32	PASS
5216.377	-53.57	12.97	-40.60	-30	-10.60	PASS
7140.405	-60.70	10.64	-50.06	-30	-20.06	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 40 CH M 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.506	-58.46	2.58	-55.88	-36	-19.88	PASS
93.583	-51.37	1.52	-49.85	-36	-13.85	PASS
149.833	-55.32	2.22	-53.10	-36	-17.10	PASS
676.698	-56.68	5.23	-51.45	-36	-15.45	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1353.192	-56.41	12.04	-44.37	-30	-14.37	PASS
3552.531	-53.72	15.95	-37.77	-30	-7.77	PASS
4107.727	-56.50	18.31	-38.19	-30	-8.19	PASS
7609.563	-58.31	12.04	-46.27	-30	-16.27	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.701	-57.69	6.81	-50.88	-36	-14.88	PASS
56.776	-52.13	9.20	-42.93	-36	-6.93	PASS
122.683	-55.96	2.69	-53.27	-36	-17.27	PASS
623.780	-58.13	2.81	-55.32	-36	-19.32	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1477.674	-55.98	12.73	-43.25	-30	-13.25	PASS
3689.501	-57.53	14.85	-42.68	-30	-12.68	PASS
5844.491	-53.01	14.58	-38.43	-30	-8.43	PASS
7788.120	-61.41	15.42	-45.99	-30	-15.99	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Band 40 CH H 20M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.835	-56.92	3.96	-52.96	-36	-16.96	PASS
66.895	-52.27	8.27	-44.00	-36	-8.00	PASS
344.513	-54.94	3.67	-51.27	-36	-15.27	PASS
540.591	-57.66	4.27	-53.39	-36	-17.39	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40CH H 20M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1119.463	-53.48	13.89	-39.59	-30	-9.59	PASS
3562.729	-55.17	15.09	-40.08	-30	-10.08	PASS
5425.944	-58.72	15.17	-43.55	-30	-13.55	PASS
9555.011	-53.14	17.52	-35.62	-30	-5.62	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 20M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.921	-56.49	6.48	-50.01	-36	-14.01	PASS
75.197	-54.80	9.49	-45.31	-36	-9.31	PASS
109.545	-54.95	8.46	-46.49	-36	-10.49	PASS
682.528	-58.80	6.73	-52.07	-36	-16.07	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 20M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1491.058	-61.35	18.50	-42.85	-30	-12.85	PASS
2898.476	-56.92	10.83	-46.09	-30	-16.09	PASS
4559.913	-58.55	15.76	-42.79	-30	-12.79	PASS
8442.408	-62.63	10.31	-52.32	-30	-22.32	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

Idle Mode

Band 1 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
41.306	H	-79.37	1.32	-78.05	-57	-21.05	PASS
58.697	H	-81.75	8.43	-73.32	-57	-16.32	PASS
180.496	H	-72.17	6.47	-65.70	-57	-8.70	PASS
685.351	H	-77.38	3.34	-74.04	-57	-17.04	PASS
40.508	V	-77.85	5.22	-72.63	-57	-15.63	PASS
83.547	V	-81.36	2.92	-78.44	-57	-21.44	PASS
391.127	V	-72.13	8.32	-63.81	-57	-6.81	PASS
565.834	V	-81.79	6.30	-75.49	-57	-18.49	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1540.015	V	-76.38	17.56	-58.82	-47	-11.82	PASS
2921.792	V	-75.67	11.72	-63.95	-47	-16.95	PASS
5393.058	V	-74.52	15.47	-59.05	-47	-12.05	PASS
7683.525	V	-75.03	15.86	-59.17	-47	-12.17	PASS
1288.245	H	-77.78	15.85	-61.93	-47	-14.93	PASS
3053.395	H	-74.94	18.42	-56.52	-47	-9.52	PASS
5944.000	H	-75.29	18.48	-56.81	-47	-9.81	PASS
8385.277	H	-73.13	13.63	-59.50	-47	-12.50	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
44.358	H	-76.86	5.81	-71.05	-57	-14.05	PASS
53.707	H	-72.40	7.97	-64.43	-57	-7.43	PASS
107.333	H	-72.04	9.40	-62.64	-57	-5.64	PASS
564.982	H	-75.73	2.03	-73.70	-57	-16.70	PASS
33.994	V	-81.22	3.26	-77.96	-57	-20.96	PASS
90.610	V	-80.68	5.99	-74.69	-57	-17.69	PASS
293.092	V	-76.61	7.79	-68.82	-57	-11.82	PASS
527.067	V	-78.08	9.51	-68.57	-57	-11.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1249.009	V	-78.04	18.47	-59.57	-47	-12.57	PASS
3092.886	V	-74.53	13.36	-61.17	-47	-14.17	PASS
4235.455	V	-79.67	16.25	-63.42	-47	-16.42	PASS
9472.646	V	-72.89	13.94	-58.95	-47	-11.95	PASS
1443.385	H	-75.82	11.74	-64.08	-47	-17.08	PASS
2503.220	H	-75.80	12.53	-63.27	-47	-16.27	PASS
5147.768	H	-79.35	15.05	-64.30	-47	-17.30	PASS
9011.742	H	-72.59	16.82	-55.77	-47	-8.77	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
33.906	H	-78.17	4.57	-73.60	-57	-16.60	PASS
52.027	H	-72.29	1.39	-70.90	-57	-13.90	PASS
327.439	H	-77.92	9.21	-68.71	-57	-11.71	PASS
656.116	H	-75.93	6.97	-68.96	-57	-11.96	PASS
39.277	V	-77.64	8.40	-69.24	-57	-12.24	PASS
64.487	V	-78.91	7.20	-71.71	-57	-14.71	PASS
358.703	V	-77.57	8.38	-69.19	-57	-12.19	PASS
626.436	V	-77.70	9.90	-67.80	-57	-10.80	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 1 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1306.178	V	-80.98	13.59	-67.39	-47	-20.39	PASS
3712.082	V	-76.19	11.63	-64.56	-47	-17.56	PASS
5717.902	V	-77.91	13.09	-64.82	-47	-17.82	PASS
8407.989	V	-78.59	17.52	-61.07	-47	-14.07	PASS
1589.450	H	-75.79	13.94	-61.85	-47	-14.85	PASS
2696.793	H	-79.84	11.73	-68.11	-47	-21.11	PASS
5603.604	H	-81.39	17.92	-63.47	-47	-16.47	PASS
7195.043	H	-75.93	10.23	-65.70	-47	-18.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 1 for 5M and 20M have tested, the worst case is 20M, and the data have record.

Band 3 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
40.241	H	-72.66	4.14	-68.52	-57	-11.52	PASS
91.371	H	-78.87	1.08	-77.79	-57	-20.79	PASS
224.866	H	-78.37	8.96	-69.41	-57	-12.41	PASS
657.335	H	-79.96	6.27	-73.69	-57	-16.69	PASS
43.261	V	-78.96	7.23	-71.73	-57	-14.73	PASS
60.204	V	-78.96	2.50	-76.46	-57	-19.46	PASS
337.191	V	-75.85	2.09	-73.76	-57	-16.76	PASS
574.445	V	-72.09	7.54	-64.55	-57	-7.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1473.473	V	-80.28	10.52	-69.76	-47	-22.76	PASS
3011.467	V	-79.70	17.57	-62.13	-47	-15.13	PASS
4463.159	V	-81.06	10.90	-70.16	-47	-23.16	PASS
8275.057	V	-80.16	16.62	-63.54	-47	-16.54	PASS
1599.608	H	-74.76	12.33	-62.43	-47	-15.43	PASS
2724.290	H	-72.61	18.34	-54.27	-47	-7.27	PASS
4921.331	H	-81.42	11.87	-69.55	-47	-22.55	PASS
7180.703	H	-72.03	13.92	-58.11	-47	-11.11	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
38.044	H	-81.41	3.42	-77.99	-57	-20.99	PASS
54.077	H	-73.70	5.41	-68.29	-57	-11.29	PASS
363.510	H	-79.94	8.40	-71.54	-57	-14.54	PASS
585.029	H	-76.12	8.73	-67.39	-57	-10.39	PASS
37.291	V	-73.68	4.75	-68.93	-57	-11.93	PASS
66.674	V	-78.59	4.75	-73.84	-57	-16.84	PASS
126.436	V	-81.82	9.15	-72.67	-57	-15.67	PASS
539.861	V	-72.97	1.42	-71.55	-57	-14.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1136.787	V	-81.29	12.22	-69.07	-47	-22.07	PASS
3815.170	V	-80.69	14.37	-66.32	-47	-19.32	PASS
4951.343	V	-75.68	13.63	-62.05	-47	-15.05	PASS
7661.387	V	-81.98	15.87	-66.11	-47	-19.11	PASS
1597.393	H	-81.32	18.71	-62.61	-47	-15.61	PASS
3495.924	H	-73.51	16.40	-57.11	-47	-10.11	PASS
4681.975	H	-77.94	13.59	-64.35	-47	-17.35	PASS
7618.410	H	-79.98	18.49	-61.49	-47	-14.49	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.788	H	-73.84	2.46	-71.38	-57	-14.38	PASS
67.176	H	-73.65	2.64	-71.01	-57	-14.01	PASS
333.268	H	-75.76	6.23	-69.53	-57	-12.53	PASS
683.195	H	-79.99	6.03	-73.96	-57	-16.96	PASS
40.946	V	-80.75	8.63	-72.12	-57	-15.12	PASS
53.083	V	-79.65	8.03	-71.62	-57	-14.62	PASS
347.056	V	-80.42	6.47	-73.95	-57	-16.95	PASS
538.360	V	-78.52	9.97	-68.55	-57	-11.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 3 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1469.238	V	-78.96	13.46	-65.50	-47	-18.50	PASS
3149.050	V	-79.04	14.27	-64.77	-47	-17.77	PASS
5357.692	V	-78.80	14.61	-64.19	-47	-17.19	PASS
7946.115	V	-74.84	17.09	-57.75	-47	-10.75	PASS
1133.867	H	-72.38	10.36	-62.02	-47	-15.02	PASS
2445.890	H	-79.23	18.58	-60.65	-47	-13.65	PASS
4533.702	H	-74.55	11.46	-63.09	-47	-16.09	PASS
6517.573	H	-76.10	16.25	-59.85	-47	-12.85	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 3 for 1.4M, 5M and 20M have tested, the worst case is 20M, and the data have record.

Band 7 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
46.177	H	-74.57	5.94	-68.63	-57	-11.63	PASS
98.703	H	-79.20	4.38	-74.82	-57	-17.82	PASS
330.462	H	-76.56	4.97	-71.59	-57	-14.59	PASS
530.355	H	-81.43	9.59	-71.84	-57	-14.84	PASS
46.082	V	-79.96	8.79	-71.17	-57	-14.17	PASS
51.384	V	-75.55	9.23	-66.32	-57	-9.32	PASS
149.793	V	-79.48	7.63	-71.85	-57	-14.85	PASS
578.550	V	-75.15	9.02	-66.13	-57	-9.13	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1288.279	V	-75.21	17.17	-58.04	-47	-11.04	PASS
4015.878	V	-76.76	12.41	-64.35	-47	-17.35	PASS
4072.819	V	-77.76	16.28	-61.48	-47	-14.48	PASS
8307.721	V	-73.34	13.86	-59.48	-47	-12.48	PASS
1591.790	H	-74.69	13.91	-60.78	-47	-13.78	PASS
2340.810	H	-77.69	10.28	-67.41	-47	-20.41	PASS
5619.632	H	-81.52	12.26	-69.26	-47	-22.26	PASS
9550.751	H	-79.12	14.64	-64.48	-47	-17.48	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.911	H	-81.13	8.70	-72.43	-57	-15.43	PASS
69.783	H	-79.23	7.60	-71.63	-57	-14.63	PASS
295.859	H	-76.67	5.11	-71.56	-57	-14.56	PASS
566.664	H	-73.29	7.30	-65.99	-57	-8.99	PASS
42.371	V	-77.18	2.82	-74.36	-57	-17.36	PASS
70.786	V	-75.36	9.09	-66.27	-57	-9.27	PASS
179.804	V	-73.63	8.95	-64.68	-57	-7.68	PASS
615.451	V	-76.46	4.88	-71.58	-57	-14.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1246.944	V	-76.66	14.27	-62.39	-47	-15.39	PASS
3254.555	V	-74.46	10.71	-63.75	-47	-16.75	PASS
4862.918	V	-81.77	18.66	-63.11	-47	-16.11	PASS
9788.110	V	-74.14	17.67	-56.47	-47	-9.47	PASS
1458.827	H	-73.60	12.62	-60.98	-47	-13.98	PASS
2849.606	H	-74.62	10.47	-64.15	-47	-17.15	PASS
4340.498	H	-81.77	15.76	-66.01	-47	-19.01	PASS
9371.472	H	-79.05	11.08	-67.97	-47	-20.97	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
45.821	H	-73.33	5.46	-67.87	-57	-10.87	PASS
98.041	H	-74.05	8.76	-65.29	-57	-8.29	PASS
153.532	H	-80.80	8.77	-72.03	-57	-15.03	PASS
677.760	H	-76.12	1.38	-74.74	-57	-17.74	PASS
44.537	V	-74.62	4.18	-70.44	-57	-13.44	PASS
91.952	V	-75.06	9.28	-65.78	-57	-8.78	PASS
140.899	V	-73.79	7.33	-66.46	-57	-9.46	PASS
697.981	V	-80.90	4.02	-76.88	-57	-19.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 7 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1443.745	V	-72.58	14.81	-57.77	-47	-10.77	PASS
2692.339	V	-76.47	18.94	-57.53	-47	-10.53	PASS
4673.044	V	-74.72	13.63	-61.09	-47	-14.09	PASS
6206.907	V	-80.28	14.33	-65.95	-47	-18.95	PASS
1114.543	H	-73.25	15.67	-57.58	-47	-10.58	PASS
4077.571	H	-77.14	10.45	-66.69	-47	-19.69	PASS
4477.659	H	-81.50	11.31	-70.19	-47	-23.19	PASS
6986.114	H	-72.05	11.99	-60.06	-47	-13.06	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 7 for 5M and 20M have tested, the worst case is 20M, and the data have record.

Band 8 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
38.849	H	-78.96	5.59	-73.37	-57	-16.37	PASS
55.981	H	-72.48	6.44	-66.04	-57	-9.04	PASS
145.458	H	-78.86	6.91	-71.95	-57	-14.95	PASS
587.490	H	-77.50	4.62	-72.88	-57	-15.88	PASS
33.683	V	-75.14	7.16	-67.98	-57	-10.98	PASS
58.779	V	-73.56	9.07	-64.49	-57	-7.49	PASS
358.095	V	-81.94	9.59	-72.35	-57	-15.35	PASS
685.615	V	-79.27	9.44	-69.83	-57	-12.83	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1244.795	V	-81.63	16.00	-65.63	-47	-18.63	PASS
3429.774	V	-75.33	12.07	-63.26	-47	-16.26	PASS
5669.884	V	-75.03	13.67	-61.36	-47	-14.36	PASS
6024.193	V	-72.38	17.56	-54.82	-47	-7.82	PASS
1396.606	H	-79.85	13.70	-66.15	-47	-19.15	PASS
3029.264	H	-81.64	16.25	-65.39	-47	-18.39	PASS
5335.830	H	-75.20	18.89	-56.31	-47	-9.31	PASS
6849.076	H	-72.84	10.85	-61.99	-47	-14.99	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
43.224	H	-75.51	4.28	-71.23	-57	-14.23	PASS
64.572	H	-80.24	2.76	-77.48	-57	-20.48	PASS
108.876	H	-75.84	3.24	-72.60	-57	-15.60	PASS
564.503	H	-78.83	9.76	-69.07	-57	-12.07	PASS
40.849	V	-80.38	3.93	-76.45	-57	-19.45	PASS
50.261	V	-79.58	4.73	-74.85	-57	-17.85	PASS
266.316	V	-75.68	5.03	-70.65	-57	-13.65	PASS
578.531	V	-77.40	4.39	-73.01	-57	-16.01	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1455.411	V	-77.46	16.59	-60.87	-47	-13.87	PASS
3451.991	V	-75.66	13.69	-61.97	-47	-14.97	PASS
5277.775	V	-79.74	18.24	-61.50	-47	-14.50	PASS
9404.051	V	-80.62	12.20	-68.42	-47	-21.42	PASS
1458.502	H	-73.65	13.55	-60.10	-47	-13.10	PASS
2775.323	H	-74.21	18.79	-55.42	-47	-8.42	PASS
4295.744	H	-78.69	16.17	-62.52	-47	-15.52	PASS
6878.638	H	-73.13	16.88	-56.25	-47	-9.25	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
42.569	H	-80.66	9.19	-71.47	-57	-14.47	PASS
78.665	H	-81.73	9.46	-72.27	-57	-15.27	PASS
354.824	H	-79.90	7.01	-72.89	-57	-15.89	PASS
628.407	H	-75.09	6.89	-68.20	-57	-11.20	PASS
41.530	V	-77.83	2.78	-75.05	-57	-18.05	PASS
89.462	V	-74.52	8.50	-66.02	-57	-9.02	PASS
305.657	V	-80.50	3.88	-76.62	-57	-19.62	PASS
535.513	V	-74.79	6.87	-67.92	-57	-10.92	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 8 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1277.773	V	-81.12	18.95	-62.17	-47	-15.17	PASS
4146.019	V	-76.19	12.46	-63.73	-47	-16.73	PASS
5076.976	V	-74.58	15.44	-59.14	-47	-12.14	PASS
7482.389	V	-78.29	12.40	-65.89	-47	-18.89	PASS
1377.792	H	-79.34	12.29	-67.05	-47	-20.05	PASS
3092.863	H	-74.98	14.33	-60.65	-47	-13.65	PASS
4441.784	H	-76.21	14.61	-61.60	-47	-14.60	PASS
8991.548	H	-81.83	13.48	-68.35	-47	-21.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 8 for 1.4M, 5M and 10M have tested, the worst case is 20M, and the data have record.

Band 20 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
44.137	H	-74.75	9.91	-64.84	-57	-7.84	PASS
55.471	H	-73.25	1.29	-71.96	-57	-14.96	PASS
154.916	H	-76.43	7.13	-69.30	-57	-12.30	PASS
587.412	H	-73.60	9.68	-63.92	-57	-6.92	PASS
36.671	V	-73.03	3.79	-69.24	-57	-12.24	PASS
75.517	V	-79.77	7.91	-71.86	-57	-14.86	PASS
156.688	V	-80.56	4.51	-76.05	-57	-19.05	PASS
553.651	V	-77.46	6.29	-71.17	-57	-14.17	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1453.654	V	-74.63	13.44	-61.19	-47	-14.19	PASS
3945.827	V	-75.55	16.76	-58.79	-47	-11.79	PASS
4991.738	V	-78.70	16.63	-62.07	-47	-15.07	PASS
7767.048	V	-72.52	18.59	-53.93	-47	-6.93	PASS
1270.083	H	-80.63	12.26	-68.37	-47	-21.37	PASS
2379.810	H	-81.80	17.09	-64.71	-47	-17.71	PASS
4351.398	H	-76.41	10.36	-66.05	-47	-19.05	PASS
7568.610	H	-73.34	16.63	-56.71	-47	-9.71	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
39.424	H	-80.13	8.96	-71.17	-57	-14.17	PASS
66.370	H	-73.40	6.72	-66.68	-57	-9.68	PASS
249.840	H	-72.57	5.02	-67.55	-57	-10.55	PASS
553.589	H	-79.70	4.69	-75.01	-57	-18.01	PASS
45.623	V	-80.17	2.55	-77.62	-57	-20.62	PASS
80.239	V	-79.23	6.54	-72.69	-57	-15.69	PASS
335.240	V	-75.60	2.65	-72.95	-57	-15.95	PASS
565.983	V	-77.36	2.78	-74.58	-57	-17.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1463.292	V	-72.39	12.40	-59.99	-47	-12.99	PASS
3190.071	V	-78.79	13.14	-65.65	-47	-18.65	PASS
4986.850	V	-79.71	17.69	-62.02	-47	-15.02	PASS
8709.900	V	-73.55	11.55	-62.00	-47	-15.00	PASS
1351.309	H	-78.04	14.87	-63.17	-47	-16.17	PASS
2202.128	H	-76.20	15.14	-61.06	-47	-14.06	PASS
5007.362	H	-73.48	14.76	-58.72	-47	-11.72	PASS
7167.584	H	-80.46	17.71	-62.75	-47	-15.75	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
45.057	H	-74.86	3.63	-71.23	-57	-14.23	PASS
73.448	H	-79.03	1.46	-77.57	-57	-20.57	PASS
223.805	H	-76.44	6.20	-70.24	-57	-13.24	PASS
595.947	H	-75.63	5.99	-69.64	-57	-12.64	PASS
42.791	V	-74.08	1.22	-72.86	-57	-15.86	PASS
70.351	V	-78.11	4.24	-73.87	-57	-16.87	PASS
377.846	V	-74.50	7.03	-67.47	-57	-10.47	PASS
684.921	V	-79.18	1.48	-77.70	-57	-20.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 20 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1631.449	V	-75.91	16.87	-59.04	-47	-12.04	PASS
3344.742	V	-78.49	17.62	-60.87	-47	-13.87	PASS
5705.462	V	-74.78	16.49	-58.29	-47	-11.29	PASS
7633.889	V	-73.27	10.83	-62.44	-47	-15.44	PASS
1570.740	H	-77.57	16.86	-60.71	-47	-13.71	PASS
3758.555	H	-78.16	13.80	-64.36	-47	-17.36	PASS
5512.304	H	-79.79	18.03	-61.76	-47	-14.76	PASS
6630.658	H	-74.08	14.11	-59.97	-47	-12.97	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 20 for 5M and 20M have tested, the worst case is 20M, and the data have record.

Band 28 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
39.306	H	-74.07	5.46	-68.61	-57	-11.61	PASS
74.040	H	-77.37	8.74	-68.63	-57	-11.63	PASS
394.945	H	-74.08	4.41	-69.67	-57	-12.67	PASS
636.724	H	-78.22	6.18	-72.04	-57	-15.04	PASS
47.009	V	-73.38	7.87	-65.51	-57	-8.51	PASS
77.507	V	-75.32	3.13	-72.19	-57	-15.19	PASS
159.990	V	-73.90	4.14	-69.76	-57	-12.76	PASS
532.204	V	-76.95	9.40	-67.55	-57	-10.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1593.626	V	-75.41	15.21	-60.20	-47	-13.20	PASS
2912.180	V	-73.18	17.58	-55.60	-47	-8.60	PASS
4883.686	V	-81.75	11.96	-69.79	-47	-22.79	PASS
7195.551	V	-81.47	13.31	-68.16	-47	-21.16	PASS
1256.190	H	-77.73	11.78	-65.95	-47	-18.95	PASS
2273.266	H	-75.42	12.06	-63.36	-47	-16.36	PASS
5816.843	H	-73.10	15.37	-57.73	-47	-10.73	PASS
6346.439	H	-79.95	11.57	-68.38	-47	-21.38	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
33.963	H	-77.48	3.95	-73.53	-57	-16.53	PASS
62.578	H	-81.01	4.46	-76.55	-57	-19.55	PASS
178.972	H	-80.57	4.68	-75.89	-57	-18.89	PASS
583.538	H	-79.58	3.15	-76.43	-57	-19.43	PASS
36.341	V	-79.66	1.25	-78.41	-57	-21.41	PASS
67.826	V	-81.58	1.42	-80.16	-57	-23.16	PASS
297.498	V	-72.17	2.48	-69.69	-57	-12.69	PASS
529.529	V	-79.11	3.54	-75.57	-57	-18.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1123.423	V	-78.46	16.37	-62.09	-47	-15.09	PASS
2872.438	V	-80.71	10.81	-69.90	-47	-22.90	PASS
5143.707	V	-72.19	16.09	-56.10	-47	-9.10	PASS
8946.678	V	-73.76	11.46	-62.30	-47	-15.30	PASS
1409.466	H	-80.92	16.33	-64.59	-47	-17.59	PASS
3723.030	H	-80.41	14.18	-66.23	-47	-19.23	PASS
4611.116	H	-73.64	12.88	-60.76	-47	-13.76	PASS
6565.412	H	-73.46	16.20	-57.26	-47	-10.26	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
38.716	H	-77.27	7.89	-69.38	-57	-12.38	PASS
66.867	H	-78.33	2.98	-75.35	-57	-18.35	PASS
287.763	H	-73.95	7.23	-66.72	-57	-9.72	PASS
619.508	H	-72.40	5.35	-67.05	-57	-10.05	PASS
37.644	V	-74.87	1.68	-73.19	-57	-16.19	PASS
55.806	V	-77.38	5.62	-71.76	-57	-14.76	PASS
112.034	V	-78.67	7.29	-71.38	-57	-14.38	PASS
585.877	V	-79.03	8.15	-70.88	-57	-13.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 28 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1130.394	V	-78.06	11.90	-66.16	-47	-19.16	PASS
4087.188	V	-79.51	11.23	-68.28	-47	-21.28	PASS
4278.122	V	-75.38	11.72	-63.66	-47	-16.66	PASS
6914.723	V	-77.94	11.39	-66.55	-47	-19.55	PASS
1610.255	H	-80.08	11.33	-68.75	-47	-21.75	PASS
2673.203	H	-79.56	13.63	-65.93	-47	-18.93	PASS
4424.861	H	-79.03	10.12	-68.91	-47	-21.91	PASS
7317.361	H	-72.68	15.67	-57.01	-47	-10.01	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 28 for 5M and 20M have tested, the worst case is 20M, and the data have record.

Band 40 CH L 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
44.327	H	-75.51	8.55	-66.96	-57	-9.96	PASS
68.379	H	-77.94	2.25	-75.69	-57	-18.69	PASS
222.441	H	-74.86	5.03	-69.83	-57	-12.83	PASS
609.843	H	-72.61	5.14	-67.47	-57	-10.47	PASS
36.437	V	-73.21	3.89	-69.32	-57	-12.32	PASS
65.802	V	-79.47	2.27	-77.20	-57	-20.20	PASS
323.034	V	-80.16	1.16	-79.00	-57	-22.00	PASS
578.383	V	-76.50	2.74	-73.76	-57	-16.76	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH L 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1215.112	V	-81.68	14.82	-66.86	-47	-19.86	PASS
2972.330	V	-72.86	17.24	-55.62	-47	-8.62	PASS
5200.632	V	-77.64	12.23	-65.41	-47	-18.41	PASS
6421.107	V	-76.20	15.32	-60.88	-47	-13.88	PASS
1205.807	H	-81.80	18.71	-63.09	-47	-16.09	PASS
4024.231	H	-81.94	17.33	-64.61	-47	-17.61	PASS
4162.317	H	-75.46	16.75	-58.71	-47	-11.71	PASS
8786.390	H	-72.33	15.91	-56.42	-47	-9.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
40.389	H	-73.45	3.77	-69.68	-57	-12.68	PASS
74.937	H	-76.77	6.45	-70.32	-57	-13.32	PASS
283.299	H	-81.89	4.56	-77.33	-57	-20.33	PASS
647.439	H	-75.56	7.01	-68.55	-57	-11.55	PASS
36.699	V	-75.73	7.36	-68.37	-57	-11.37	PASS
79.931	V	-72.97	7.56	-65.41	-57	-8.41	PASS
314.406	V	-73.56	4.46	-69.10	-57	-12.10	PASS
616.742	V	-80.23	2.00	-78.23	-57	-21.23	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH M 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1239.537	V	-75.98	12.98	-63.00	-47	-16.00	PASS
3068.534	V	-74.85	12.98	-61.87	-47	-14.87	PASS
4123.264	V	-80.31	12.07	-68.24	-47	-21.24	PASS
6837.708	V	-77.63	11.61	-66.02	-47	-19.02	PASS
1161.463	H	-81.91	13.45	-68.46	-47	-21.46	PASS
3970.401	H	-76.96	18.00	-58.96	-47	-11.96	PASS
5172.525	H	-74.53	10.31	-64.22	-47	-17.22	PASS
6018.583	H	-73.35	19.00	-54.35	-47	-7.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 20M QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
47.576	H	-75.88	3.14	-72.74	-57	-15.74	PASS
64.792	H	-79.54	6.56	-72.98	-57	-15.98	PASS
254.284	H	-80.60	1.32	-79.28	-57	-22.28	PASS
562.632	H	-75.79	7.33	-68.46	-57	-11.46	PASS
45.110	V	-76.33	8.75	-67.58	-57	-10.58	PASS
62.295	V	-79.60	9.21	-70.39	-57	-13.39	PASS
140.717	V	-79.37	7.33	-72.04	-57	-15.04	PASS
502.124	V	-76.42	3.77	-72.65	-57	-15.65	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Band 40 CH H 20M QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1119.142	V	-78.46	17.69	-60.77	-47	-13.77	PASS
2568.770	V	-77.52	12.59	-64.93	-47	-17.93	PASS
5620.432	V	-78.53	10.61	-67.92	-47	-20.92	PASS
9494.868	V	-76.06	13.57	-62.49	-47	-15.49	PASS
1261.727	H	-78.82	12.28	-66.54	-47	-19.54	PASS
3845.917	H	-80.74	10.80	-69.94	-47	-22.94	PASS
5944.519	H	-75.43	11.82	-63.61	-47	-16.61	PASS
6812.141	H	-81.40	17.70	-63.70	-47	-16.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: The test band 40 for 5M and 20M have tested, the worst case is 20M, and the data have record.

D.2. CONTROL AND MONITORING FUNCTIONS (UE)

Definition & Limits

This requirement, together with other control and monitoring technical requirements identified in the table of cross references in the applicable part, verifies that the control and monitoring functions of the UE prevent it from transmitting in the absence of a valid network.

This test is applicable to radio communications equipment and ancillary equipment in the operating band defined in the applicable part of this multi-part harmonised standard.

This test shall be performed on the radio communications equipment and/or a representative configuration of the ancillary equipment.

Limits:

The maximum measured power during the duration of the test shall not exceed -30 dBm.

Test method

- a) At the start of the test, the UE shall be switched off. The UE antenna connector shall be connected to a power measuring equipment, with the following characteristics:
 - the RF bandwidth shall exceed the total operating transmit frequency range of the UE for operation with an applicable part;
 - the response time of the power measuring equipment shall be such that the measured power has reached within 1 dB of its steady state value within 100 μs of a CW signal being applied;
 - it shall record the maximum power measured.

NOTE: The equipment may include a video low pass filter to minimize its response to transients or Gaussian noise peaks.

- b) The UE shall be switched on for a period of approximately fifteen minutes, and then switched off.
- c) The EUT shall remain switched off for a period of at least thirty seconds, and shall then be switched on for a period of approximately one minute.
- d) The maximum power emitted from the UE throughout the duration of the test shall be recorded. The results obtained shall be compared to the limits in clause 4.2.4.2 in order to prove compliance.

Test Data

Test Condition	Monitoring band	Max Measured Power(dBm)	Limit(dBm)	Result
Normal	The whole band range	-44.87	-30	Pass

D.3. OUT-OF-SYNCHRONIZATION HANDLING OF OUTPUT POWER

Definition

The UE shall monitor the DPCCH quality in order to detect a loss of the signal on Layer 1. The threshold Q_{out} specifies at what DPCCH quality levels the UE shall shut its power off. The threshold is not defined explicitly, but is defined by the conditions under which the UE shall shut its transmitter off, as stated in this clause.

The DPCCH quality shall be monitored in the UE and compared to the threshold Q_{out} for the purpose of monitoring synchronization. The threshold Q_{out} should correspond to a level of DPCCH quality where no reliable detection of the TPC commands transmitted on the downlink DPCCH can be made. This can be at a TPC command error ratio level of e.g. 20 %.

Limits

When the UE estimates the DPCCH quality over the last 160 ms period to be worse than a threshold Q_{out} , the UE shall shut its transmitter off within 40 ms.

The quality level at the thresholds Q_{out} correspond to different signal levels depending on the downlink conditions DCH parameters. For the conditions in table 4.2.11.2-1, a signal with the quality at the level Q_{out} can be generated by a $DPCCH_{Ec}/I_{or}$ ratio of -25 dB. The DL reference measurement channel 12,2 kbit/s is specified in ETSI TS 134 121-1 [1], clause C.3.1 and with static propagation conditions. The downlink physical channels, other than those specified in table 4.2.11.2-1, are as specified in table E.3.3 of annex E in ETSI TS 134 121-1 [1].

Parameter	Value	Unit
\hat{I}_{or}/I_{oc}	-1	dB
I_{oc}	-60	dBm/3,84 MHz
$\frac{DPDCH_{Ec}}{I_{or}}$	See figure 4.2.11.2-1: Before point A: <ul style="list-style-type: none"> -16,6 for UEs not supporting enhanced receiver performance type 1 for DCH -19,6 for UEs supporting enhanced receiver performance type 1 for DCH After point A not defined	dB
$\frac{DPCCH_{Ec}}{I_{or}}$	See figure 4.2.11.2-1	dB
Information Data Rate	12,2	kbit/s

Figure 4.2.11.2-1 and table 4.2.11.2-2 show an example scenario where the $DPCCH_{Ec}/I_{or}$ ratio varies from a level where the DPCH is demodulated under normal conditions, down to a level below Q_{out} where the UE shall shut its power off.

Test Procedure

Initial conditions

Test environment: normal (see annex B).

The frequencies to be tested are mid range as defined in ETSI TS 134 108 [2], clause 5.1:

- 1) Connect the SS to the UE antenna connector.
- 2) A call is set up according to the Generic call setup procedure, with the following exception according to table 5.3.10.1.1-1 for information elements in System Information Block type 1 found in ETSI TS 134 108 [2].

Table 5.3.10.1.1-1: System Information Block type 1 message

Information Element	Value
UE Timers and constants in connected mode	
- T313	15 s
- N313	200

- 3) RF parameters are set up according to table 4.2.11.2-1 with DPCCH_Ec/Ior ratio level according to table 4.2.11.2-2, 'before A'.
- 4) Enter the UE into loopback test mode and start the loopback test using the procedure defined in ETSI TS 134 109 [3], clause 5.3.

Test Data

Environmental Conditions

Temperature	18~22° C
Relative Humidity	45~66%
ATM Pressure	101.1~101.7kPa


Test Result: Pass.

CONDUCTED TEST DATA

Refer to APPENDIX A& APPENDIX B& APPENDIX C for LTE Test data

PHOTOGRAPHS OF THE TEST SETUP

Radiated Spurious Emission Test

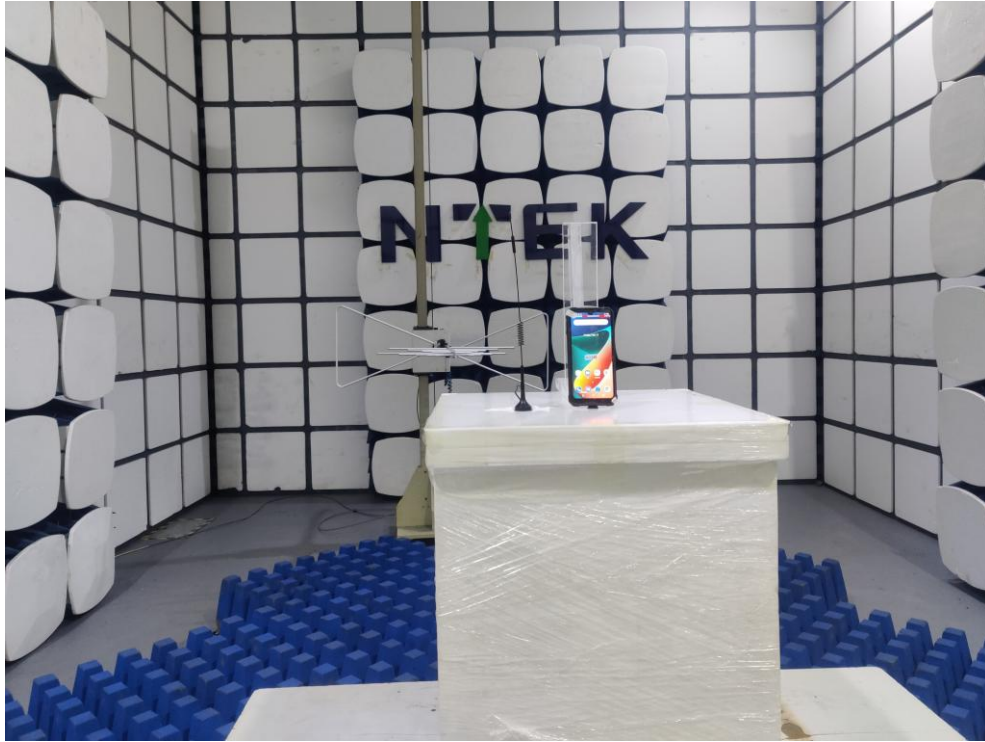

END OF REPORT