


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the R&TTE directive 1999/5/EC.

Applicant/Manufacturer : Shenzhen Fenda Technology Co., Ltd.
Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
Factory : Shenzhen Fenda Technology Co., Ltd.
Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
E.U.T. : 2.1 Computer Multimedia Speaker
Brand Name : F&D
Model No. : A140X, A140U, A140BT, A140F, A160X, A160BT, 140XF, A111X, A521X, A520X, A530X, A511X, A350X, A522X, A355X
(For model differences, refer to Section 2.1)
Measurement Standard : ETSI EN 300328 V1.9.1: 2015
Date of Receiver : August 31, 2016
Date of Test : August 31, 2016 to September 22, 2016
Date of Report : January 11, 2017

This Test Report is Issued Under the Authority of :

Prepared by



Lucy Li / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
 - PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST 4
- 2. DESCRIPTION OF TEST MODES6**
- 3. TEST FREQUENCIES6**
- 4. OBJECTIVE6**
- 5. TEST METHODOLOGY.....6**
- 6. TEST FACILITY7**
- 7. MEASUREMENT UNCERTAINTY7**
- 8. SUPPORT EQUIPMENT8**
- 9. RF OUTPUT POWER9**
- 10. DWELL TIME, MINIMUM FREQUENCY OCCUPATION AND11**
HOPPING SEQUENCE.....11
- 11. OCCUPIED CHANNEL BANDWIDTH.....21**
- 12. HOPPING FREQUENCY SEPARATION.....25**
- 13. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF BAND DOMAIN29**
- 14. TRANSMITTER SPURIOUS EMISSIONS32**
- 15. RECEIVER SPURIOUS EMISSIONS35**
- 16. TEST EQUIPMENT LIST37**
- APPENDIX I38**
- INFORMATION AS REQUIRED BY EN 300 328 V1.9.1, CLAUSE 5.3.138**
- APPENDIX I44**
- PHOTOGRPHS OF TEST SETUP.....44**

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1504127E	Initial Issue	2015-05-13
NTC1504127E-1	Changed model number and updated the edition of the standard	2016-09-22
NTC1504127EV02	Added the model number.	2017-01-11

1. GENERAL INFORMATION

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST

Product Name	: 2.1 Computer Multimedia Speaker
Model Name	: A140X, A140U, A140BT, A140F, A160X, A160BT, A140XF, A111X, A521X, A520X, A530X, A511X, A350X, A522X, A355X (All tests were carried on model A140X.)
Model Difference Description	: These models have the same circuitry, electrical mechanical, PCB layout and physical construction. Their differences in model number due to trading purpose.
Power Supply	: AC 220-240V 50/60Hz, 0.3A
Test Voltage	: AC 230V 50Hz
Operating Temperature Range	: 0°C to 35°C (Declaration by manufacturer)
Note	: <ol style="list-style-type: none">1. This report was an additional report based on original report NTC1504127E-1.2. Both of reports are the same except for the model number.3. The new models and model A140X have the same circuitry, electrical mechanical, PCB Layout and physical construction. Their difference in model number.4. According this change, the original test data were continued to be referenced.

Technical Specification:

Bluetooth Version	: 2.1+EDR
Frequency Range	: 2402-2480MHz
Modulation Type	: GFSK, $\pi/4$ -DQPSK
Modulation Technology	: FHSS
Number of Channel	: 79
Channel Space	: 1MHz
Antenna Type	: PCB
Antenna Gain	: 0dBi (Declaration by manufacturer)
Max RF Output Power	: -4.62 dBm (E.I.R.P.)
Adaptive/Non-Adaptive Equipment	: Adaptive equipment

SUMMARY OF TEST RESULTS		
Section (ETSI EN 300328)	Description of Test	TEST RESULT
4.3.1.2 / 4.3.2.2	RF Output Power	Compliant
4.3.2.3	Power Spectral Density (Modulations other than FHSS equipment)	N/A
4.3.1.3 / 4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap (Non-adaptive equipment)	N/A <i>see note</i>
4.3.1.4	Dwell time, Minimum Frequency Occupation & Hopping Sequence (FHSS equipment)	Compliant
4.3.1.5	Hopping Frequency Separation (FHSS equipment)	Compliant
4.3.1.6 / 4.3.2.5	Medium Utilisation (Non-adaptive equipment)	N/A <i>see note</i>
4.3.1.7 / 4.3.2.6	Adaptivity	N/A <i>see note</i>
4.3.1.8 / 4.3.2.7	Occupied Channel Bandwidth	Compliant
4.3.1.9 / 4.3.2.8	Transmitter unwanted emission in the OOB domain	Compliant
4.3.1.10 / 4.3.2.9	Transmitter unwanted emissions in the spurious domain	Compliant
4.3.1.11 / 4.3.2.10	Receiver spurious emissions	Compliant
4.3.1.12 / 4.3.2.11	Receiver Blocking	N/A <i>see note</i>

Note: These requirements do not apply for equipment with a maximum declared RF Output power of less than 10dBm EIRP or for equipment when operating in a mode where the RF Output power is less than 10dBm EIRP.

2. DESCRIPTION OF TEST MODES

The EUT has been tested under Normal Operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed. All data rate and modulation type were tested, only the worst-case record in this report.

3. TEST FREQUENCIES

Channel	Frequency MHz
0	2402
39	2441
78	2480

Test Item	Software	Description
Conducted RF Testing and Radiated testing	FCCAssist_1.5	Set the EUT to different modulation and channel

4. OBJECTIVE

Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4GHz ISM band and using wide band modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive.

The objective is to determine compliance with ETSI EN 300328 V1.9.1 (2015-02).

5. TEST METHODOLOGY

All measurements contained in this report were conducted with ETSI EN 300328 V1.9.1 (2015-02).

6. TEST FACILITY

Site Description

EMC Lab : Listed by CNAS, August 14, 2015
The certificate is valid until August 13, 2018
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by FCC, July 03, 2014
The Certificate Number is 665078.

Listed by Industry Canada, June 18, 2014
The Certificate Registration Number. Is 46405-9743

Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan
City, Guangdong Province, China

7. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Occupied Channel Bandiwdth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
All emissions, radiated	$\pm 3.70\text{dB}$
Temperature	$\pm 0.8^\circ\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

8. SUPPORT EQUIPMENT

Notebook PC : Manufacturer: IBM Corporation
M/N: R50e
S/N: L3-HZNGO
P/N: 1834KDC

Adapter : Manufacturer: IBM Corporation
M/N: 08K8210
Input: AC100-240V 50/60Hz 0.5-1.0A
Output: DC 16V 4.5A

9. RF OUTPUT POWER

Limits


Frequency Band	Limit
2400 ~ 2483.5 MHz	Equivalent isotropic radiated power (e.i.r.p.) ≤ 20 dBm

Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.2.2.1 for conducted measurement method.
2. The measurements shall be performed at both normal environmental conditions and at The extremes of the operating temperature range.

Test Configuration

Temperature and Voltage Measurement

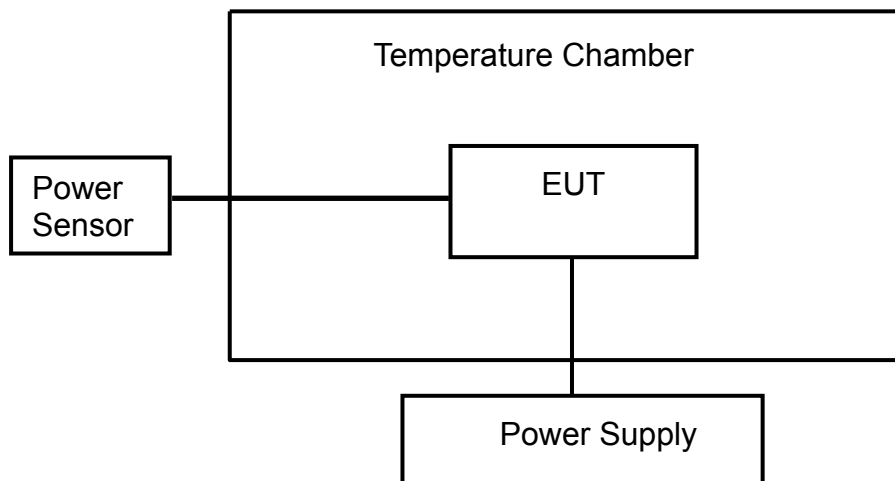

Test Result

Pass.

Please refer to following data tables.

GFSK				
Humidity :	52 %	Temperature :	22 °C	
Test Result:	PASS	Test By:	Sance	
Antenna Assembly Gain:				0dBi
Cable Loss=				1.5dB
Number of Burst				>20
Hopping Mode				
Temperature (°C)	Voltage (V)	Reading dBm	EIRP dBm	Limit dBm
25	AC 230	-6.12	-4.62	20
0	AC 230	-6.34	-4.84	20
35	AC 230	-6.50	-5.00	20

Note: Calculated Power(dBm)=Output Power(dBm)+Cable Loss(dB)+Antenna Gain(dBi)

π/4-DQPSK				
Humidity :	52 %	Temperature :	22 °C	
Test Result:	PASS	Test By:	Sance	
Antenna Assembly Gain:				0dBi
Cable Loss=				1.5dB
Number of Burst				>20
Hopping Mode				
Temperature (°C)	Voltage (V)	Reading dBm	EIRP dBm	Limit dBm
25	AC 230	-6.65	-5.15	20
0	AC 230	-7.49	-5.99	20
35	AC 230	-7.33	-5.83	20

Note: Calculated Power(dBm)=Output Power(dBm)+Cable Loss(dB)+Antenna Gain(dBi)

10. DWELL TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE

Limits

Dwell Time	
Test Condition	Limit
Non-adaptive frequency hopping systems	≤ 15 ms
Adaptive frequency hopping systems	≤ 400 ms

Minimum Frequency Occupation Time	
Test Condition	Limit
Non-adaptive frequency hopping systems	Equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.
Adaptive frequency hopping systems	

Hopping sequence(s)	
Test Condition	Limit
Non-adaptive frequency hopping systems	≥ 15 hopping frequencies or 15/minimum Hopping Frequency Separation in MHz , whichever is the greater.
Adaptive frequency hopping systems	Operating frequency band ≥ 58.45 MHz (Operating over a minimum of 70 % of the operating in the band 2,4 GHz to 2,4835 GHz)
	≥ 15 hopping frequencies or 15/minimum Hopping Frequency Separation in MHz , whichever is the greater.

Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.4.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

Test Configuration



Test Result

Pass.

Please refer to following data tables and test plots.

Temperature : 22 °C Humidity : 53%
 Test Date : September 07, 2016 Test Result: PASS
 Test By: Sance


Hopping Sequence				
Hopping Channels	Hopping Channels Limits	Min. Hopping Range (%)	Min. Hopping Range Limit(%)	Result
GFSK				
79	15	95.51	70.00%	PASS
$\pi/4$-DQPSK				
79	15	95.91	70.00%	PASS

Dwell Time						
Mode	Number of Hopping Channel	Number of transmission in a period (channel number *0.4sec		Dwell Time	Limit (ms)	Result
		Period (Sec)	Sweep time (Sec)			
GFSK						
DH1	79	31.6	4	340.00	400	PASS
DH3	79	31.6	4	352.44	400	PASS
DH5	79	31.6	4	355.88	400	PASS
$\pi/4$-DQPSK						
DH1	79	31.6	4	45.88	400	PASS
DH3	79	31.6	4	246.24	400	PASS
DH5	79	31.6	4	307.09	400	PASS


Minimum Frequency Occupation				
Mode	Number of Hopping Channel	Number of transmission in a period of 4*Dwell time*number of hopping channel	Minimum Limit (ms)	Result (Pass/Fail)
GFSK				
DH1	79	7	≥ 1	PASS
DH3	79	1	≥ 1	PASS
DH5	79	1	≥ 1	PASS
$\pi/4$-DQPSK				
DH1	79	2	≥ 1	PASS
DH3	79	2	≥ 1	PASS
DH5	79	6	≥ 1	PASS

GFSK DH1

Dwell Time

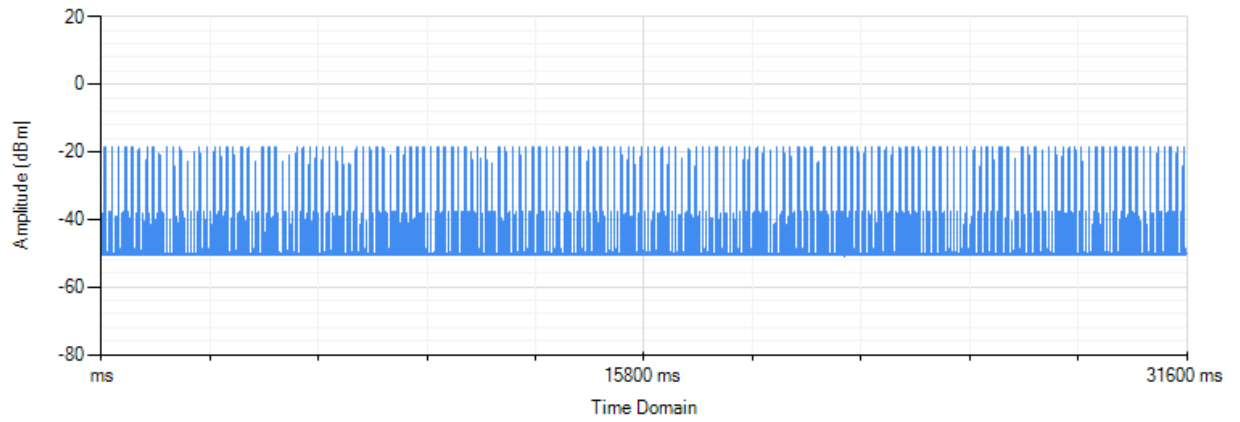


Minimum Frequency Occupation

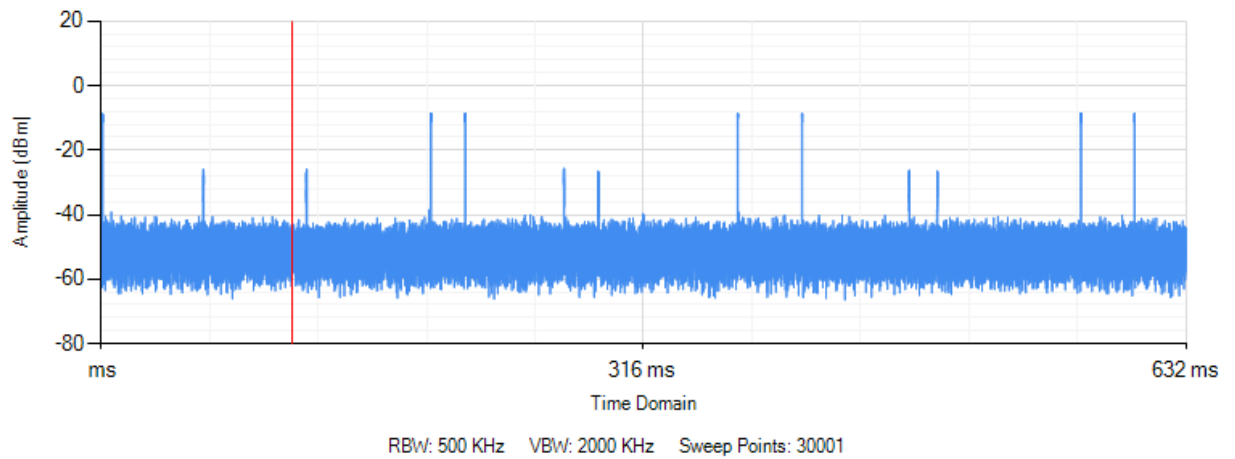


GFSK DH3

Dwell Time

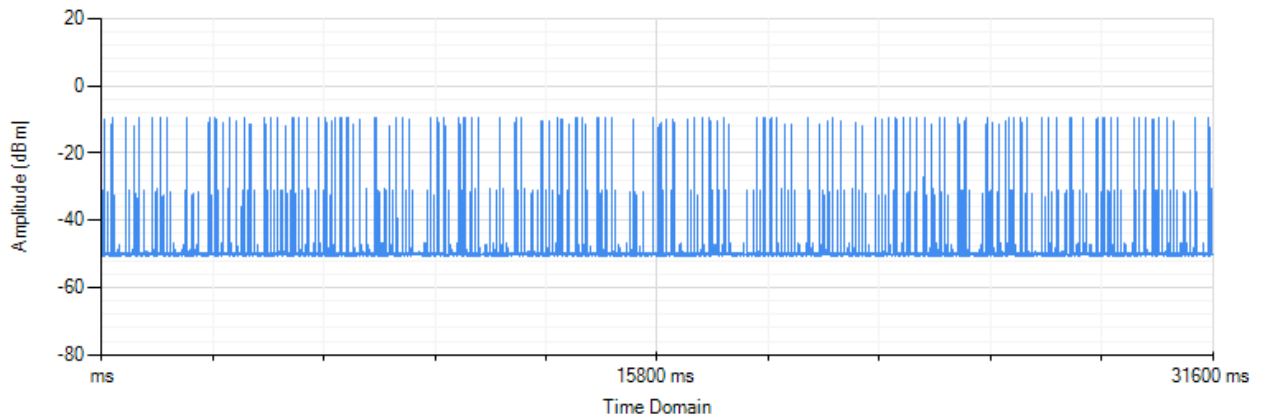

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001


Minimum Frequency Occupation

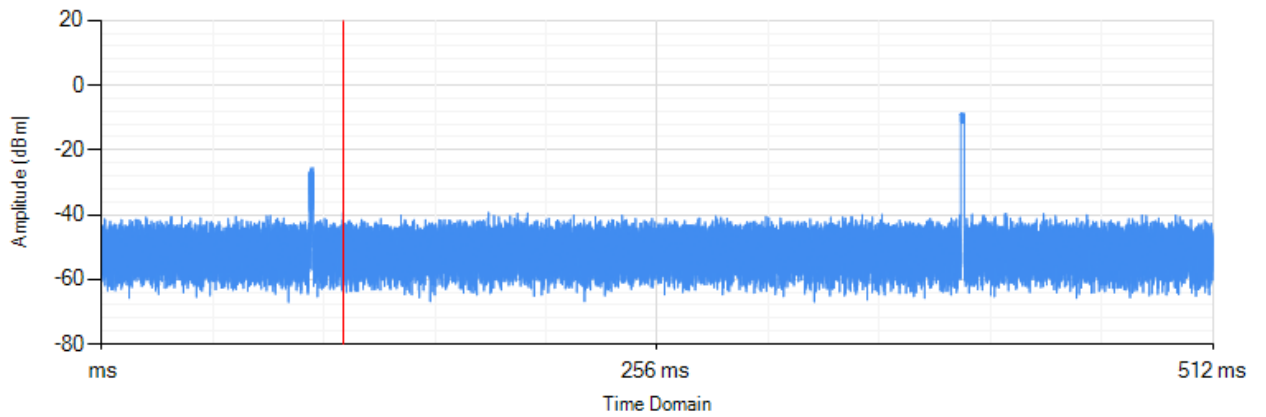

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001


GFSK DH5

Dwell Time

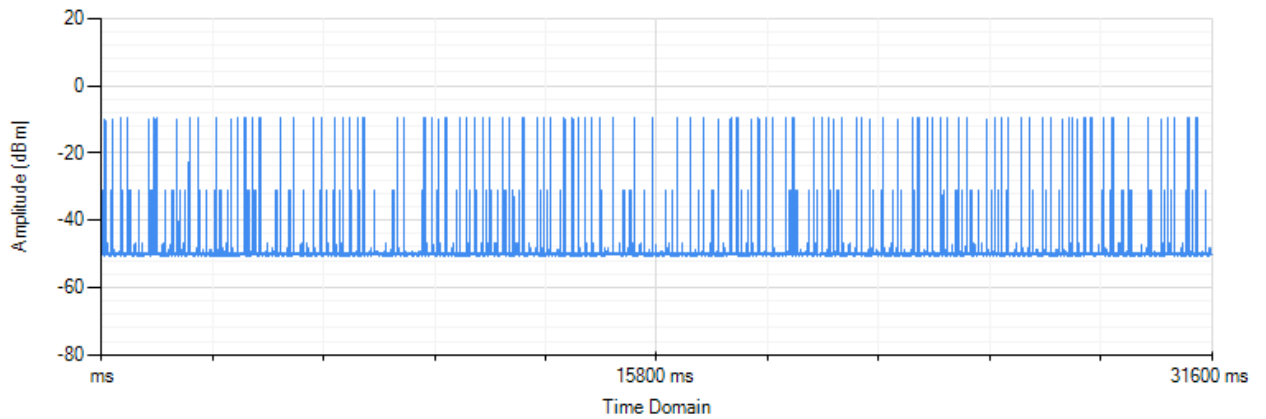



RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001

Minimum Frequency Occupation

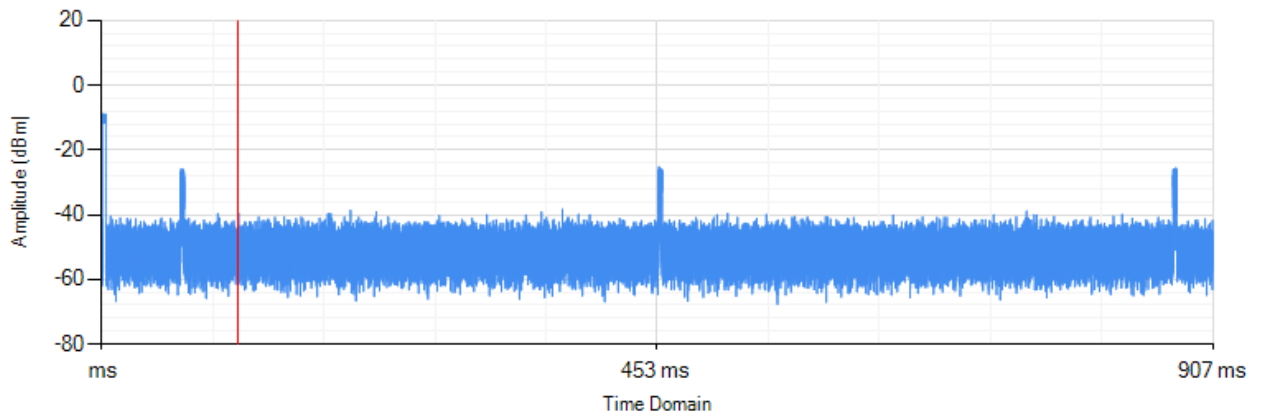


RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001


$\pi/4$ -DQPSK DH1

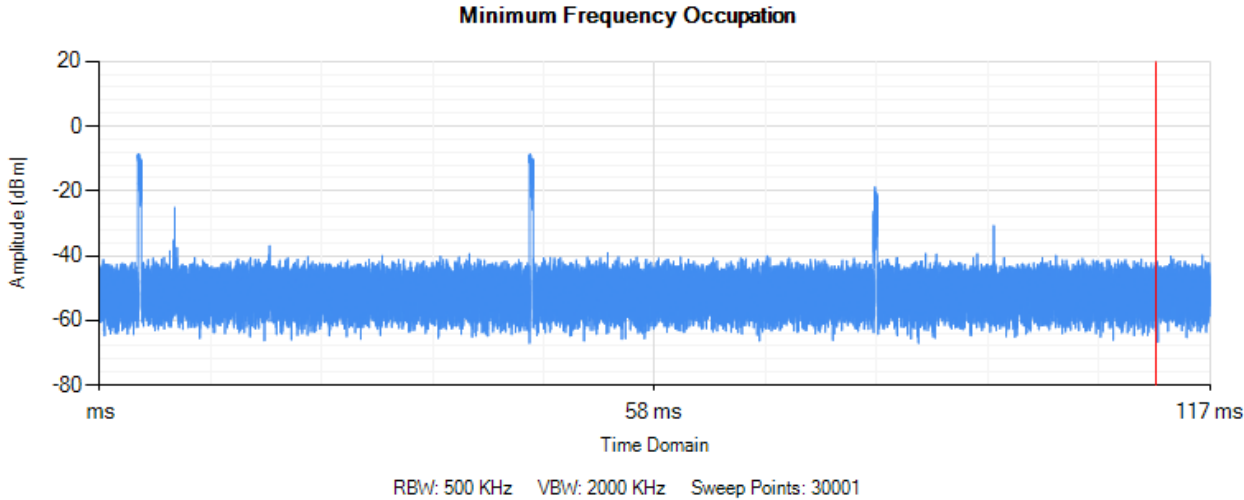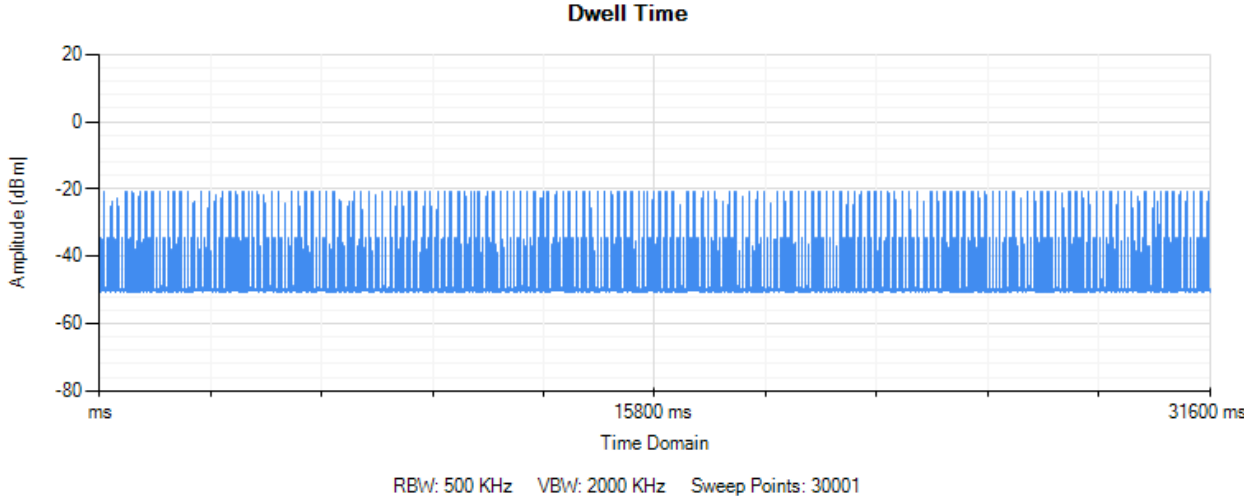

$\pi/4$ -DQPSK DH3

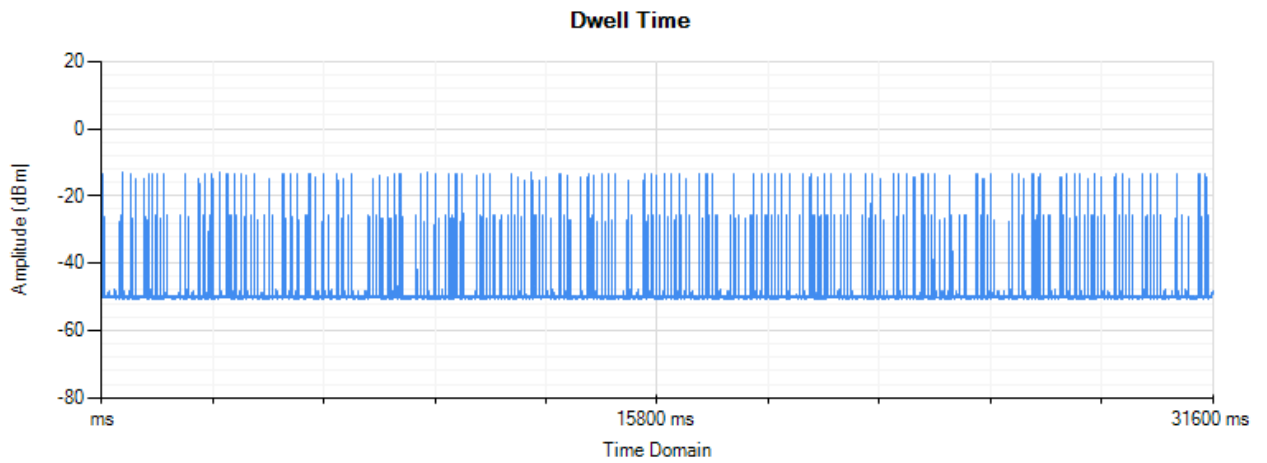


RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001

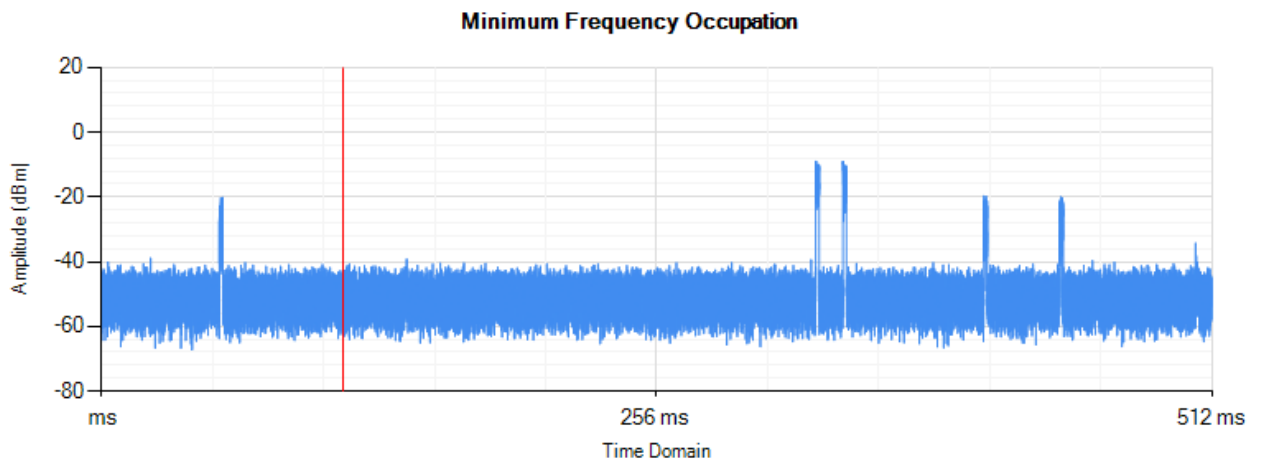

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001


$\pi/4$ -DQPSK DH5

Dwell Time

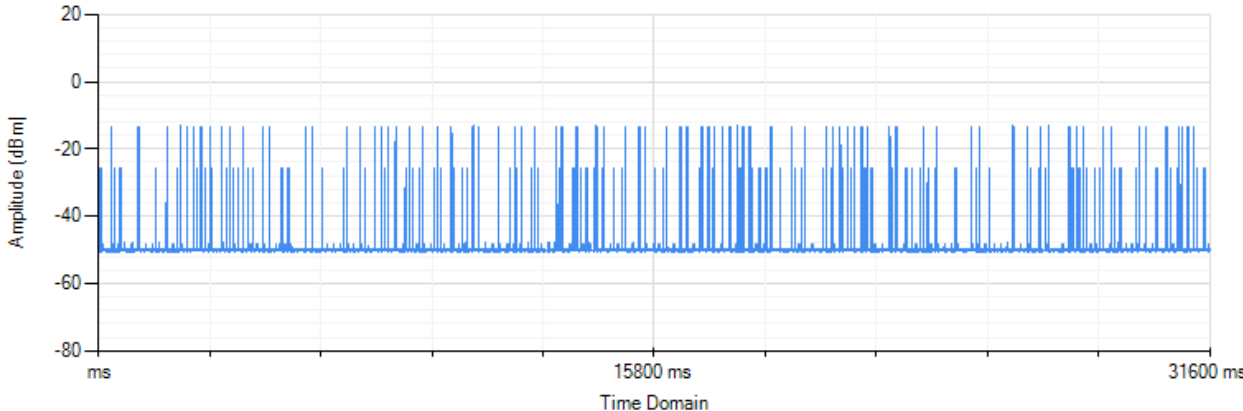

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001


Minimum Frequency Occupation

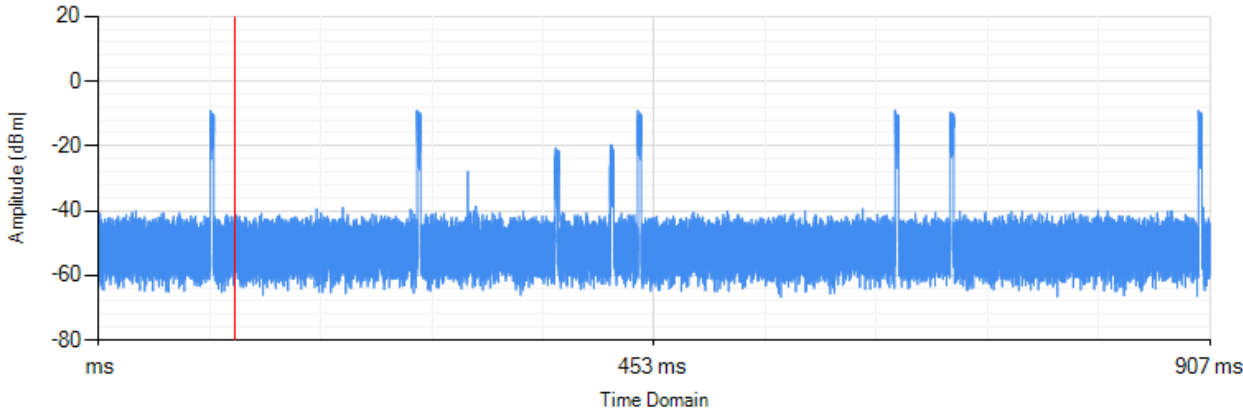

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 30001

Hopping Sequence GFSK


Hopping Sequence

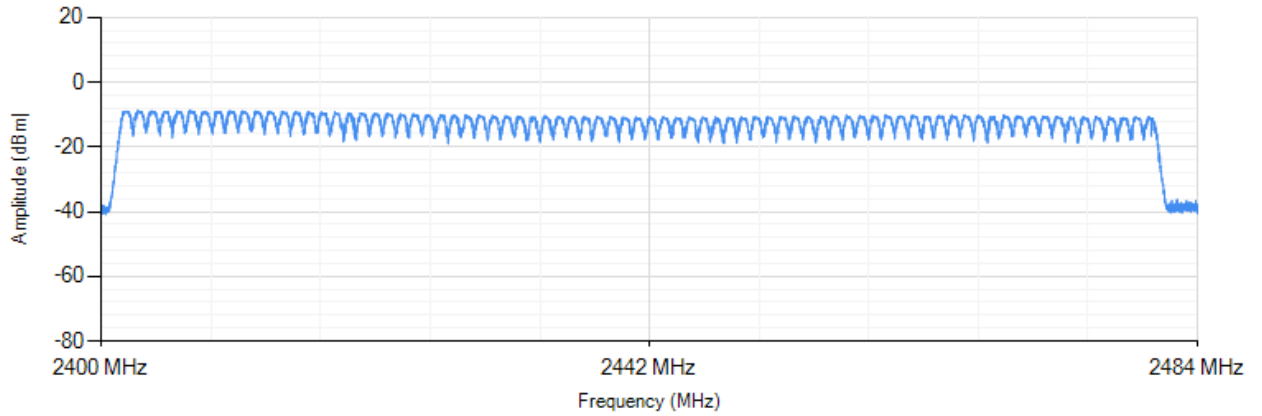

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 5001

$\pi/4$ -DQPSK

Hopping Sequence

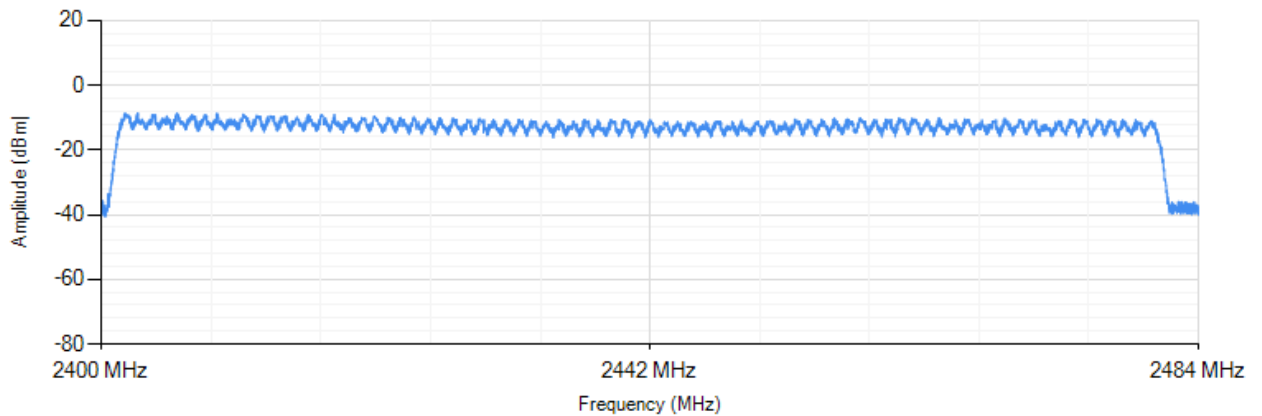

RBW: 500 KHz VBW: 2000 KHz Sweep Points: 5001

11. OCCUPIED CHANNEL BANDWIDTH

Limits

Condition	Limit
All types of equipment	Shall fall completely within the band 2400 to 2483.5 MHz
For non-adaptive using wide band modulations other than FHSS system and e.i.r.p > 10dBm	Less than 20MHz
For non-adaptive Frequency Hopping system and e.i.r.p > 10dBm	Less than 5MHz

Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.8.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

Test Configuration



Test Result

Pass.

Please refer to following data tables and test plots.


Temperature : 22 °C Humidity : 53%
 Test Date : September 07, 2016 Test Result: PASS
 Test By: Sance

Channel frequency (MHz)	99% Bandwidth (KHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Limit	Result
GFSK					
2402	830	2401.47	2402.30	FL > 2.4 GHz and FH < 2.4835 GHz	Pass
2480	830	2479.46	2480.30		Pass
$\pi/4$-DQPSK					
2402	1170	2401.30	2402.48	FL > 2.4 GHz and FH < 2.4835 GHz	Pass
2480	1170	2479.29	2480.47		Pass

Note: FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
 FH is the highest frequency of the 99% occupied bandwidth of power envelope.

GFSK Lowest Channel


Occupied Channel Bandwidth

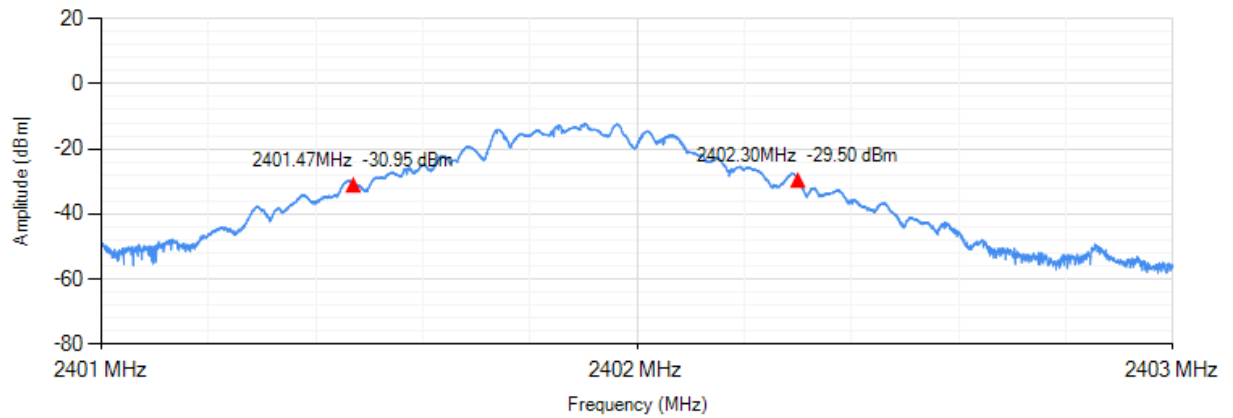

RBW: 20 KHz VBW: 50 KHz Sweep Points: 5001

GFSK Highest Channel


Occupied Channel Bandwidth

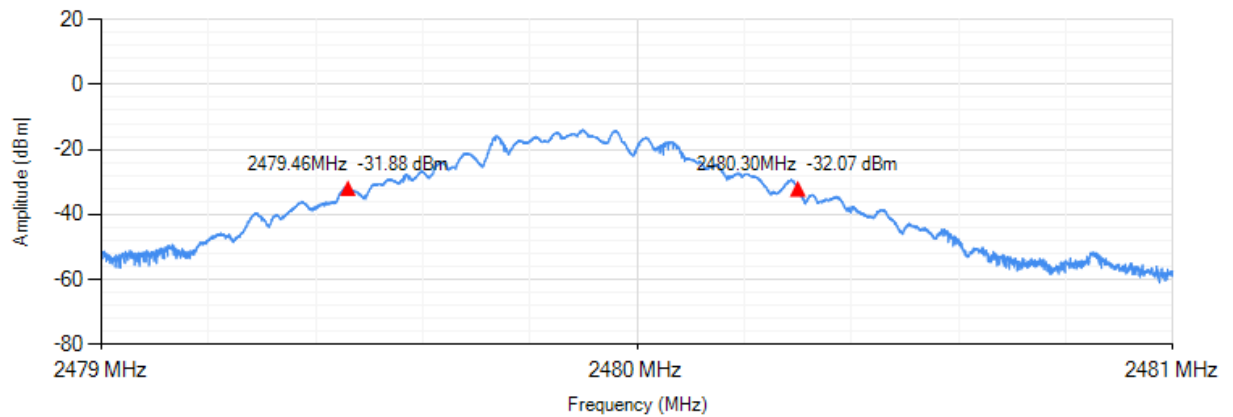

RBW: 20 KHz VBW: 50 KHz Sweep Points: 5001


$\pi/4$ -DQPSK Lowest Channel

Occupied Channel Bandwidth

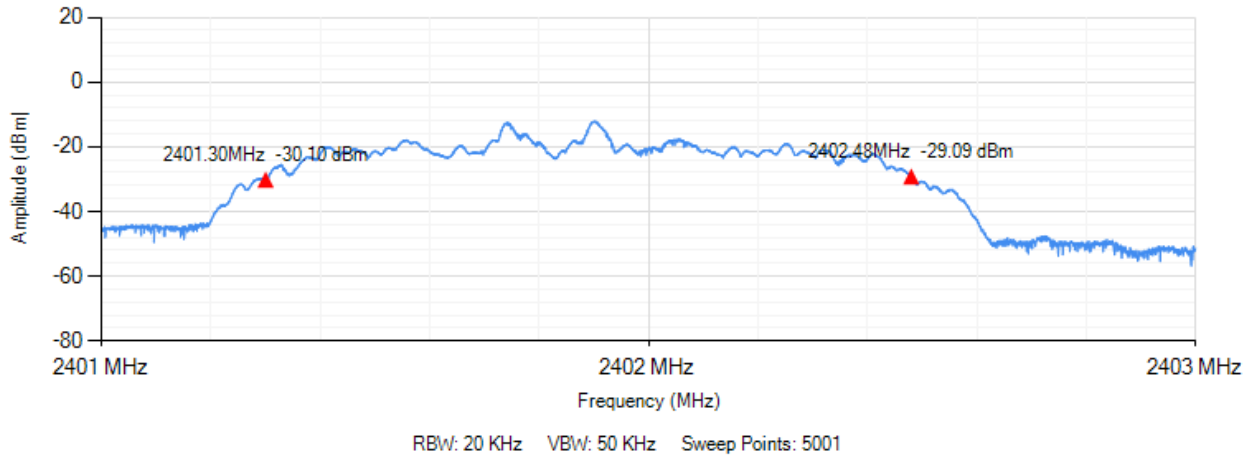

$\pi/4$ -DQPSK Highest Channel

Occupied Channel Bandwidth

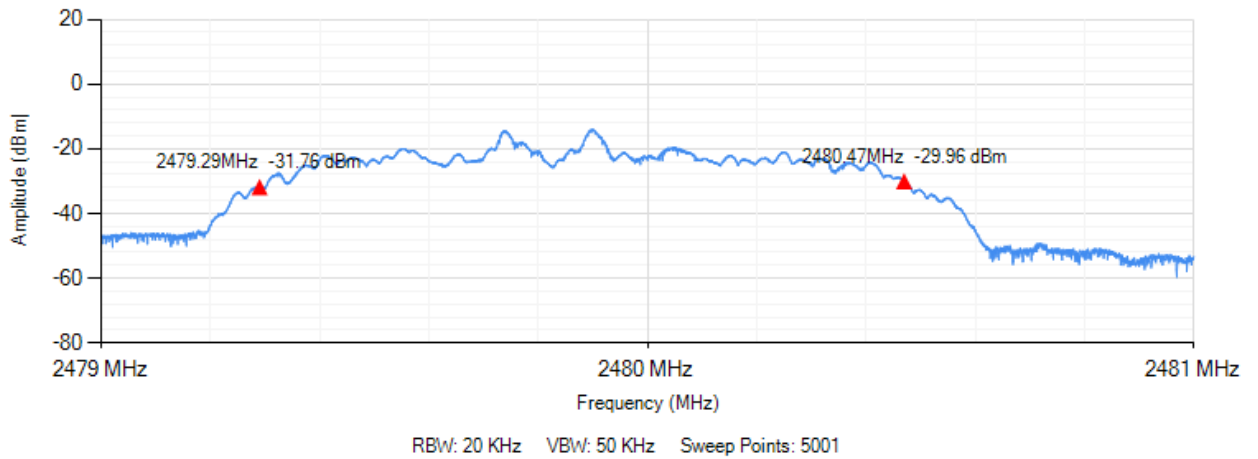

12. HOPPING FREQUENCY SEPARATION

Limits

Condition	Limit
Nom-adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth of a single hop, with a minimum separation of 100 kHz.
Adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be 100 kHz.

Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.5.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

Test Configuration



Test Result

Pass.


Please refer to following data tables and test plots.

Temperature : 22 °C Humidity : 53%
Test Date : September 07, 2016 Test Result: PASS
Test By: Sance

Channel frequency (MHz)	Channel Separation (KHz)	Limit (MHz) Minimum	Result
GFSK			
2402	1000	0.1	Pass
2480	1000	0.1	Pass
$\pi/4$-DQPSK			
2402	1150	0.1	Pass
2480	1000	0.1	Pass


GFSK Lowest Channel

Hopping Frequency Separation

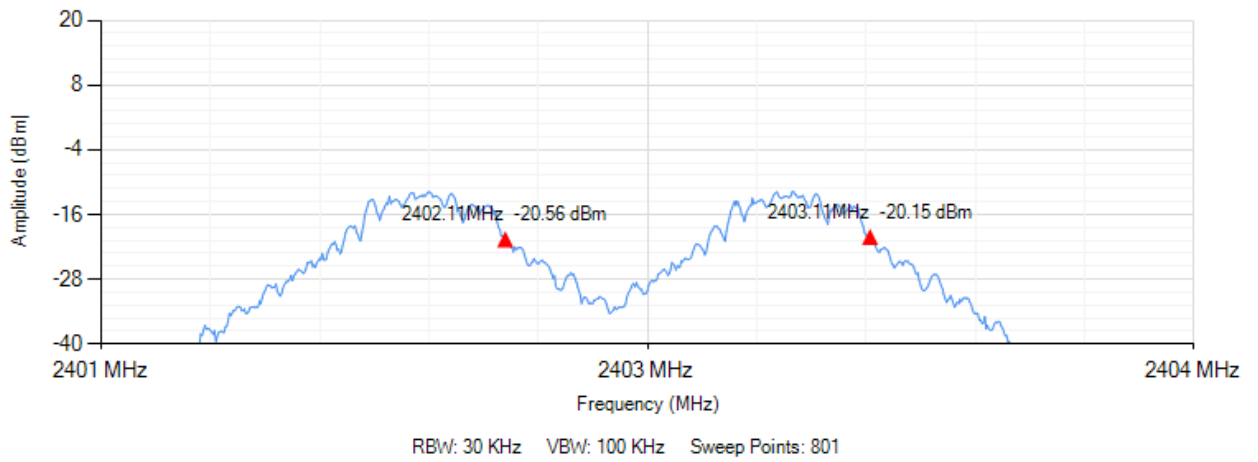


GFSK Highest Channel

Hopping Frequency Separation

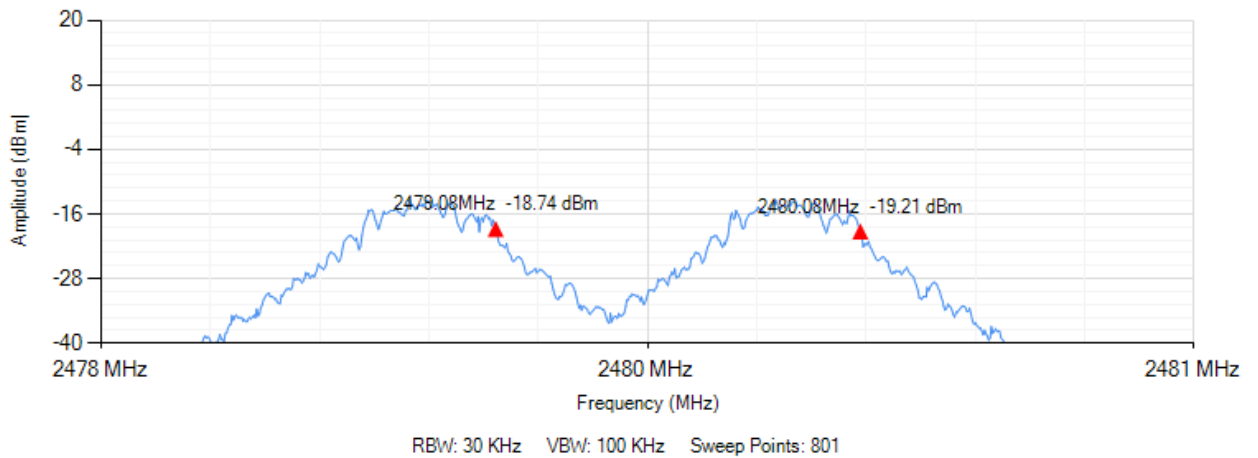


$\pi/4$ -DQPSK

Hopping Frequency Separation

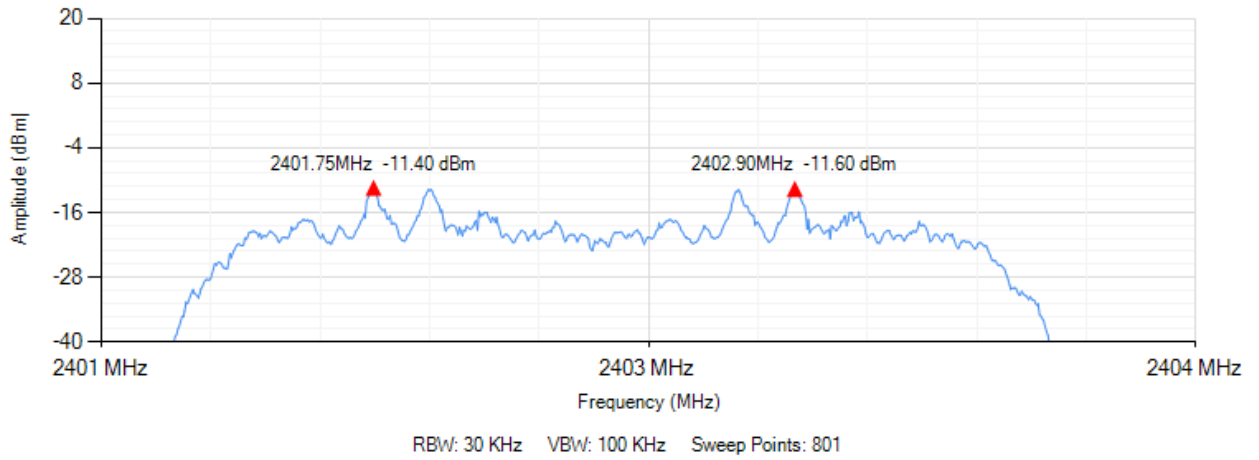

$\pi/4$ -DQPSK

Hopping Frequency Separation

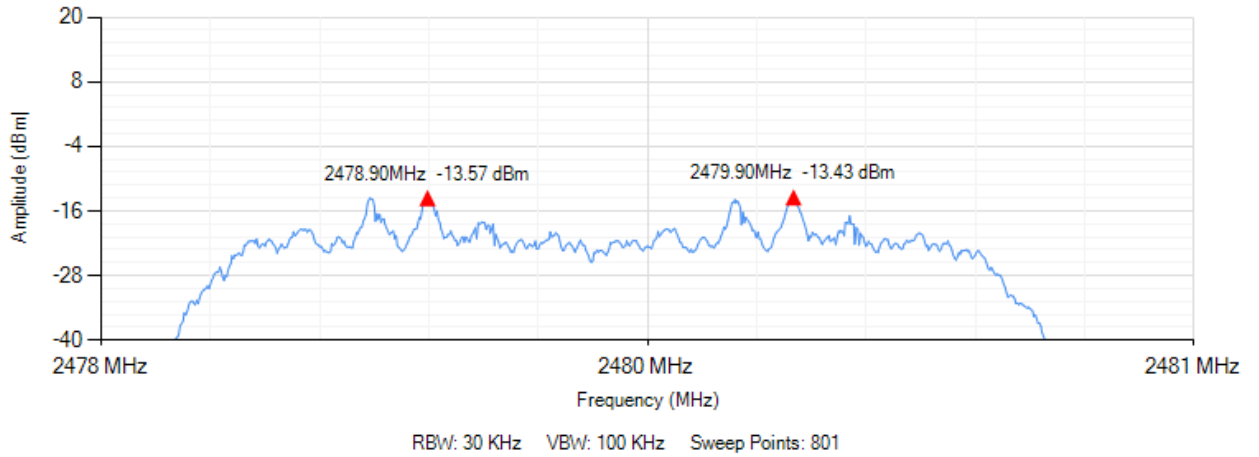


13. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

Limits

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask

Transmit mask

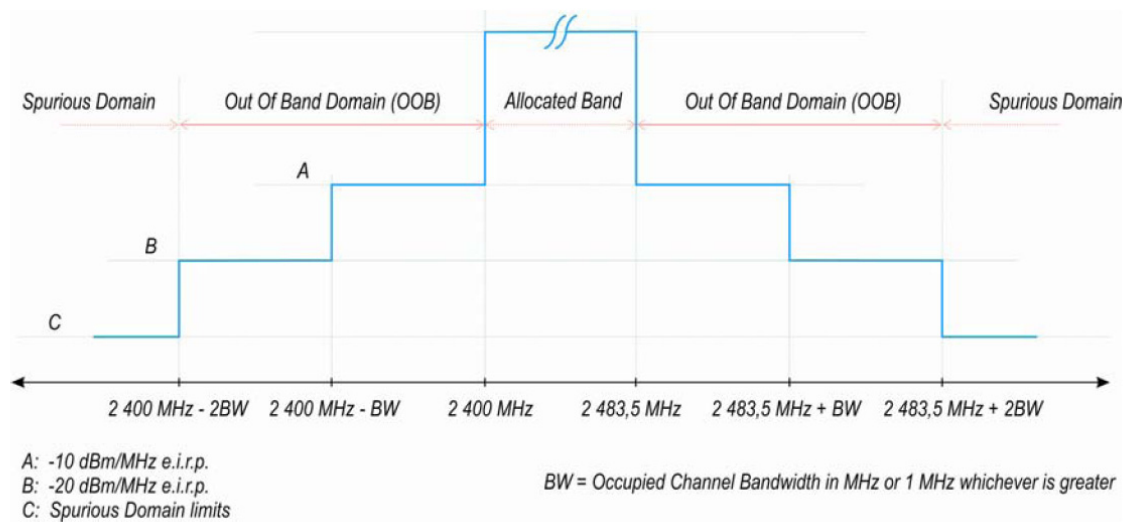


Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.9.2.1 for conducted measurement method.
2. The measurements shall be performed at both normal environmental conditions and at The extremes of the operating temperature range.

Test Configuration

Temperature and Voltage Measurement

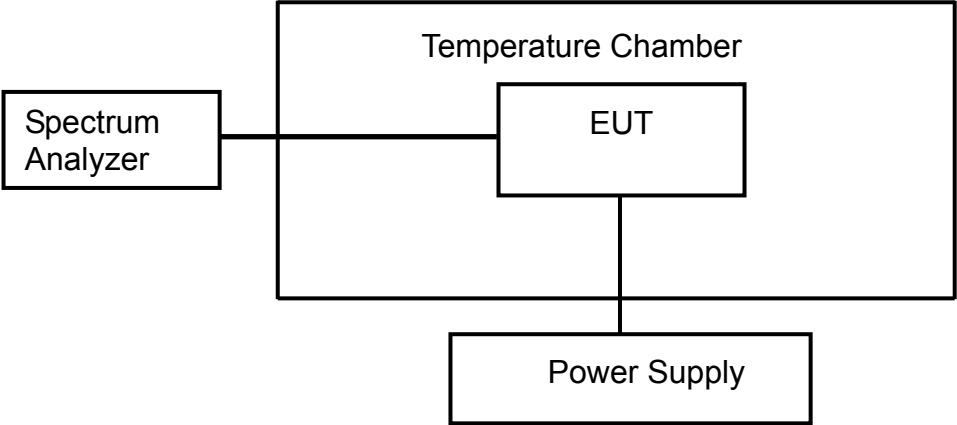

Test Result

Pass.

Please refer to following data tables.

Temperature : 22 °C Humidity : 53%
 Test Date : September 07, 2016 Test Result: PASS
 Test By: Sance

Condition		2400-BW~2400 / 2483.5+BW ~2483.5 (dBm/MHz)	Limit (dBm/MHz)	2400-2*BW~2400-BW / 2483.5+2*BW ~2483.5+BW (dBm/MHz)	Limit (dBm/MHz)	Result
Temperature (°C)	Voltage V					
GFSK (2402MHz)						
25	AC230	-39.044	-10	-47.454	-20	PASS
0	AC230	-39.048	-10	-47.459	-20	PASS
35	AC230	-39.126	-10	-47.654	-20	PASS
GFSK (2480MHz)						
25	AC230	-57.894	-10	-61.294	-20	PASS
0	AC230	-57.896	-10	-61.296	-20	PASS
35	AC230	-57.913	-10	-61.299	-20	PASS
$\pi/4$-DQPSK (2402MHz)						
25	AC230	-38.824	-10	-46.144	-20	PASS
0	AC230	-38.829	-10	-46.241	-20	PASS
35	AC230	-38.834	-10	-46.239	-20	PASS
$\pi/4$-DQPSK (2480MHz)						
25	AC230	-58.654	-10	-61.414	-20	PASS
0	AC230	-58.659	-10	-61.418	-20	PASS
35	AC230	-58.667	-10	-61.526	-20	PASS

14. TRANSMITTER SPURIOUS EMISSIONS

Limits:

The transmitter unwanted emissions in the spurious domain shall not exceed the values.


Frequency Range	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
30 MHz to 47MHz	-36 dBm	100KHz
47 MHz to 74MHz	-54 dBm	100KHz
74 MHz to 87.5MHz	-36 dBm	100KHz
87.5 MHz to 118MHz	-54 dBm	100KHz
118 MHz to 174MHz	-36 dBm	100KHz
174 MHz to 230MHz	-54 dBm	100KHz
230 MHz to 470MHz	-36 dBm	100KHz
470 MHz to 862MHz	-54 dBm	100KHz
862 MHz to 1GHz	-36 dBm	100KHz
1GHz to 12.75GHz	-30 dBm	1MHz

Test Method


1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.10.2.2 for radiated measurement method.
2. The measurements shall be performed at normal environmental condition.

Test Configuration

Below 1GHz

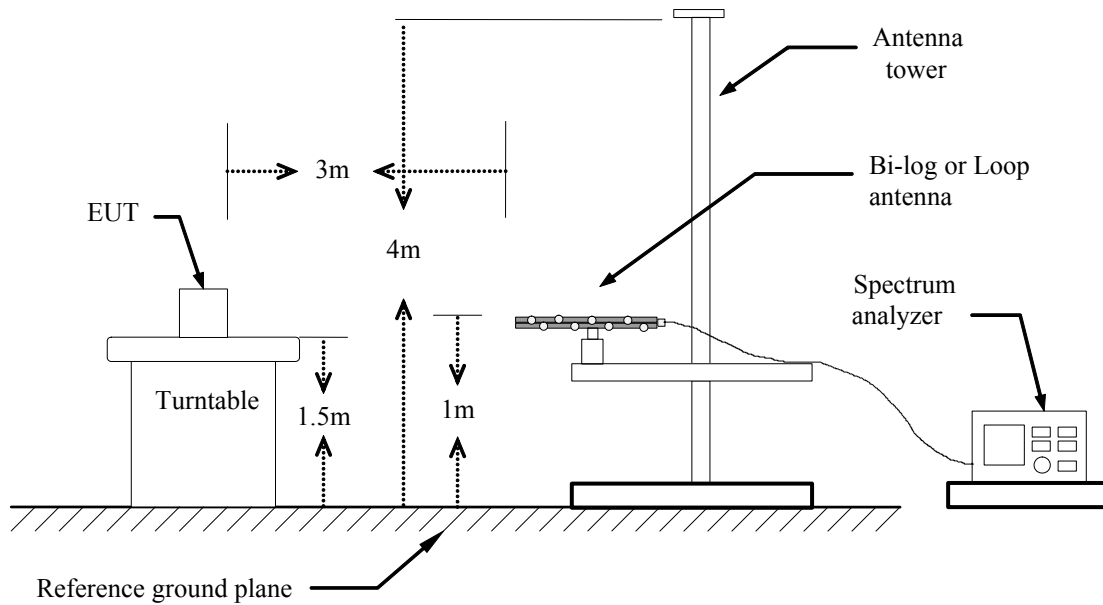

Above 1GHz

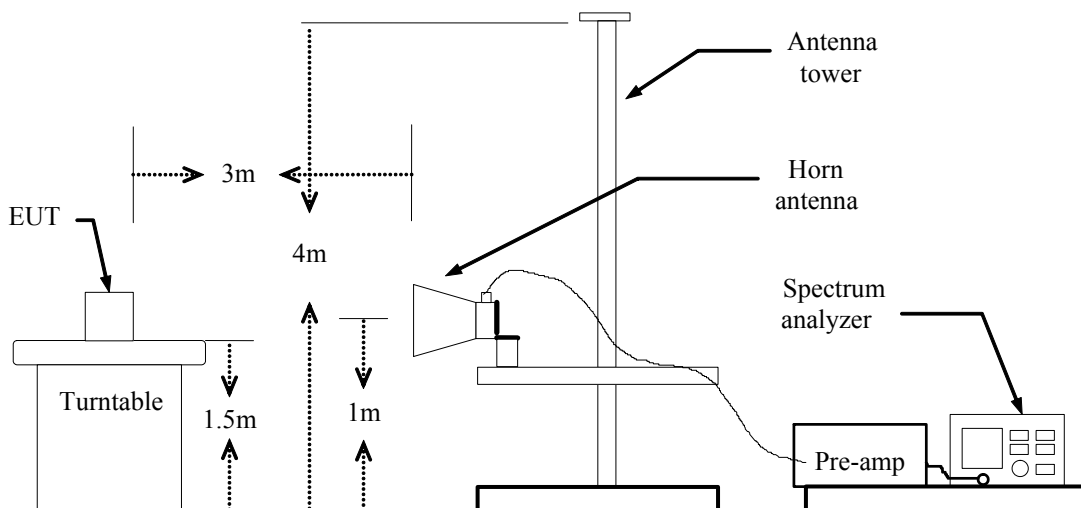

Test Result

Pass.

Please refer to following data tables (The worst case GFSK)

Below 1GHz Hopping				
Humidity : 54 %		Temperature : 22 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
480.0799	Vertical	-63.99	-54.00	-9.99
512.0900	Vertical	-64.65	-54.00	-10.65

576.1100	Horizontal	-61.61	-54.00	-7.61
640.1299	Horizontal	-60.13	-54.00	-6.13
768.1698	Horizontal	-60.01	-54.00	-6.01

Above 1GHz Hopping				
Humidity : 54 %		Temperature : 22 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4804	Vertical	-45.13	-30	-15.13
7206	Vertical	-42.61	-30	-12.61

4804	Horizontal	-45.71	-30	-15.71
7206	Horizontal	-42.36	-30	-12.36

- Note:**
1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)
 2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 3. The Test frequency range is 30MHz to12.75GHz.

15. RECEIVER SPURIOUS EMISSIONS

Limits

Frequency Range	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
30 MHz to 1GHz	-57 dBm	100KHz
1GHz to 12.75GHz	-47 dBm	1MHz

Test Method

1. Please refer to ETSI EN 300328 (V_{1.9.1}) clause 5.3.11.2.2 for radiated measurement method.
2. The measurements shall be performed at normal environmental condition.

Test Configuration

Same as section 14 in this test report.

Test Result

Pass.

Please refer to following data tables (the worst case GFSK).

Below 1GHz Hopping				
Humidity : 54 %		Temperature : 22 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
512.0900	Vertical	-64.39	-57.00	-7.39
640.1300	Vertical	-63.65	-57.00	-6.65

576.1100	Horizontal	-62.28	-57.00	-5.28
640.1299	Horizontal	-61.16	-57.00	-4.16
768.1698	Horizontal	-61.03	-57.00	-4.03
--				

Above 1GHz Hopping				
Humidity : 50 %		Temperature : 23 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4804	Vertical	-54.34	-47	-7.34
7206	Vertical	-50.56	-47	-3.56

4804	Horizontal	-56.78	-47	-9.78
7206	Horizontal	-52.69	-47	-5.69

- Note:**
1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)
 2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 3. The Test frequency range is 30MHz to12.75GHz.

16. TEST EQUIPMENT LIST

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 07, 2016	Mar. 07, 2017
DC Power Source	HUA YI	HY5003-2	N/A	Nov.03, 2015	Nov.02, 2016
Temperature & Humidity Chamber	HAIDA	DH-225T	N/A	Nov.05, 2015	Nov.04, 2016
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 07, 2016	Mar. 07, 2017
Horn Antenna	COM-Power	AH-118	071078	Mar. 07, 2016	Mar. 07, 2017
Pre-Amplifier	COM-Power	PAM-118	443007	Mar. 07, 2016	Mar. 07, 2017
Broadband Antenna	Schwarzbeck	VULB9162	9162-010	Apr. 25, 2016	Apr. 25, 2017
Pre-Amplifier	Agilent	8449B	3008A02964	Mar. 07, 2016	Mar. 07, 2017
Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 07, 2016	Mar. 07, 2017
Power Sensor	DARE	RPR3006 W	15I00041SN O64	Mar. 07, 2016	Mar. 06, 2017
Test Software	Acentest	AT890-SW	N/A	N/A	N/A

APPENDIX I

INFORMATION AS REQUIRED BY EN 300 328 V1.9.1, CLAUSE 5.3.1

In accordance with EN 300 328, clause 5.3.1, the following information is provided by the supplier.

a) The type of modulation used by the equipment:	<input type="checkbox"/> FHSS <input checked="" type="checkbox"/> other forms of modulation
b) In case of FHSS modulation:	<ul style="list-style-type: none"> • In case of non-Adaptive Frequency Hopping equipment: The number of Hopping Frequencies: _____ • In case of Adaptive Frequency Hopping Equipment: The maximum number of Hopping Frequencies: <u>79</u> The minimum number of Hopping Frequencies: _____ • The (Average) Dwell Time: <u>323.545ms</u>
c) Adaptive / non-adaptive equipment:	<input checked="" type="checkbox"/> non-adaptive Equipment <input type="checkbox"/> adaptive Equipment without the possibility to switch to a non-adaptive mode <input checked="" type="checkbox"/> adaptive Equipment which can also operate in a non-adaptive mode
d) In case of adaptive equipment:	<p>The Channel Occupancy Time implemented by the equipment: _____ ms</p> <input checked="" type="checkbox"/> The equipment has implemented an LBT based DAA mechanism
e) In case of non-adaptive Equipment:	<p>• In case of equipment using modulation different from FHSS: <input checked="" type="checkbox"/> The equipment is Frame Based equipment <input checked="" type="checkbox"/> The equipment is Load Based equipment <input checked="" type="checkbox"/> The equipment can switch dynamically between Frame Based and Load Based equipment</p> <p>The CCA time implemented by the equipment: _____ μs</p> <input checked="" type="checkbox"/> The equipment has implemented an non-LBT based DAA mechanism <input checked="" type="checkbox"/> The equipment can operate in more than one adaptive mode
	<p>The maximum RF Output Power (e.i.r.p.): _____ dBm</p>
	<p>The maximum (corresponding) Duty Cycle: _____ %</p>
	<p>Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and orresponding power levels to be declared):</p>
f) The worst case operational mode for each of the following tests:	<ul style="list-style-type: none"> • RF Output Power <u>GFSK</u> • Power Spectral Density <u>N/A</u> • Duty cycle, Tx-Sequence, Tx-gap <u>N/A</u> • Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment) <u>GFSK</u> • Hopping Frequency Separation (only for FHSS equipment) <u>$\pi/4$-DQPSK</u> • Medium Utilisation <u>N/A</u> • Adaptivity & Receiver Blocking <u>N/A</u> • Nominal Channel Bandwidth <u>$\pi/4$-DQPSK</u> • Transmitter unwanted emissions in the OOB domain <u>GFSK</u> • Transmitter unwanted emissions in the spurious domain <u>GFSK</u> • Receiver spurious emissions <u>GFSK</u>

g) The different transmit operating modes (tick all that apply):	<input checked="" type="checkbox"/> Operating mode 1: Single Antenna Equipment <input type="checkbox"/> Equipment with only 1 antenna <input checked="" type="checkbox"/> Equipment with 2 diversity antennas but only 1 antenna active at any moment in time <input checked="" type="checkbox"/> Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
	<input checked="" type="checkbox"/> Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming <input checked="" type="checkbox"/> Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode) <input checked="" type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1 <input checked="" type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2 NOTE: Add more lines if more channel bandwidths are supported.
	<input checked="" type="checkbox"/> Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming <input checked="" type="checkbox"/> Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode) <input checked="" type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1 <input checked="" type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2 NOTE: Add more lines if more channel bandwidths are supported.
h) In case of Smart Antenna Systems:	•The number of Receive chains: _____
	•The number of Transmit chains: _____ <input checked="" type="checkbox"/> symmetrical power distribution <input checked="" type="checkbox"/> asymmetrical power distribution
	In case of beam forming, the maximum beam forming gain: _____ NOTE: Beam forming gain does not include the basic gain of a single antenna.
i) Operating Frequency Range(s) of the equipment:	•Operating Frequency Range 1: <u>2402</u> MHz to <u>2480</u> MHz •Operating Frequency Range 2: _____ MHz to _____ MHz NOTE: Add more lines if more Frequency Ranges are supported.
j) Occupied Channel Bandwidth(s):	•Nominal Channel Bandwidth 1: <u>830</u> KHz •Nominal Channel Bandwidth 2: <u>1170</u> KHz NOTE: Add more lines if more channel bandwidths are supported.
k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.): Stand-alone	<input type="checkbox"/> Stand-alone <input checked="" type="checkbox"/> Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment) <input checked="" type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems) <input checked="" type="checkbox"/> Other _____

<p>l) The extreme operating conditions that apply to the equipment:</p>	<p>Operating temperature range: <u> 0 </u> °C to <u> 35 </u> °C</p> <hr/> <p>Details provided are for the:</p> <p><input type="checkbox"/> stand-alone equipment</p> <p><input checked="" type="checkbox"/> combined (or host) equipment</p> <p><input checked="" type="checkbox"/> test jig</p>																																								
<p>m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:</p>	<p>•Antenna Type: <input checked="" type="checkbox"/> PCB Antenna: Antenna Gain: <u> 0 </u> dBi If applicable, additional beamforming gain (excluding basic antenna gain): <u> </u> dB</p> <p><input checked="" type="checkbox"/> Temporary RF connector provided</p> <p><input checked="" type="checkbox"/> No temporary RF connector provided</p> <hr/> <p><input checked="" type="checkbox"/> Dedicated Antennas (equipment with antenna connector)</p> <p><input checked="" type="checkbox"/> Single power level with corresponding antenna(s)</p> <p><input checked="" type="checkbox"/> Multiple power settings and corresponding antenna(s)</p> <p style="margin-left: 40px;">Number of different Power Levels: <u> </u></p> <p style="margin-left: 40px;">Power Level 1: <u> </u> dBm</p> <p style="margin-left: 40px;">Power Level 2: <u> </u> dBm</p> <p style="margin-left: 40px;">Power Level 3: <u> </u> dBm</p> <p>NOTE 1: Add more lines in case the equipment has more power levels.</p> <p>NOTE 2: These power levels are conducted power levels (at antenna connector).</p> <p>• For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable</p> <p>Power Level 1: <u> </u></p> <p>Number of antenna assemblies provided for this power level:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-left: 20px;"> <thead> <tr> <th style="width: 15%;">Assembly #</th> <th style="width: 20%;">Gain (dBi)</th> <th style="width: 20%;">e.i.r.p.(dBm)</th> <th style="width: 45%;">Part number or model name</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">1</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">2</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">3</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">4</td><td></td><td></td><td></td></tr> </tbody> </table> <p>Note: Add more rows in case more antenna assemblies are supported for this power level.</p> <p>Power Level 2: <u> </u></p> <p>Number of antenna assemblies provided for this power level:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-left: 20px;"> <thead> <tr> <th style="width: 15%;">Assembly #</th> <th style="width: 20%;">Gain (dBi)</th> <th style="width: 20%;">e.i.r.p.(dBm)</th> <th style="width: 45%;">Part number or model name</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">1</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">2</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">3</td><td></td><td></td><td></td></tr> <tr><td style="text-align: center;">4</td><td></td><td></td><td></td></tr> </tbody> </table> <p>Note: Add more rows in case more antenna assemblies are supported for this power level.</p>	Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name	1				2				3				4				Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name	1				2				3				4			
Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name																																						
1																																									
2																																									
3																																									
4																																									
Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name																																						
1																																									
2																																									
3																																									
4																																									


	<p>Power Level 3: _____ Number of antenna assemblies provided for this power level:</p> <table border="1" data-bbox="523 320 1422 535"> <thead> <tr> <th>Assembly #</th> <th>Gain (dBi)</th> <th>e.i.r.p.(dBm)</th> <th>Part number or model name</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Note: Add more rows in case more antenna assemblies are supported for this power level.</p>	Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name	1				2				3				4			
Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name																		
1																					
2																					
3																					
4																					
<p>n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:</p>	<p>Details provided are for the: <input type="checkbox"/> stand-alone equipment <input checked="" type="checkbox"/> combined (or host) equipment <input checked="" type="checkbox"/> test jig</p> <p>Supply Voltage <input type="checkbox"/> AC mains State AC voltage _____ 230 _____ V <input checked="" type="checkbox"/> DC State DC voltage _____</p> <p>In case of DC, indicate the type of power source</p> <p><input checked="" type="checkbox"/> Internal Power Supply <input checked="" type="checkbox"/> External Power Supply or AC/DC adapter <input checked="" type="checkbox"/> Battery <input checked="" type="checkbox"/> Other: _____</p>																				
<p>o) Describe the test modes available which can facilitate testing:</p>	<p>The EUT provides TX Mode to control RF signal transmission</p>																				
<p>p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):</p>	<p>Bluetooth®</p>																				
<p>q) If applicable, the statistical analysis referred to in clause 5.3.1 q)</p>	<p>(to be provided as separate attachment)</p>																				
<p>r) If applicable, the statistical analysis referred to in clause 5.3.1 r)</p>	<p>(to be provided as separate attachment)</p>																				
<p>s) Geo-location capability supported by the equipment:</p>	<p><input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user. <input checked="" type="checkbox"/> No</p>																				

E.2 Combination for testing	Highest overall e.i.r.p. value: <u> -4.62 </u> dBm
	Corresponding Antenna assembly gain: <u> 0 </u> dBi
	Corresponding conducted power setting: (also the power level to be used for testing) _____ dBm
	Antenna Assembly # _____
	Listed as Power Setting #: _____
E.3 Additional information provided by the applicant	
E.3.1 Modulation:	ITU Class(es) of emission: <u> FHSS </u> Can the transmitter operate unmodulated? <input checked="" type="checkbox"/> yes <input checked="" type="checkbox"/> no
E.3.2 Duty Cycle	The transmitter is intended for: <input checked="" type="checkbox"/> Continuous duty <input checked="" type="checkbox"/> Intermittent duty <input checked="" type="checkbox"/> Continuous operation possible for testing purposes
E.3.3 About the UUT	<input checked="" type="checkbox"/> The equipment submitted are representative production models <input checked="" type="checkbox"/> If not, the equipment submitted are pre-production models ? <input checked="" type="checkbox"/> If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested <input checked="" type="checkbox"/> If not, supply full details <input checked="" type="checkbox"/> The equipment submitted is CE marked <input checked="" type="checkbox"/> In addition to the CE mark, the Class-II identifier (Alert Sign) is affixed.
E.3.4 Additional items and/or supporting equipment provided	<input checked="" type="checkbox"/> Spare batteries (e.g. for portable equipment) <input checked="" type="checkbox"/> Battery charging device <input checked="" type="checkbox"/> External Power Supply or AC/DC adapter <input checked="" type="checkbox"/> Test Jig or interface box <input checked="" type="checkbox"/> RF test fixture (for equipment with integrated antennas) <input checked="" type="checkbox"/> Host System Manufacturer: _____ Model #: _____ Model name: _____ <input checked="" type="checkbox"/> Combined equipment Manufacturer: _____ Model #: _____ Model name: _____ <input checked="" type="checkbox"/> User Manual <input checked="" type="checkbox"/> Technical documentation (Handbook and circuit diagrams)

APPENDIX I

PHOTOGRPHS OF TEST SETUP

Radiated Emission Below 1 GHz

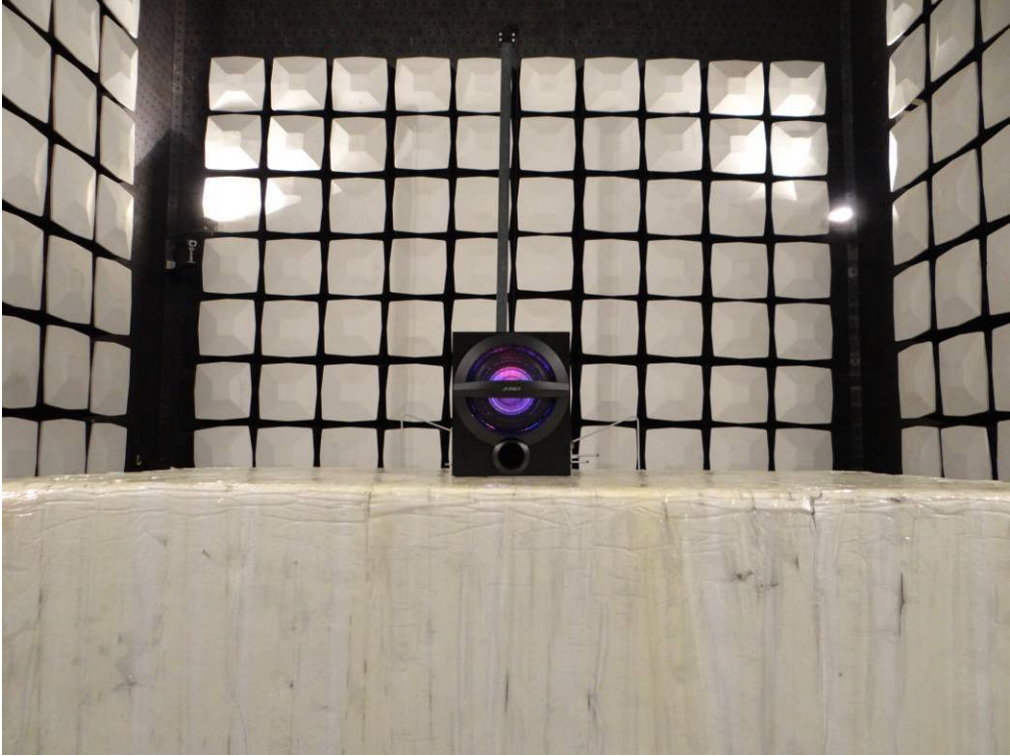

Radiated Emission Above 1 GHz



--- End ---