

**ETSI EN 300328 V1.8.1: 2012 MEASUREMENT AND TEST REPORT**

**For**

**Shenzhen Fenda Technology Co., Ltd.**

**Fenda Hi-Tech Park, Zhoushi Road, Shiyao Town, Baoan District,  
Shenzhen City, Guangdong, China**

**E.U.T.: 2.1 Computer Multimedia Speaker**

**Model Name: F530X, F530BT, F530U, F550X, F550BT, F550BTU, F550U,  
F580X, F580BT, F580U, F580BTU**

**Brand Name: F&D**

**Report Number: NTC1505213E**

**Test Date(s): May 27, 2015 to June 15, 2015**

**Report Date(s): June 15, 2015**

**Prepared by**

**Dongguan Nore Testing Center Co., Ltd.**

**Building D, Gaosheng Science & Technology Park, Zhouxi Longxi  
Road, Nancheng District, Dongguan City, Guangdong Province, China**

**Tel: +86-769-22022444**

**Fax: +86-769-22022799**

**Prepared By**

**Approved & Authorized Signer**

  
\_\_\_\_\_  
**Rose Hu / Engineer**

  
\_\_\_\_\_  
**Iori Fan / Authorized Signatory**

**Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.**



---

# TABLE OF CONTENTS

- 1. GENERAL INFORMATION .....4**
  - PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST ..... 4
- 2. DESCRIPTION OF TEST MODES ..... 6**
- 3. TEST FREQUENCIES ..... 6**
- 4. OBJECTIVE ..... 6**
- 5. TEST METHODOLOGY..... 6**
- 6. TEST FACILITY ..... 6**
- 7. MEASUREMENT UNCERTAINTY ..... 7**
- 8. SUPPORT EQUIPMENT..... 7**
- 9. RF OUTPUT POWER ..... 8**
- 10. DWELL TIME, MINIMUM FREQUENCY OCCUPATION AND ..... 11**
- 11. OCCUPIED CHANNEL BANDWIDTH..... 24**
- 12. HOPPING FREQUENCY SEPARATION..... 29**
- 13. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF BAND DOMAIN ..... 34**
- 14. TRANSMITTER SPURIOUS EMISSIONS ..... 37**
- 15. RECEIVER SPURIOUS EMISSIONS ..... 42**
- 16. TEST EQUIPMENT LIST ..... 46**
- APPENDIX I ..... 47**
- PHOTOGRPHS OF TEST SETUP..... 47**

### Revision History of This Test Report

<b>Report Number</b>	<b>Description</b>	<b>Issued Date</b>
<b>NTC1505213E</b>	<b>Initial Issue</b>	<b>2015-06-15</b>

## 1. GENERAL INFORMATION

### PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST

Manufacturer	: F&D Technology (Shenzhen) Co., Ltd
Address	: Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
Factory Address	: F&D Technology (Shenzhen) Co., Ltd Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
Product Name	: 2.1 Computer Multimedia Speaker
Model Name	: F530X, F530BT, F530U, F550X, F550BT, F550BTU, F550U, F580X, F580BT, F580U, F580BTU
Model Difference Description	: These models have the same circuitry, electrical mechanical, PCB Layout and physical construction. The difference in model number.
Power Supply	: AC 220-240V 50/60Hz 0.4A
Test Voltage	: AC 230V 50Hz AC 207V and AC 253V for Extreme voltage (The voltage range provide by manufacturer)
Operating Temperature Range	: 0°C to +35°C (Declaration by manufacturer)
Bluetooth Version	: 3.0+EDR
Frequency Range	: 2402-2480MHz
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	: FHSS
Number of Channel	: 79
Channel Space	: 1MHz
Antenna Type	: PCB
Antenna Gain	: 0 dBi (Declaration by manufacturer)
Max RF Output Power	: -2.24 dBm (E.I.R.P.)
Adaptive/Non-Adaptive Equipment	: Adaptive equipment
Note	: None

<b>SUMMARY OF TEST RESULTS</b>		
<b>Section (ETSI EN 300328)</b>	<b>Description of Test</b>	<b>TEST RESULT</b>
4.3.1.1	RF Output Power	Compliant
4.3.2.2	Power Spectral Density (Modulations other than FHSS equipment)	N/A
4.3.1.2	Duty cycle, Tx-Sequence, Tx-gap	N/A <sup>see note</sup>
4.3.1.3	Dwell time, Minimum Frequency Occupation & Hopping Sequence (FHSS equipment)	Compliant
4.3.1.4	Hopping Frequency Separation (FHSS equipment)	Compliant
4.3.1.5	Medium Utilisation	N/A <sup>see note</sup>
4.3.1.6	Adaptivity	N/A <sup>see note</sup>
4.3.1.7	Occupied Channel Bandwidth	Compliant
4.3.1.8	Transmitter unwanted emission in the OOB domain	Compliant
4.3.1.9	Transmitter unwanted emissions in the spurious domain	Compliant
4.3.1.10	Receiver spurious emissions	Compliant
4.3.1.11	Receiver Blocking	N/A <sup>see note</sup>

**Note:** These requirements do not apply for equipment with a maximum declared RF Output power of less than 10dBm EIRP or for equipment when operating in a mode where the RF Output power is less than 10dBm EIRP.

## 2. DESCRIPTION OF TEST MODES

The EUT has been tested under Normal Operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed. All data rate and modulation type were tested, only the worst-case record in this report.

## 3. TEST FREQUENCIES

Channel	Frequency MHz
0	2402
39	2441
78	2480

## 4. OBJECTIVE

Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4GHz ISM band and using wide band modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive.

The objective is to determine compliance with ETSI EN 300328 V1.8.1 (2012-06).

## 5. TEST METHODOLOGY

All measurements contained in this report were conducted with ETSI EN 300328 V1.8.1 (2012-06).

## 6. TEST FACILITY

### Site Description

EMC Lab : Listed by FCC, August. 02, 2011  
The Certificate Number is 665078.

Listed by Industry Canada, July 01, 2011  
The Certificate Registration Number. Is 46405-9743

Name of Firm : Dongguan Nore Testing Center Co., Ltd.  
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan  
City, Guangdong Province, China

## 7. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
All emissions, radiated	$\pm 3.70\text{dB}$
Temperature	$\pm 0.8^\circ\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$

## 8. SUPPORT EQUIPMENT

Notebook PC : Manufacturer: IBM Corporation  
M/N: R50e  
S/N: L3-HZNGO  
P/N: 1834KDC

Adapter : Manufacturer: IBM Corporation  
M/N: 08K8210  
Input: AC100-240V 50/60Hz 0.5-1.0A  
Output: DC 16V 4.5A

## 9. RF OUTPUT POWER

### Limits


Frequency Band	Limit
2400 ~ 2483.5 MHz	20 dBm
Adaptive frequency hopping systems	Equivalent isotropic radiated power (e.i.r.p.) ≤20 dBm

### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.2.2.1 for conducted measurement method.
2. The measurements shall be performed at both normal environmental conditions and at The extremes of the operating temperature range.

### Test Configuration

#### Temperature and Voltage Measurement

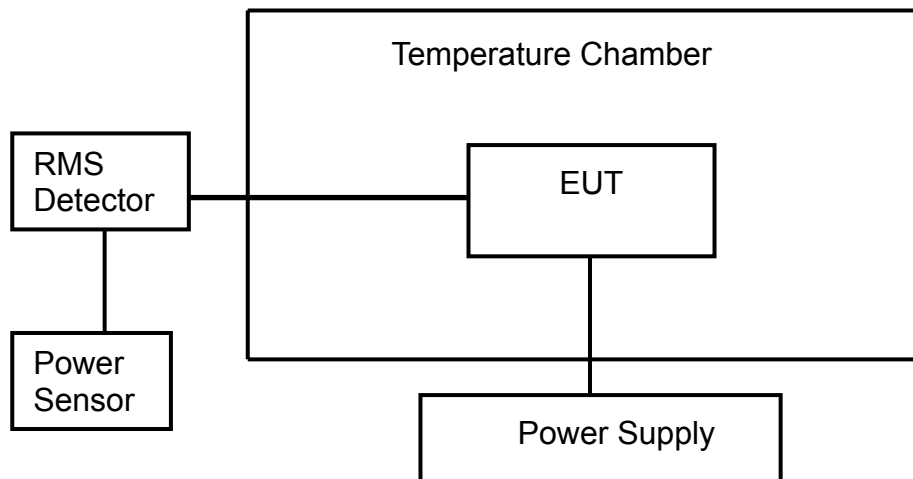

### Test Result

Pass.

Please refer to following data tables.



<b>GFSK</b>					
Humidity :		53 %	Temperature :		24 °C
Test Result:		PASS	Test By:		Sance
Antenna Assembly Gain:				0dBi	
Cable Loss=				1.5dB	
<b>Low Channel f<sub>o</sub> =2402 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-4.55	-3.05	20	
0	AC 207V	-4.65	-3.15	20	
	AC 253V	-4.58	-3.08	20	
35	AC 207V	-4.79	-3.29	20	
	AC 253V	-4.80	-3.30	20	
<b>Middle Channel f<sub>o</sub> =2441 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-4.00	-2.50	20	
0	AC 207V	-4.10	-2.60	20	
	AC 253V	-4.33	-2.83	20	
35	AC 207V	-4.41	-2.91	20	
	AC 253V	-4.52	-3.02	20	
<b>High Channel f<sub>o</sub> =2480 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-4.66	-3.16	20	
0	AC 207V	-4.91	-3.41	20	
	AC 253V	-4.77	-3.27	20	
35	AC 207V	-4.86	-3.36	20	
	AC 253V	-4.72	-3.22	20	

Note: Calculated Power(dBm)=Output Power(dBm)+Cable Loss(dB)+Antenna Gain(dBi)

<b>8DPSK</b>					
Humidity :		53 %	Temperature :		24 °C
Test Result:		PASS	Test By:		Sance
Antenna Assembly Gain:				0dBi	
Cable Loss=				1.5dB	
<b>Low Channel f<sub>o</sub> =2402 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-4.70	-3.20	20	
0	AC 207V	-5.01	-3.51	20	
	AC 253V	-4.89	-3.39	20	
35	AC 207V	-4.78	-3.28	20	
	AC 253V	-4.77	-3.27	20	
<b>Middle Channel f<sub>o</sub> =2441 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-4.60	-3.10	20	
0	AC 207V	-4.65	-3.15	20	
	AC 253V	-4.92	-3.42	20	
35	AC 207V	-4.84	-3.34	20	
	AC 253V	-4.86	-3.36	20	
<b>High Channel f<sub>o</sub> =2480 MHz</b>					
Temperature (°C)	Power Supplied	Reading dBm	EIRP dBm	Limit dBm	
25	AC 230V	-3.74	-2.24	20	
0	AC 207V	-3.78	-2.28	20	
	AC 253V	-3.80	-2.30	20	
35	AC 207V	-3.81	-2.31	20	
	AC 253V	-3.88	-2.38	20	

Note: Calculated Power(dBm)=Output Power(dBm)+Cable Loss(dB)+Antenna Gain(dBi)

## 10. DWELL TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE

### Limits

Condition	Limit
<b>Non-adaptive frequency hopping systems</b>	<p>The accumulated Dwell Time on any hopping frequency shall not be greater than 15 ms within any period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.</p> <p>The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater. The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.</p>
<b>Adaptive frequency hopping systems</b>	<p>Adaptive Frequency Hopping systems shall be capable of operating over a minimum of 70 % of the band.</p> <p>The maximum accumulated dwell time on any hopping frequency shall be 400 ms within any period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.</p> <p>The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.</p> <p>The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.</p>

### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.4.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

### Test Configuration



### Test Result

**Pass.**

Please refer to following data tables and test plots.

Temperature : 24 °C Humidity : 53%  
Test Date : June 11, 2015 Test Result: PASS  
Test By: Sance


Dwell Time									
Mode	Number of Hopping Channel	Number of transmission in a period (channel number *0.4sec)				Length of transmission time (ms)	Dwell Time	Limit (ms)	Result
		Period (Sec)	Sweep time (Sec)	Times in a sweep	Times in a period				
<b>GFSK</b>									
DH1	79	31.6	4	38	300.2	0.489	146.8	400	PASS
DH3	79	31.6	4	20	158.0	1.739	274.8	400	PASS
DH5	79	31.6	4	13	102.7	2.981	306.1	400	PASS
<b>8DPSK</b>									
DH1	79	31.6	4	13	102.7	0.503	51.7	400	PASS
DH3	79	31.6	4	11	86.9	1.747	151.8	400	PASS
DH5	79	31.6	4	11	86.9	2.989	259.7	400	PASS

Minimum Frequency Occupation						
Mode	Number of Hopping Channel	Number of transmission in a period of 4*Dwell time*number of hopping channel	Length of transmission time (ms)	Result (ms)	Minimum Limit (ms)	Result (Pass/Fail)
<b>GFSK</b>						
DH1	79	2	0.489	0.978	0.489	PASS
DH3	79	5	1.739	8.695	1.739	PASS
DH5	79	3	2.981	8.943	2.981	PASS
<b>8DPSK</b>						
DH1	79	1	0.503	0.503	0.503	PASS
DH3	79	2	1.747	3.494	1.747	PASS
DH5	79	3	2.989	8.967	2.989	PASS


Temperature : 24 °C Humidity : 53%  
 Test Date : June 11, 2015 Test Result: PASS  
 Test By: Sance

Hopping Sequence						
Hopping Channels	Hopping Channels Limits	F <sub>l</sub> 20dB (MHz)	F <sub>h</sub> 20dB (MHz)	Min. Hopping Range (%)	Min. Hopping Range Limit(%)	Result
<b>GFSK</b>						
79	15	2401.338	2480.824	95.20%	70.00%	PASS
<b>8DPSK</b>						
79	15	2401.204	2480.824	95.40%	70.00%	PASS


### GFSK DH1

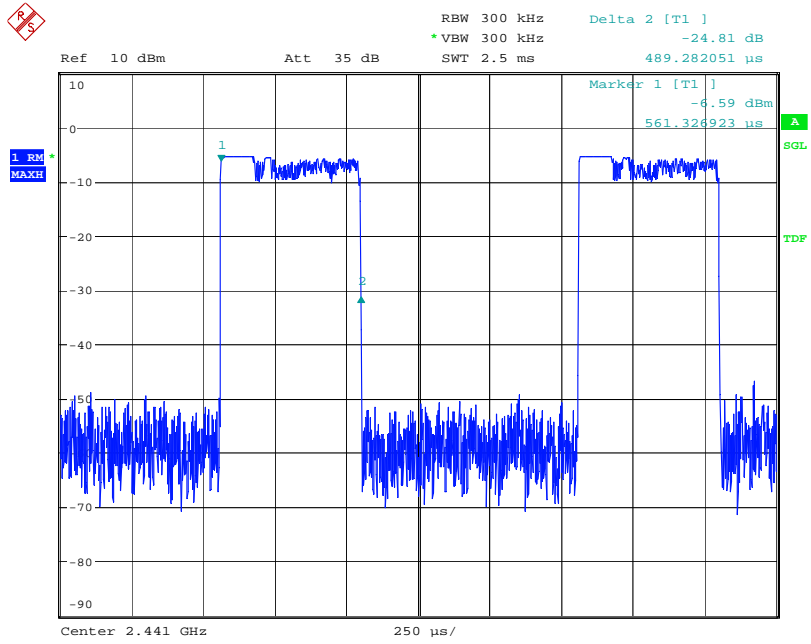

Date: 11.JUN.2015 12:24:45

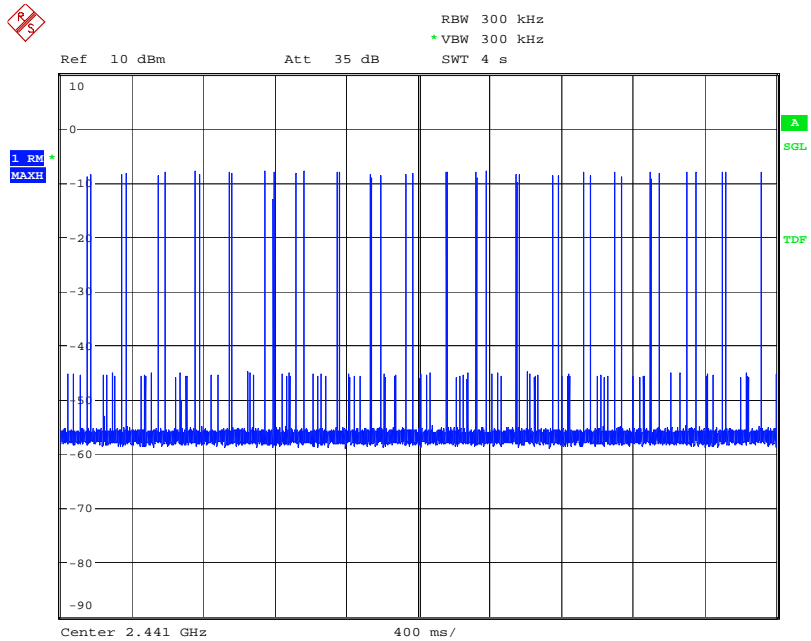


Date: 11.JUN.2015 12:31:53

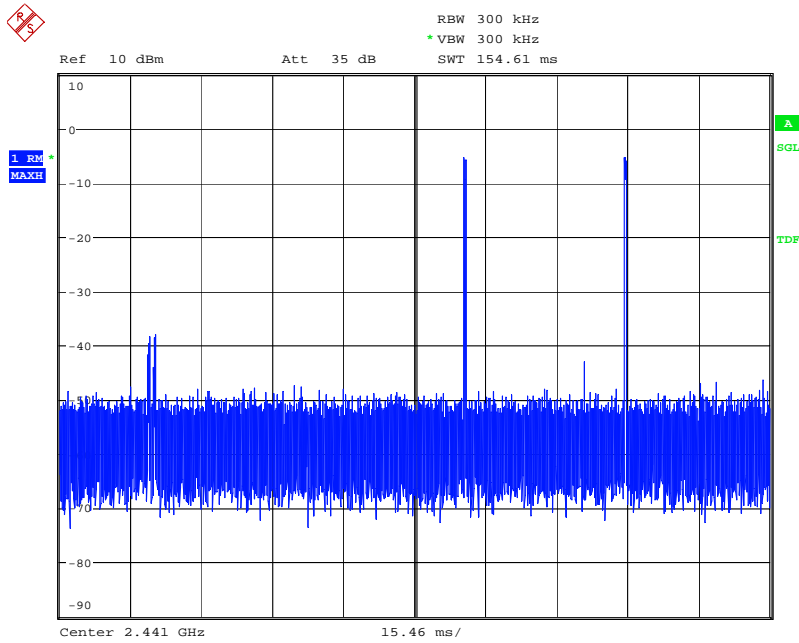


Date: 11.JUN.2015 12:36:36


### GFSK DH3

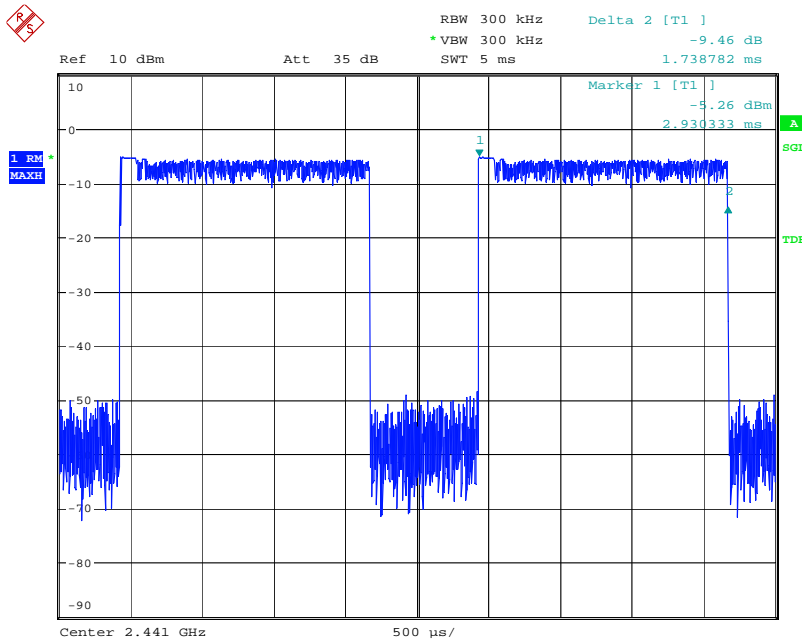

Date: 11.JUN.2015 12:23:42

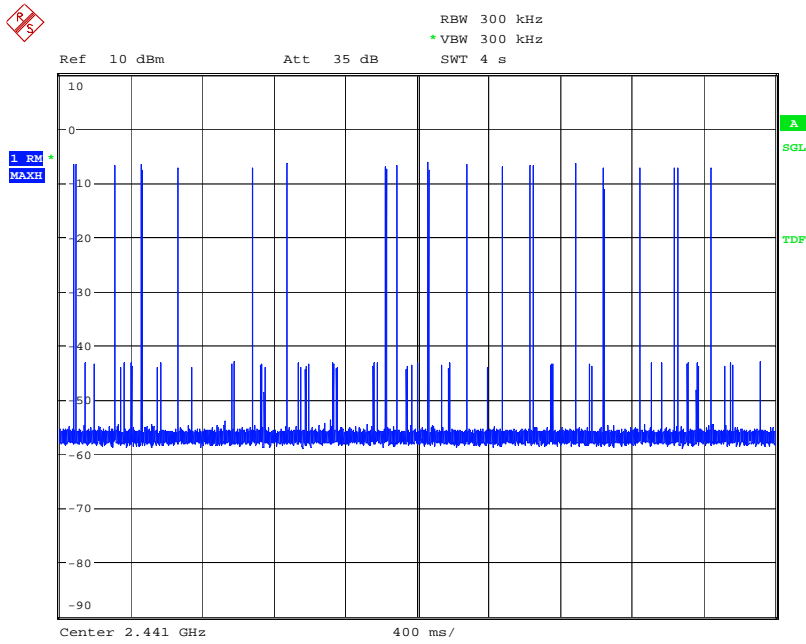


Date: 11.JUN.2015 12:32:25

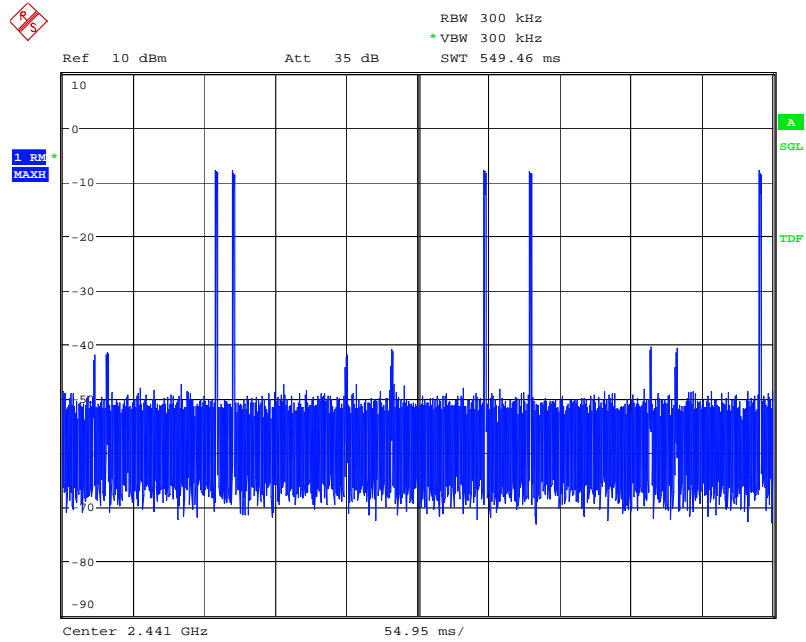


Date: 11.JUN.2015 12:38:06




### GFSK DH5

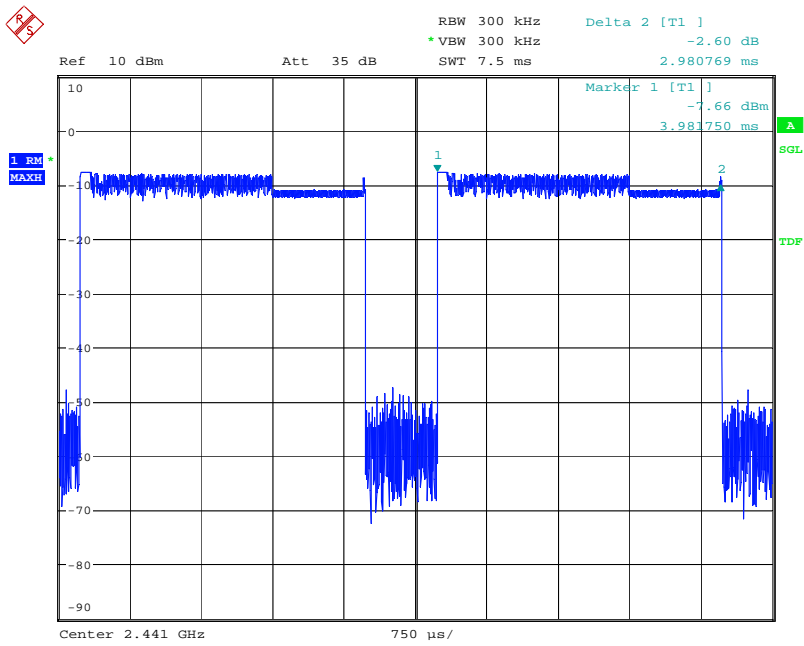

Date: 11.JUN.2015 12:22:46

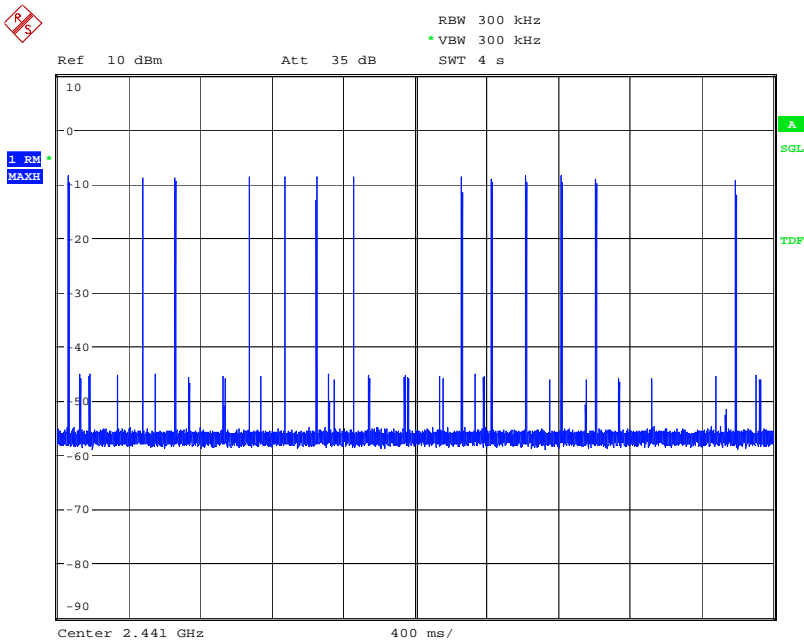


Date: 11.JUN.2015 12:32:57

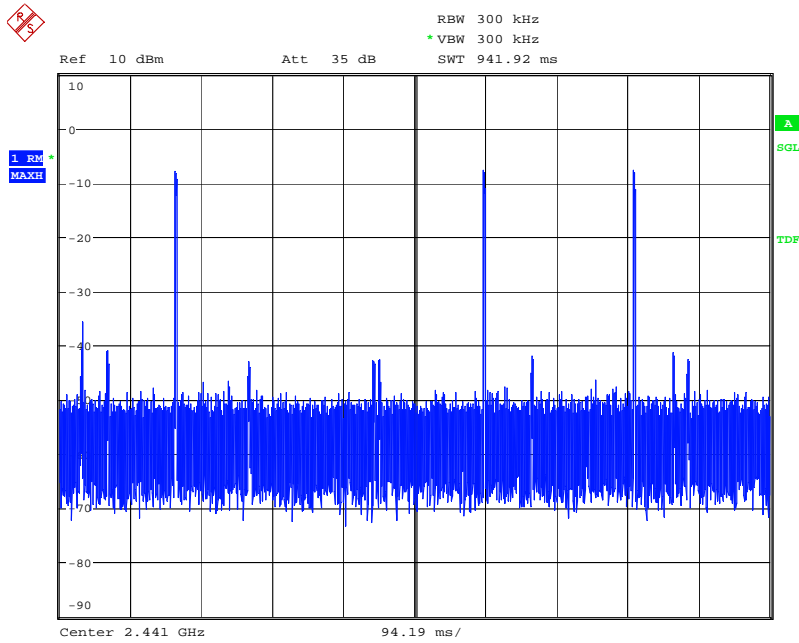


Date: 11.JUN.2015 12:39:11


### 8DPSK 3-DH1

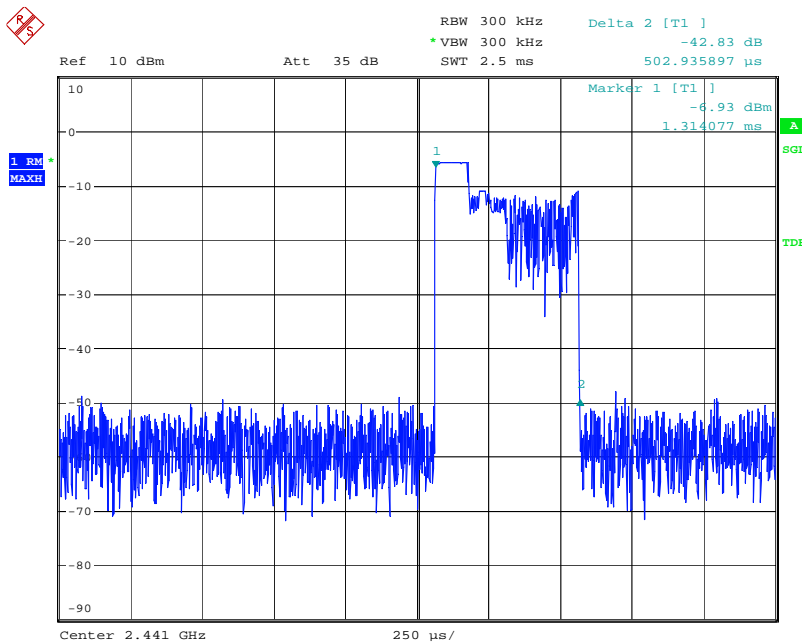

Date: 11.JUN.2015 12:26:05

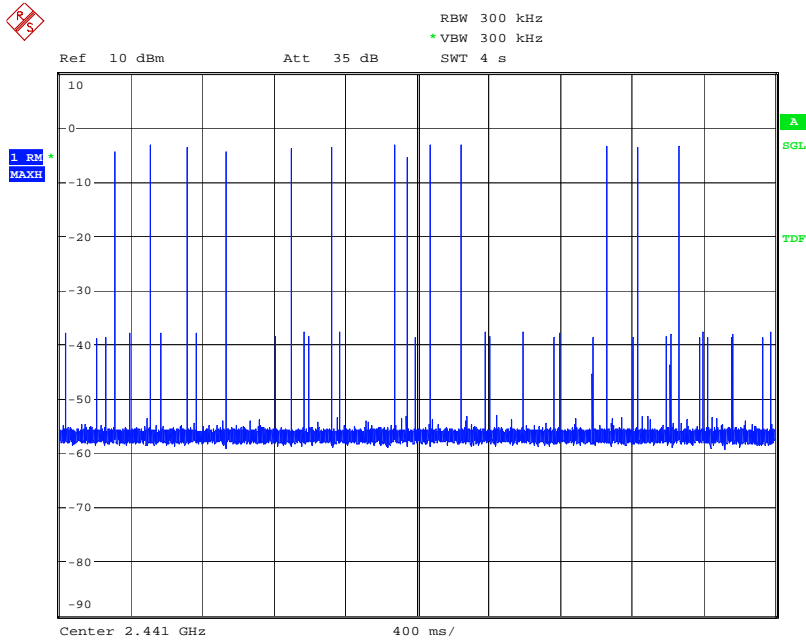


Date: 11.JUN.2015 12:33:53

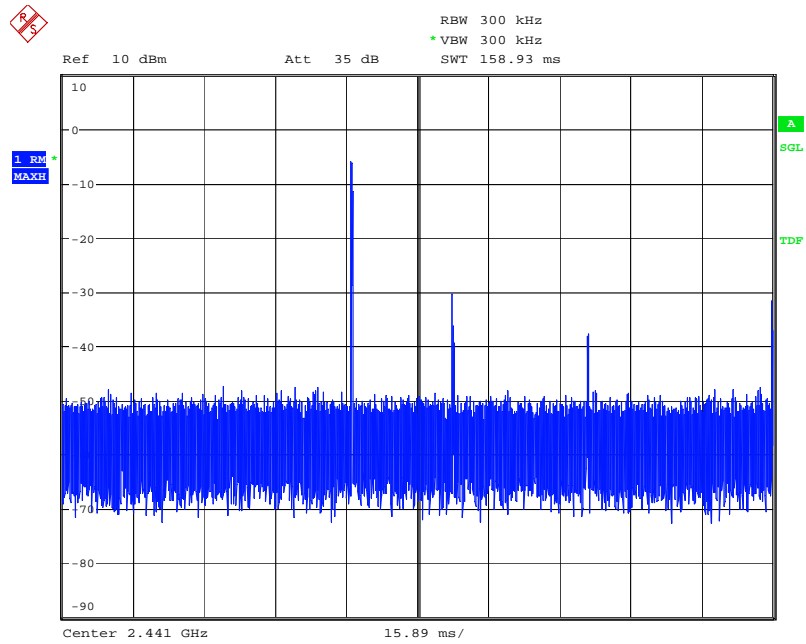


Date: 11.JUN.2015 12:40:45


### 8DPSK 3-DH3

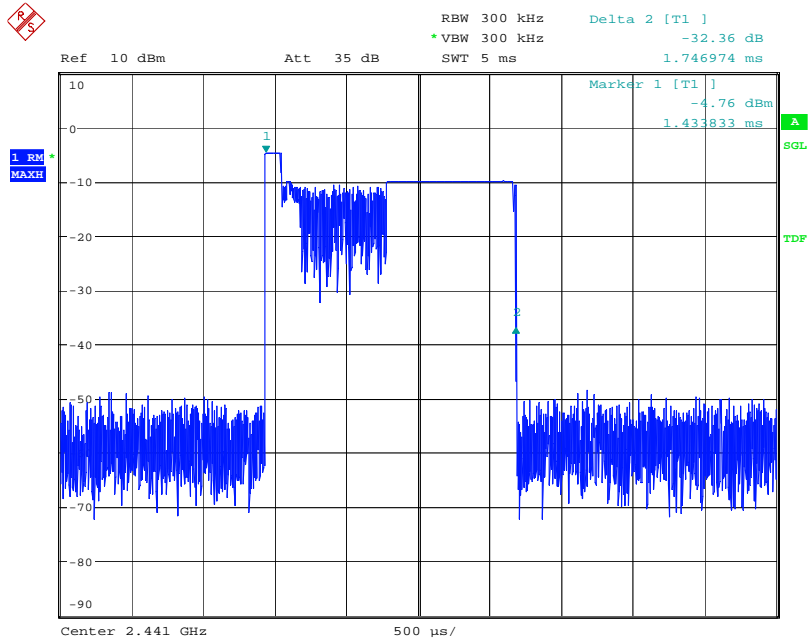

Date: 11.JUN.2015 12:28:53

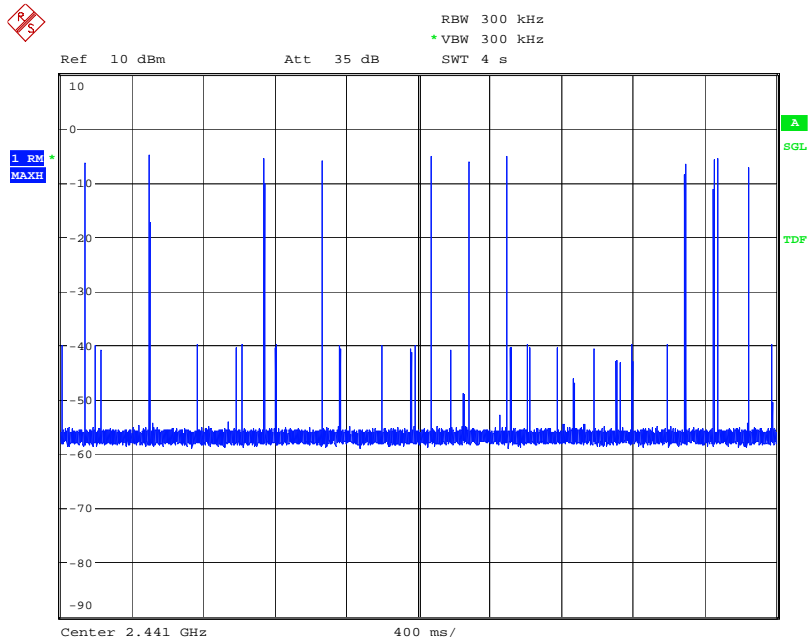


Date: 11.JUN.2015 12:34:21

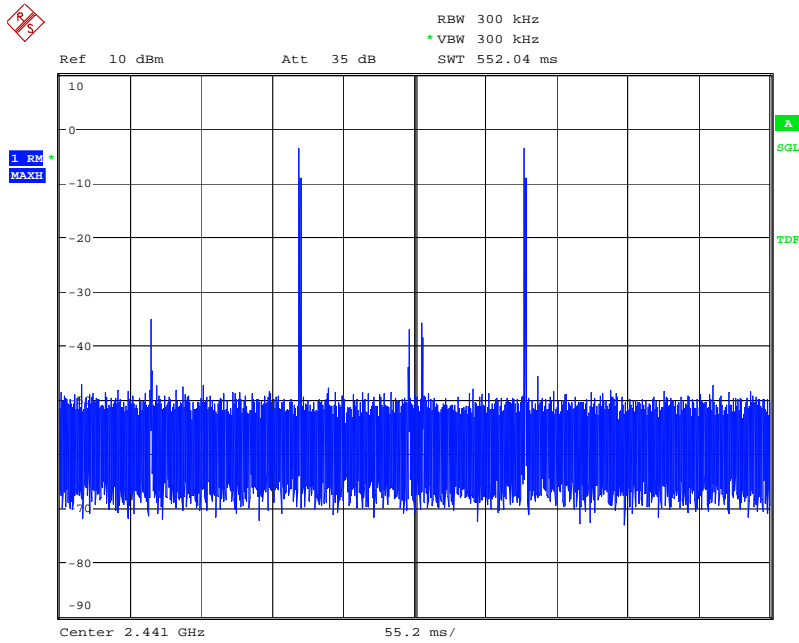


Date: 11.JUN.2015 12:42:07


### 8DPSK 3-DH5

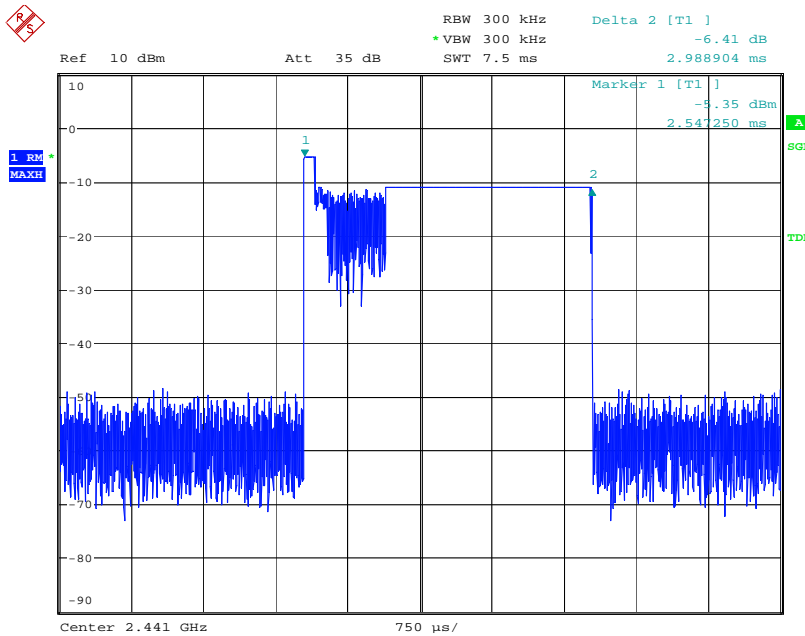

Date: 11.JUN.2015 12:29:52

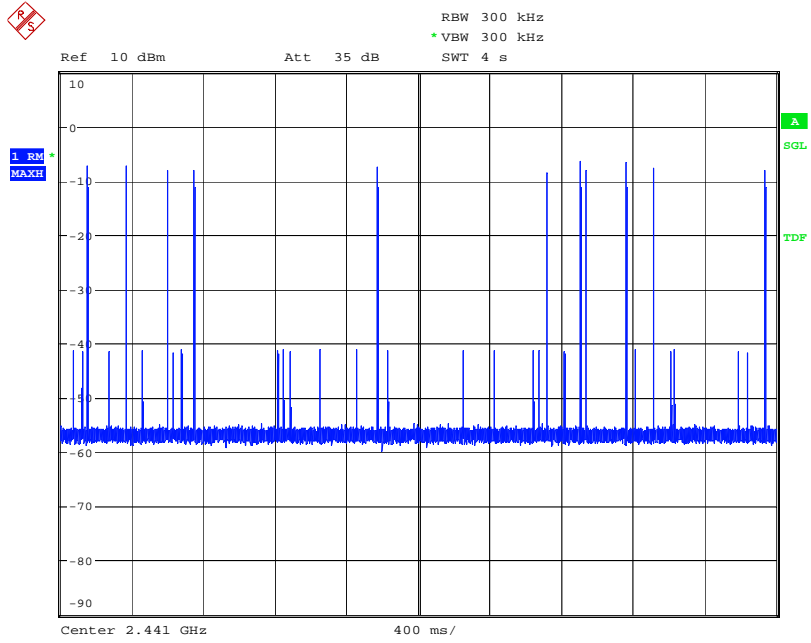


Date: 11.JUN.2015 12:35:09

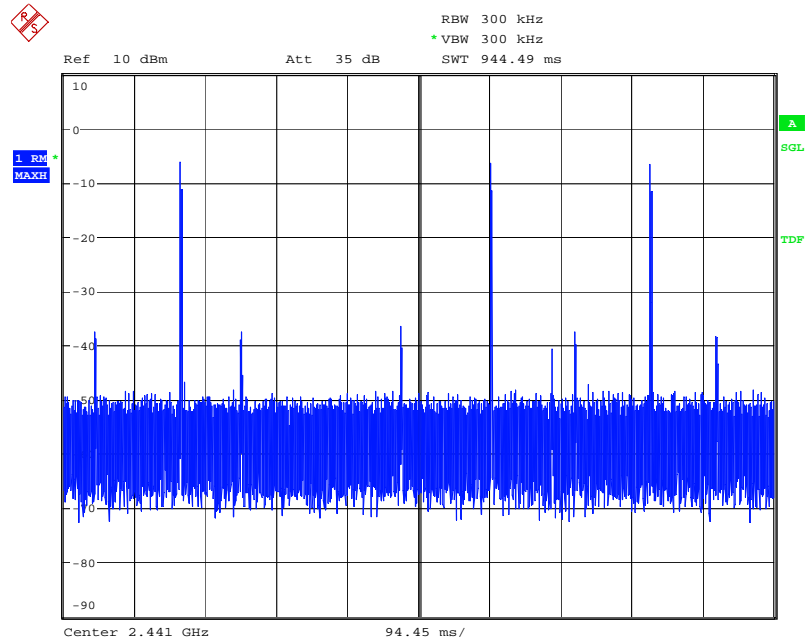


Date: 11.JUN.2015 12:39:23

## Hopping Sequence GFSK

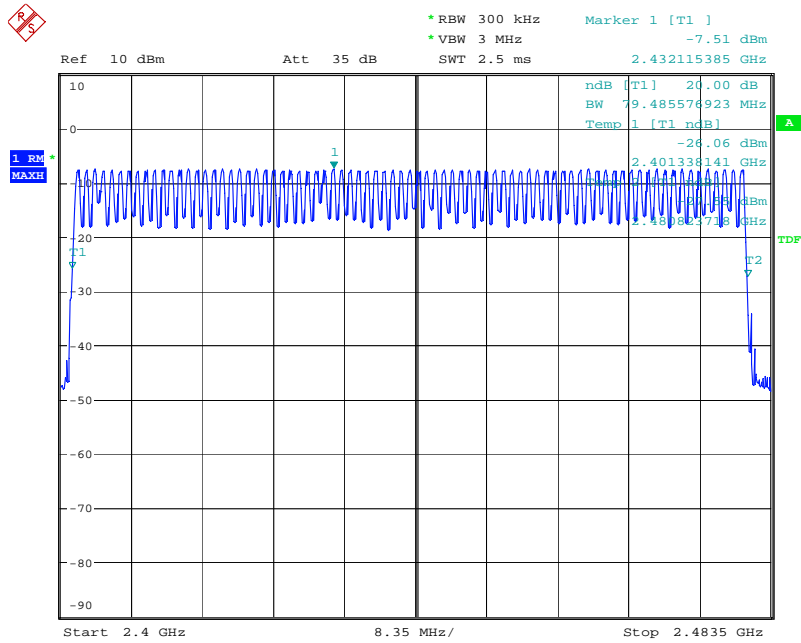

Date: 11.JUN.2015 13:19:10

## 8DPSK

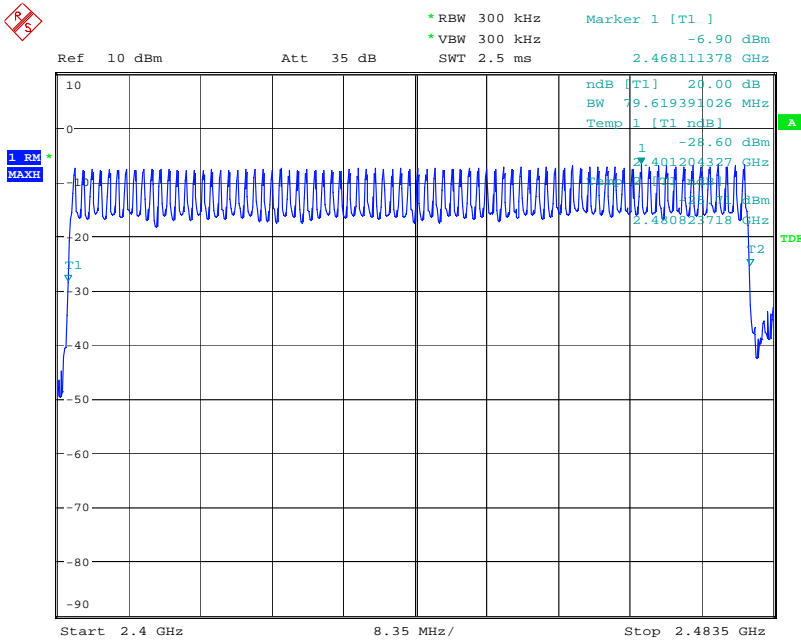

Date: 11.JUN.2015 14:06:45

## 11. OCCUPIED CHANNEL BANDWIDTH

### Limits

Condition	Limit
All types of equipment	Shall fall completely within the band 2400 to 2483.5 MHz
For non-adaptive using wide band modulations other than FHSS system and e.i.r.p > 10dBm	Less than 20MHz
For non-adaptive Frequency Hopping system and e.i.r.p > 10dBm	Less than 5MHz

### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.8.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

### Test Configuration



### Test Result

**Pass.**

Please refer to following data tables and test plots.




Temperature : 24 °C Humidity : 53%  
 Test Date : June 11, 2015 Test Result: PASS  
 Test By: Sance

Channel frequency (MHz)	99% Bandwidth (KHz)	FL at 99% BW (KHz)	FH at 99% BW (KHz)	Limit	Result
<b>GFSK</b>					
2402	866	2401.514	2402.481	FL > 2.4 GHz and FH < 2.4835 GHz	Pass
2441	1053	---	---		Pass
2480	966	2479.514	2480.481		Pass
<b>8DPSK</b>					
2402	1106	2401.447	2402.553	FL > 2.4 GHz and FH < 2.4835 GHz	Pass
2441	1101	---	---		Pass
2480	1111	2479.447	2480.558		Pass


Note: FL is the lowest frequency of the 99% occupied bandwidth of power envelope.  
 FH is the highest frequency of the 99% occupied bandwidth of power envelope.

### GFSK Lowest Channel

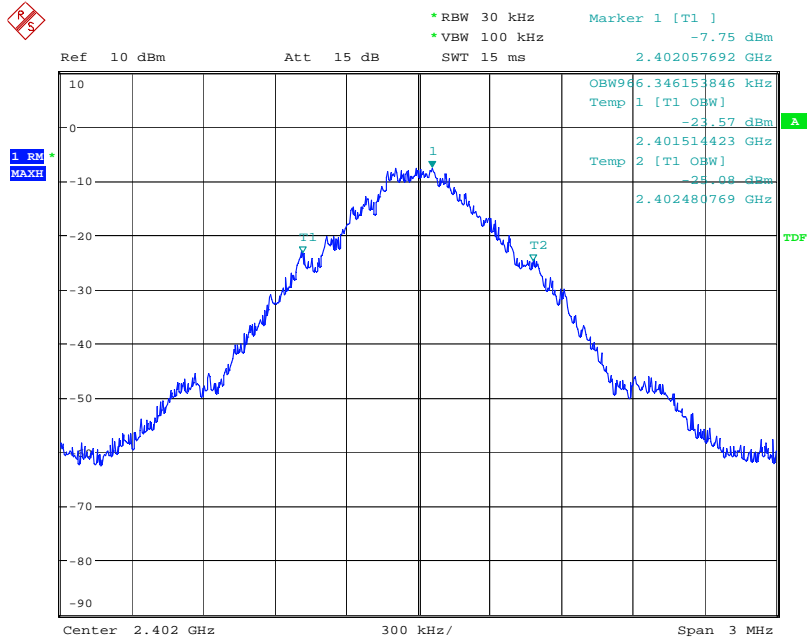


Date: 11.JUN.2015 10:18:41

### GFSK Middle Channel

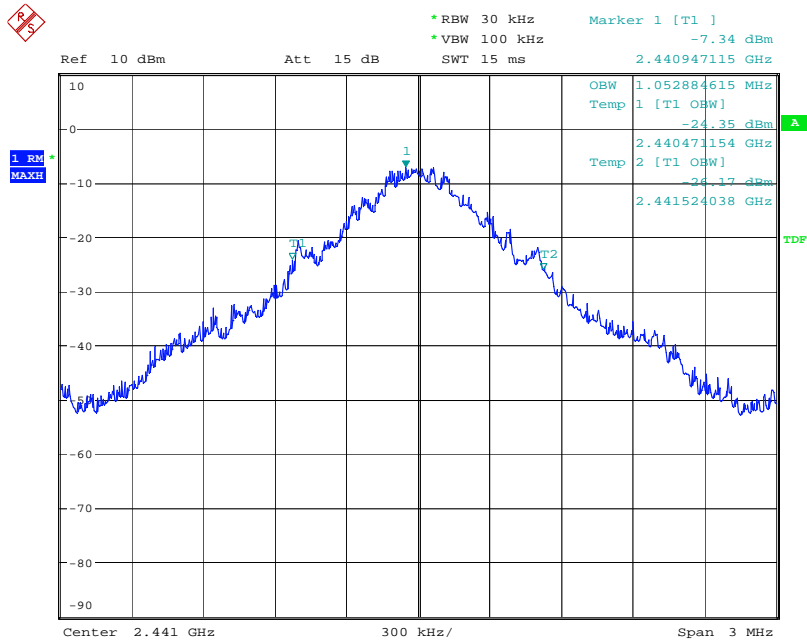


Date: 11.JUN.2015 10:17:06

### GFSK Highest Channel

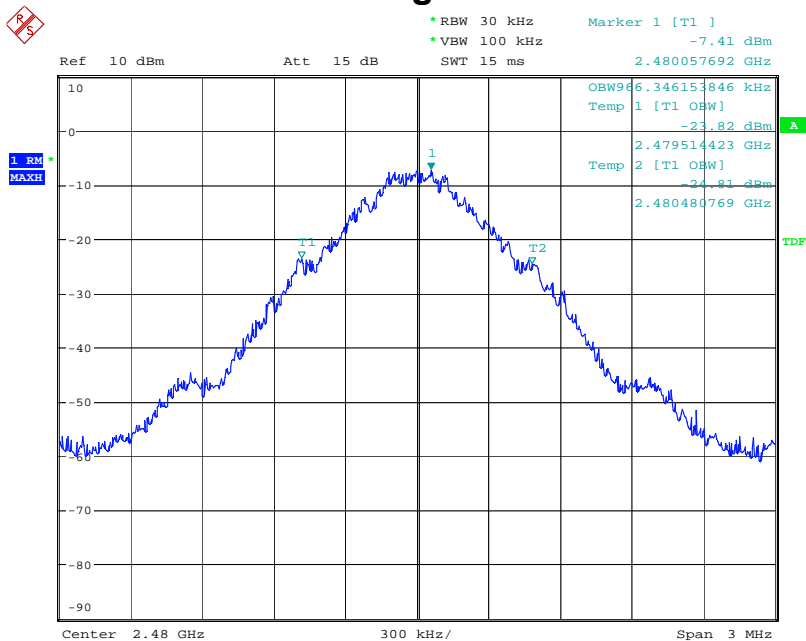


Date: 11.JUN.2015 10:16:34

### 8DPSK Lowest Channel

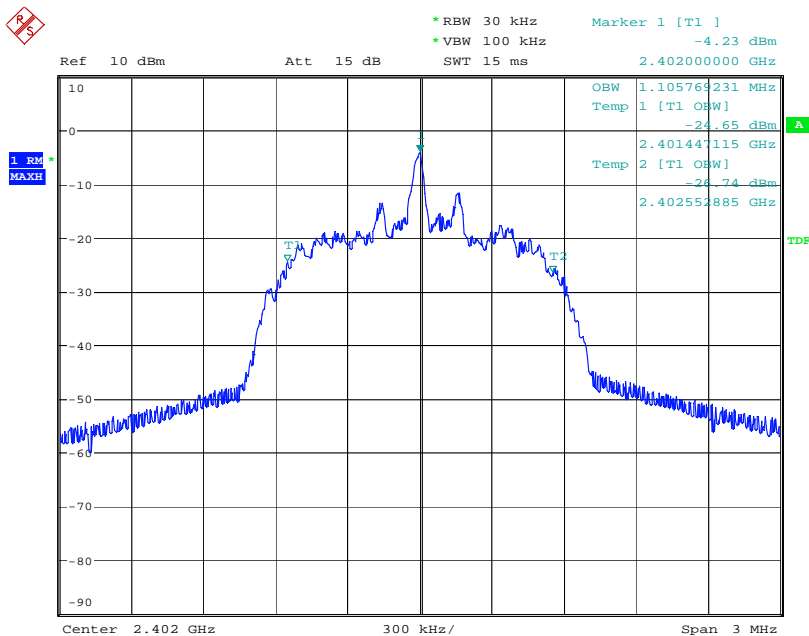


Date: 11.JUN.2015 10:12:17

### 8DPSK Middle Channel

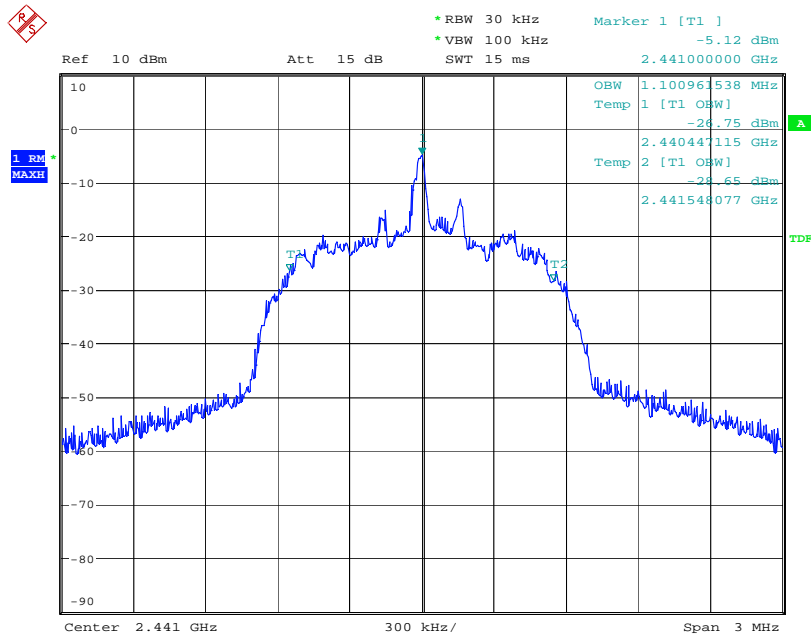

Date: 11.JUN.2015 10:13:44

### 8DPSK Highest Channel

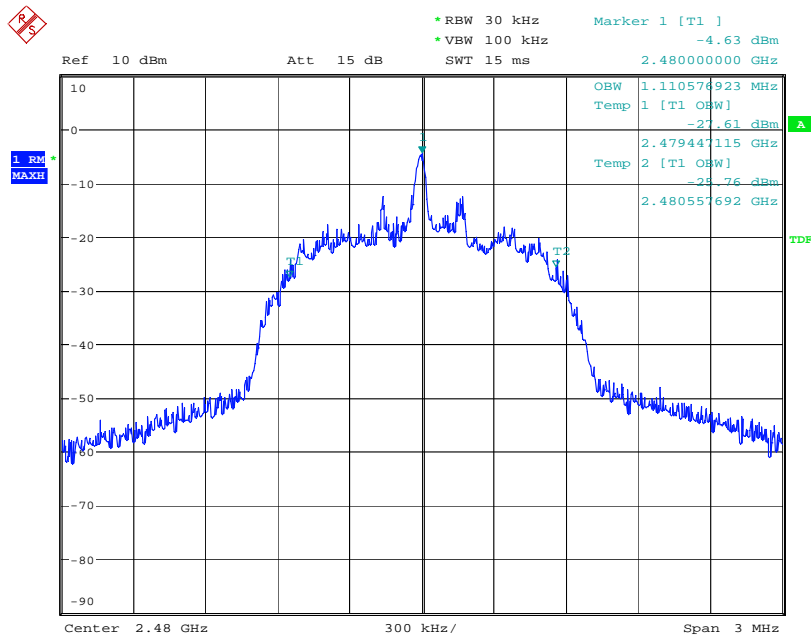

Date: 11.JUN.2015 10:14:41

## 12. HOPPING FREQUENCY SEPARATION

### Limits

Condition	Limit
Nom-adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth of a single hop, with a minimum separation of 100 kHz.
Adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be 100 kHz.

### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.5.2.1 for conducted measurement method.
2. The measurements shall be performed at normal environmental condition.

### Test Configuration



### Test Result

**Pass.**


Please refer to following data tables and test plots.

Temperature : 24 °C  
Test Date : June 11, 2015  
Test By: Sance

Humidity : 53%  
Test Result: PASS


Channel frequency (MHz)	Channel Separation (KHz)	Limit (MHz) Minimum	Result
<b>GFSK</b>			
2402	1019	0.1	Pass
2441	1005	0.1	Pass
2480	1048	0.1	Pass
<b>8DPSK</b>			
2402	1000	0.1	Pass
2441	1005	0.1	Pass
2480	1000	0.1	Pass

### GFSK Lowest Channel

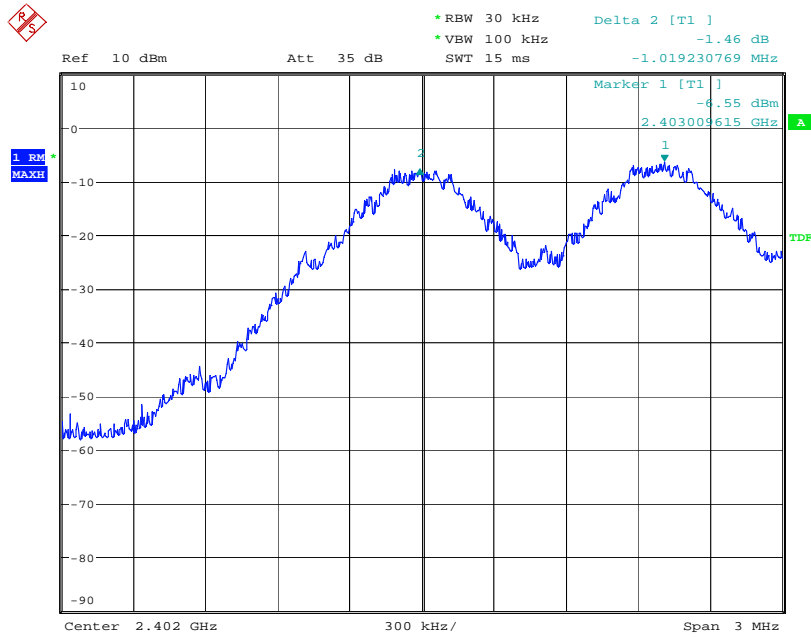


Date: 11.JUN.2015 10:50:45

### GFSK Middle Channel

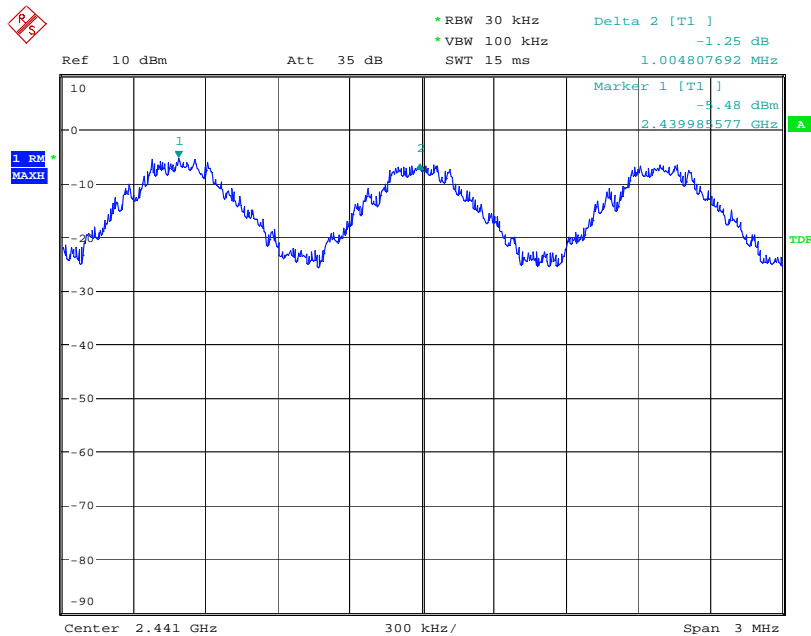


Date: 11.JUN.2015 10:53:27

### GFSK Highest Channel

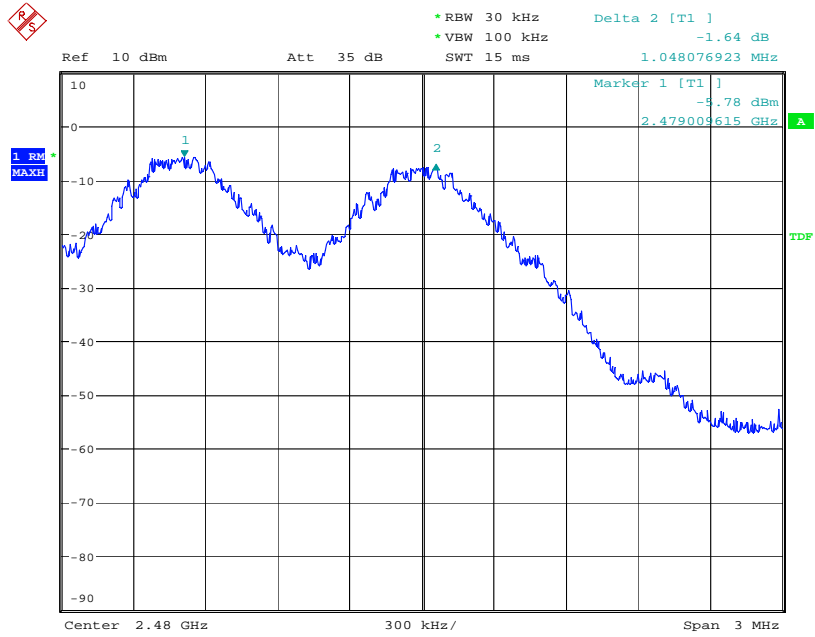

Date: 11.JUN.2015 10:55:44


### 8DPSK Lowest Channel

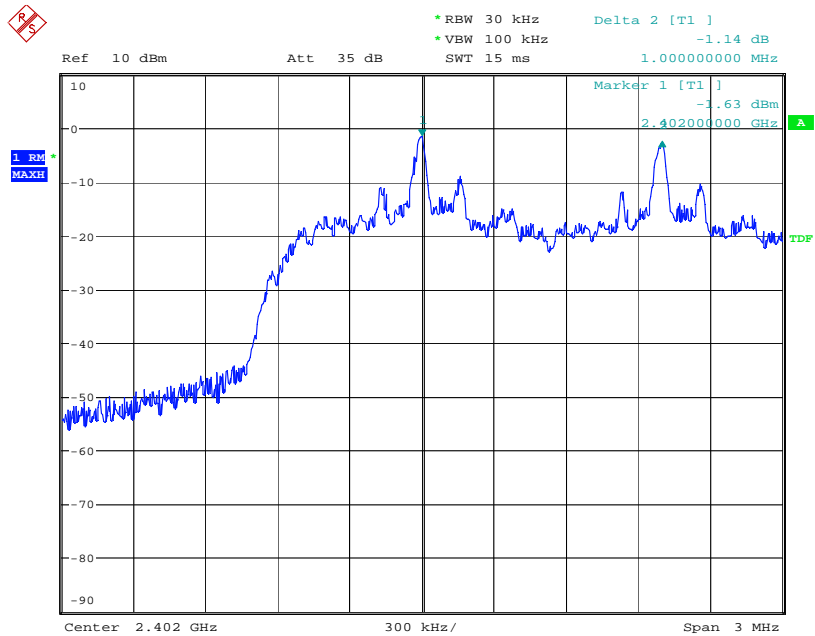

Date: 11.JUN.2015 10:58:09




### 8DPSK Middle Channel

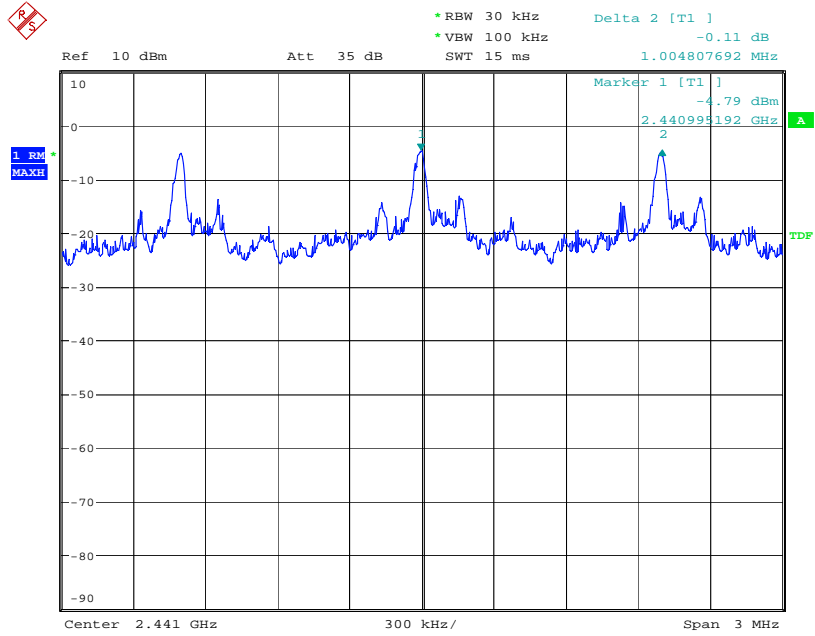

Date: 11.JUN.2015 11:00:38

### 8DPSK Highest Channel

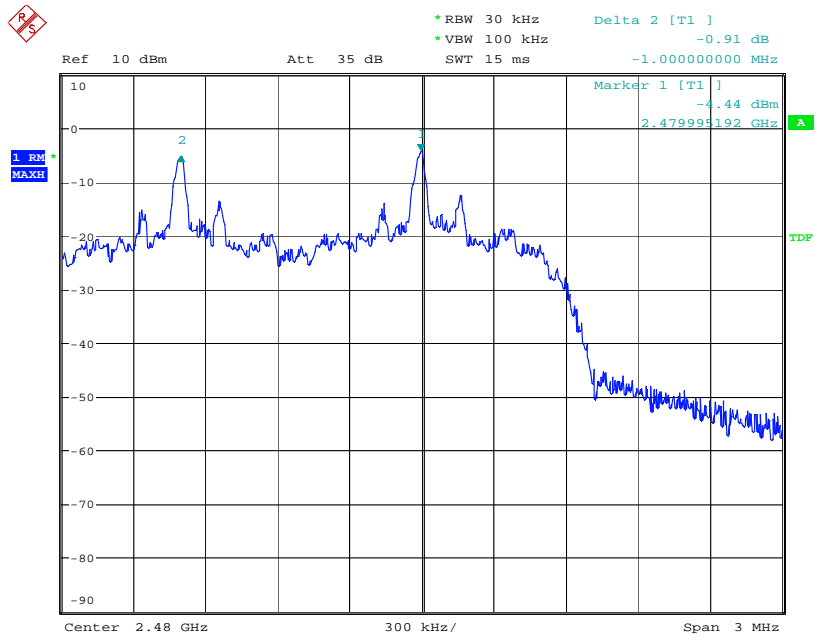


Date: 11.JUN.2015 11:02:06

### 13. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

#### Limits

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask

Transmit mask

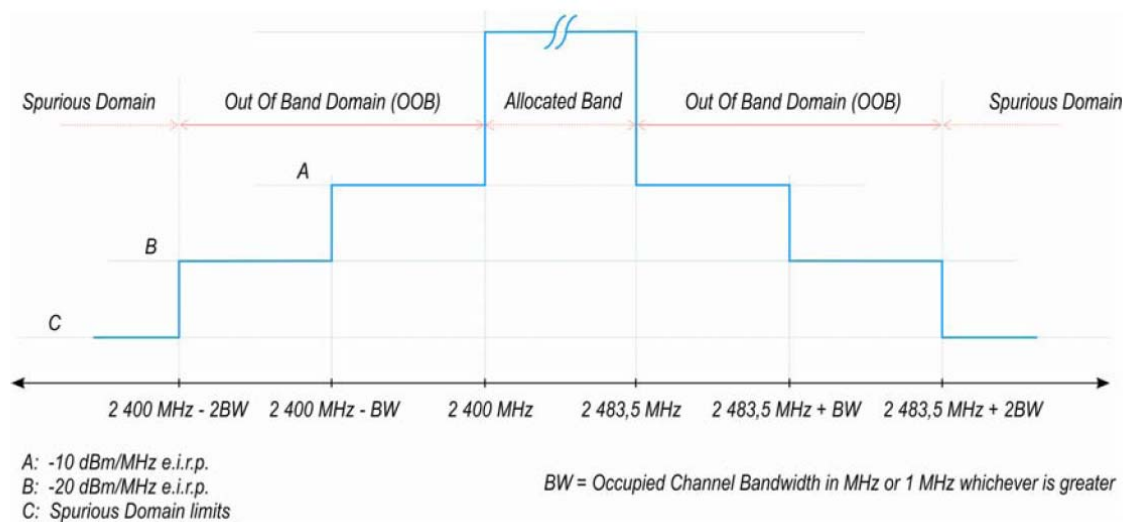


#### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.9.2.1 for conducted measurement method.
2. The measurements shall be performed at both normal environmental conditions and at The extremes of the operating temperature range.

#### Test Configuration

##### Temperature and Voltage Measurement

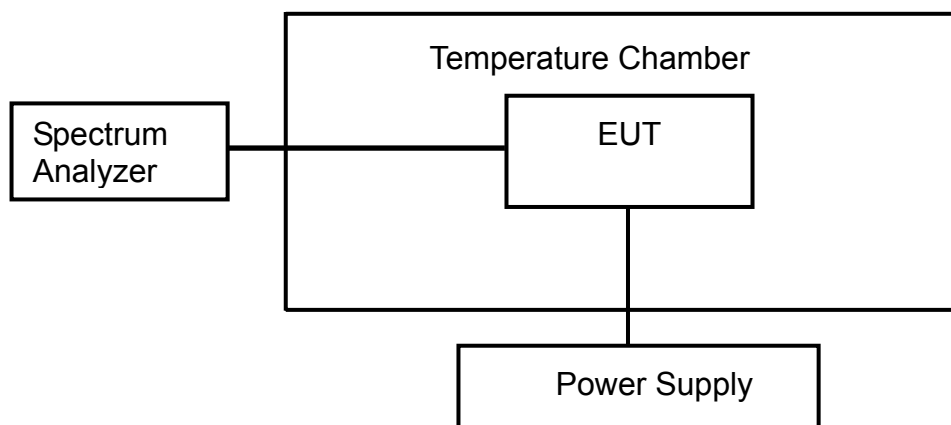

## Test Result

**Pass.**

Please refer to following data tables.

Temperature : 24 °C  
Test Date : June 11, 2015  
Test By: Sance

Humidity : 53%  
Test Result: PASS

Condition		2400-BW~2400 / 2483.5+BW ~2483.5 (dBm/MHz)	Limit (dBm/MHz)	2400-2*BW~2400-BW / 2483.5+2*BW ~2483.5+BW (dBm/MHz)	Limit (dBm/MHz)	Result
<b>GFSK (2402MHz)</b>						
25	AC 230V	-31.56	-10	-45.24	-20	PASS
0	AC 207V	-31.10	-10	-45.01	-20	PASS
	AC 253V	-31.56	-10	-45.51	-20	PASS
35	AC 207V	-31.47	-10	-45.40	-20	PASS
	AC 253V	-31.00	-10	-45.48	-20	PASS
<b>GFSK (2480MHz)</b>						
25	AC 230V	-44.40	-10	-45.14	-20	PASS
0	AC 207V	-44.17	-10	-45.89	-20	PASS
	AC 253V	-44.22	-10	-45.90	-20	PASS
35	AC 207V	-44.46	-10	-45.62	-20	PASS
	AC 253V	-44.05	-10	-45.63	-20	PASS
<b>8DPSK (2402MHz)</b>						
25	AC 230V	-34.58	-10	-46.79	-20	PASS
0	AC 207V	-34.57	-10	-46.6	-20	PASS
	AC 253V	-34.16	-10	-46.55	-20	PASS
35	AC 207V	-34.33	-10	-46.85	-20	PASS
	AC 253V	-34.66	-10	-46.62	-20	PASS
<b>8DPSK (2480MHz)</b>						
25	AC 230V	-45.00	-10	-45.13	-20	PASS
0	AC 207V	-45.15	-10	-45.42	-20	PASS
	AC 253V	-45.37	-10	-45.00	-20	PASS
35	AC 207V	-45.40	-10	-45.51	-20	PASS
	AC 253V	-45.48	-10	-45.46	-20	PASS

## 14. TRANSMITTER SPURIOUS EMISSIONS

### Limits:

The transmitter unwanted emissions in the spurious domain shall not exceed the values.


Frequency Range	Maximum power e.r.p. ( $\leq 1$ GHz) e.i.r.p. ( $> 1$ GHz)	Bandwidth
30 MHz to 47MHz	-36 dBm	100KHz
47 MHz to 74MHz	-54 dBm	100KHz
74 MHz to 87.5MHz	-36 dBm	100KHz
87.5 MHz to 118MHz	-54 dBm	100KHz
118 MHz to 174MHz	-36 dBm	100KHz
174 MHz to 230MHz	-54 dBm	100KHz
230 MHz to 470MHz	-36 dBm	100KHz
470 MHz to 862MHz	-54 dBm	100KHz
862 MHz to 1GHz	-36 dBm	100KHz
1GHz to 12.75GHz	-30 dBm	1MHz

### Test Method


1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.10.2.2 for radiated measurement method.
2. The measurements shall be performed at normal environmental condition.

## Test Configuration

### Below 1GHz

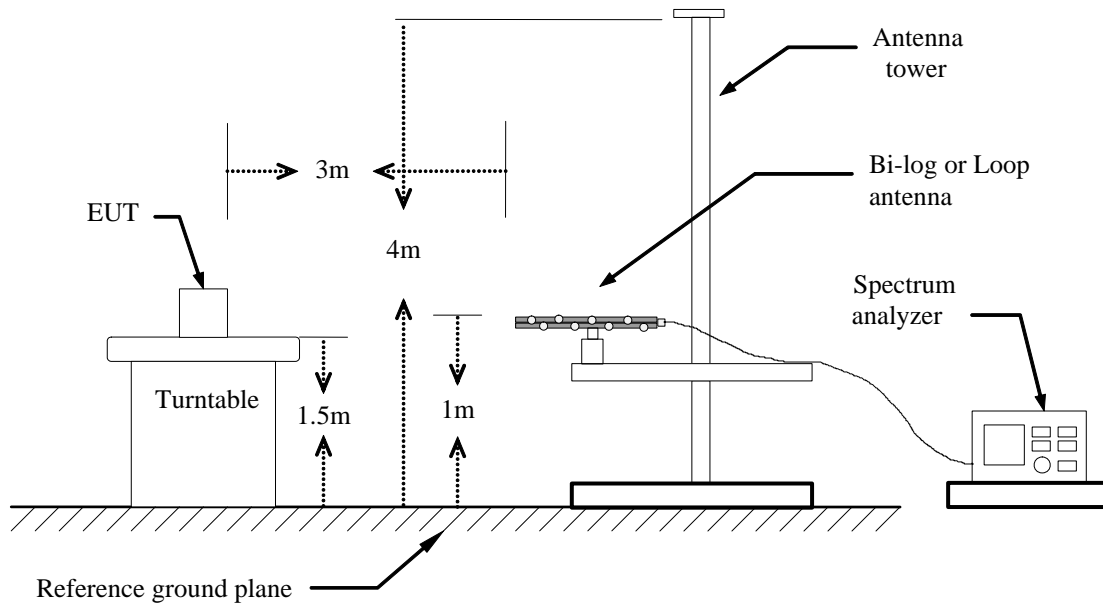

### Above 1GHz

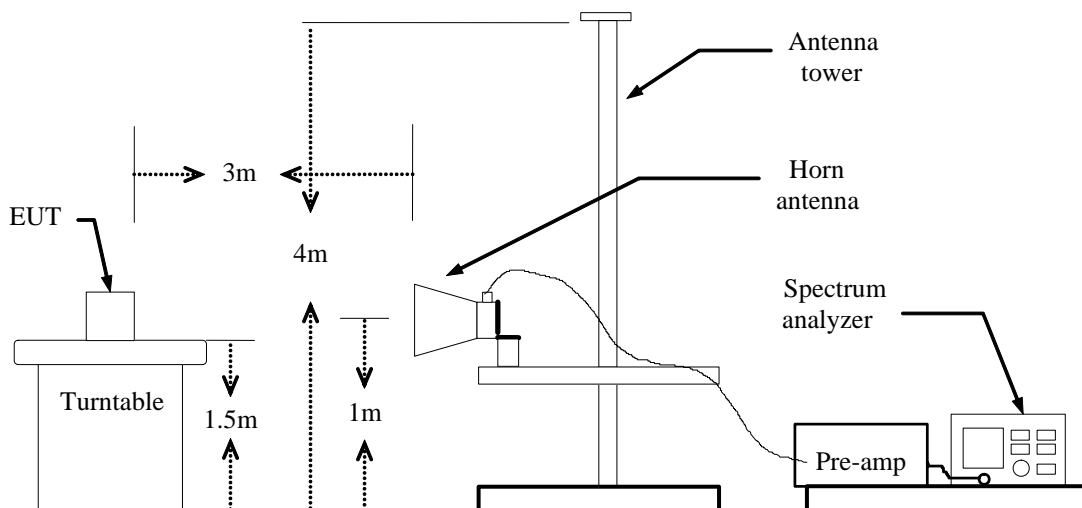

## Test Result

Pass.

Please refer to following data tables (The worst case GFSK).

Below 1GHz Low Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
48.4299	Vertical	-68.05	-54.00	-14.05
92.0798	Vertical	-65.09	-54.00	-11.09
---				
91.1098	Horizontal	-72.02	-54.00	-18.02
188.1100	Horizontal	-73.31	-54.00	-19.31
---				

- Note:**
1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)
  2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  3. The other spurious emissions are not found in stand-by mode.

Below 1GHz High Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
49.3998	Vertical	-81.46	-54.00	-27.46
188.1100	Vertical	-72.94	-54.00	-18.94
---				
48.4299	Horizontal	-67.41	-54.00	-13.41
184.2298	Horizontal	-68.63	-54.00	-14.63
---				

- Note:**
1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)
  2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  3. The other spurious emissions are not found in stand-by mode.



Above 1GHz Low Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4804	Vertical	-35.21	-30	-5.21
---				
---				
4804	Horizontal	-33.49	-30	-3.49
---				
Above 1GHz High Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: TX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4960	Vertical	-38.65	-30	-8.65
---				
---				
4960	Horizontal	-34.57	-30	-4.57
---				
---				

- Note:**
1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)
  2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  3. The other spurious emissions are not found in stand-by mode.

## 15. RECEIVER SPURIOUS EMISSIONS

### Limits

Frequency Range	Maximum power e.r.p. ( $\leq 1$ GHz) e.i.r.p. ( $> 1$ GHz)	Bandwidth
30 MHz to 1GHz	-57 dBm	100KHz
1GHz to 12.75GHz	-47 dBm	1MHz

### Test Method

1. Please refer to ETSI EN 300328 (V<sub>1.8.1</sub>) clause 5.3.11.2.2 for radiated measurement method.
2. The measurements shall be performed at normal environmental condition.

### Test Configuration

(Same as section 14 in this test report)

### Test Result

**Pass.**

Please refer to following data tables (the worst case GFSK).

Below 1GHz Low Channel				
Humidity : 53%		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
68.7997	Vertical	-66.65	-57.00	-9.65
90.1400	Vertical	-61.05	-57.00	-4.05
121.1800	Vertical	-65.93	-57.00	-8.93
---				
92.0798	Horizontal	-69.96	-57.00	-12.96
115.3598	Horizontal	-67.90	-57.00	-10.90
194.9000	Horizontal	-70.44	-57.00	-13.44
---				

- Note:** 1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)  
 2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Below 1GHz High Channel				
Humidity : 53%		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
73.6500	Vertical	-70.199	-57.00	-13.19
120.2099	Vertical	-67.08	-57.00	-10.08
184.2298	Vertical	-69.38	-57.00	-12.38
195.8700	Vertical	-69.18	-57.00	-12.18
---				
47.4600	Horizontal	-64.68	-57.00	-7.68
70.7399	Horizontal	-65.41	-57.00	-8.41
111.34800	Horizontal	-63.77	-57.00	-6.77
---				

**Note:** 1. Emission Level (dBm) = Reading level (dBm)+Correction Factor (dB)  
 2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Above 1GHz Low Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4804	Vertical	-54.10	-47	-7.10
---				
---				
---				
4804	Horizontal	-51.22	-47	-4.22
---				
---				
---				

Above 1GHz High Channel				
Humidity : 53 %		Temperature : 24 °C		
Test Result: PASS		Test By: Sance		
Test Mode: RX				
Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Margin (dB)
4960	Vertical	-53.20	-47	-6.20
---				
---				
---				
4960	Horizontal	-51.23	-47	-4.23
---				
---				
---				

NOTE: 1. Remark"---" means that the other spurious emissions are not found.  
 2. Emission Level (dBm) = Reading level (dBm) + Correction Factor (dB)


## 16. TEST EQUIPMENT LIST

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Receiver	Rohde & Schwarz	ESCI7	100837	Nov.25, 2014	Nov.24, 2015
DC Power Source	HUA YI	HY5003-2	N/A	Nov.05, 2014	Nov.04, 2015
Temperature & Humidity Chamber	HAIDA	DH-225T	N/A	Nov.07, 2014	Nov.06, 2015
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Sep.02, 2014	Sep.01, 2015
Horn Antenna	COM-Power	AH-118	071078	Nov. 07, 2014	Nov. 06, 2015
Pre-Amplifier	COM-Power	PAM-118	443007	Nov. 05, 2014	Nov. 04, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct.24, 2014	Oct.23, 2015
Broadband Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2014	Nov. 27, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	Nov.05, 2014	Nov.04, 2015
Pre-Amplifier	HP	HP 8447D	1140A00203	Nov.09, 2014	Nov.08, 2015
Power Meter	Anritsu	ML2495A	1139001	Nov.05, 2014	Nov.04, 2015
Cable	Huber+Suhner	CIL02	N/A	Nov.09, 2014	Nov.08, 2015

## **APPENDIX I**

### **PHOTOGRPHS OF TEST SETUP**

**Radiated Emission Below 1 GHz**

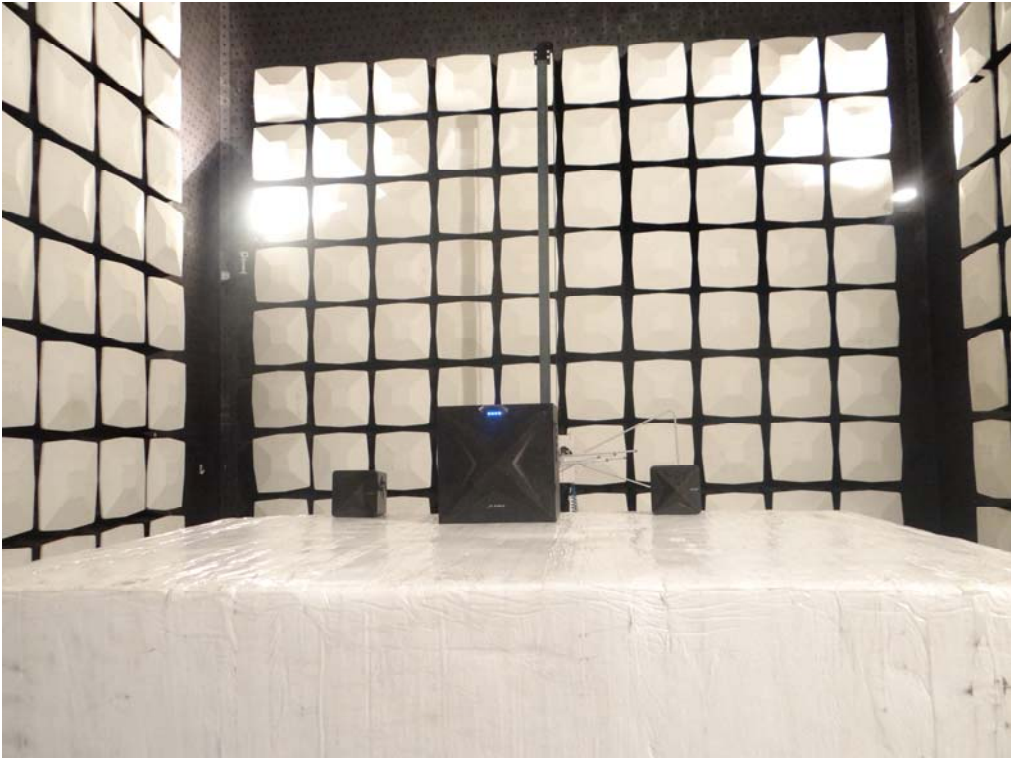

**Radiated Emission Above 1 GHz**



--- End ---